



# IP Multicast – Concepts, Design and Troubleshooting

BRKMPL-1261



# Agenda

- Multicast overview

What is it and when would we use it ?

- Multicast fundamentals

Technical concepts and protocols


- Multicast Design and Configuration

1 case study, 3 solutions

- Troubleshooting common multicast issues


# Multicast Overview

# Unicast vs. Multicast

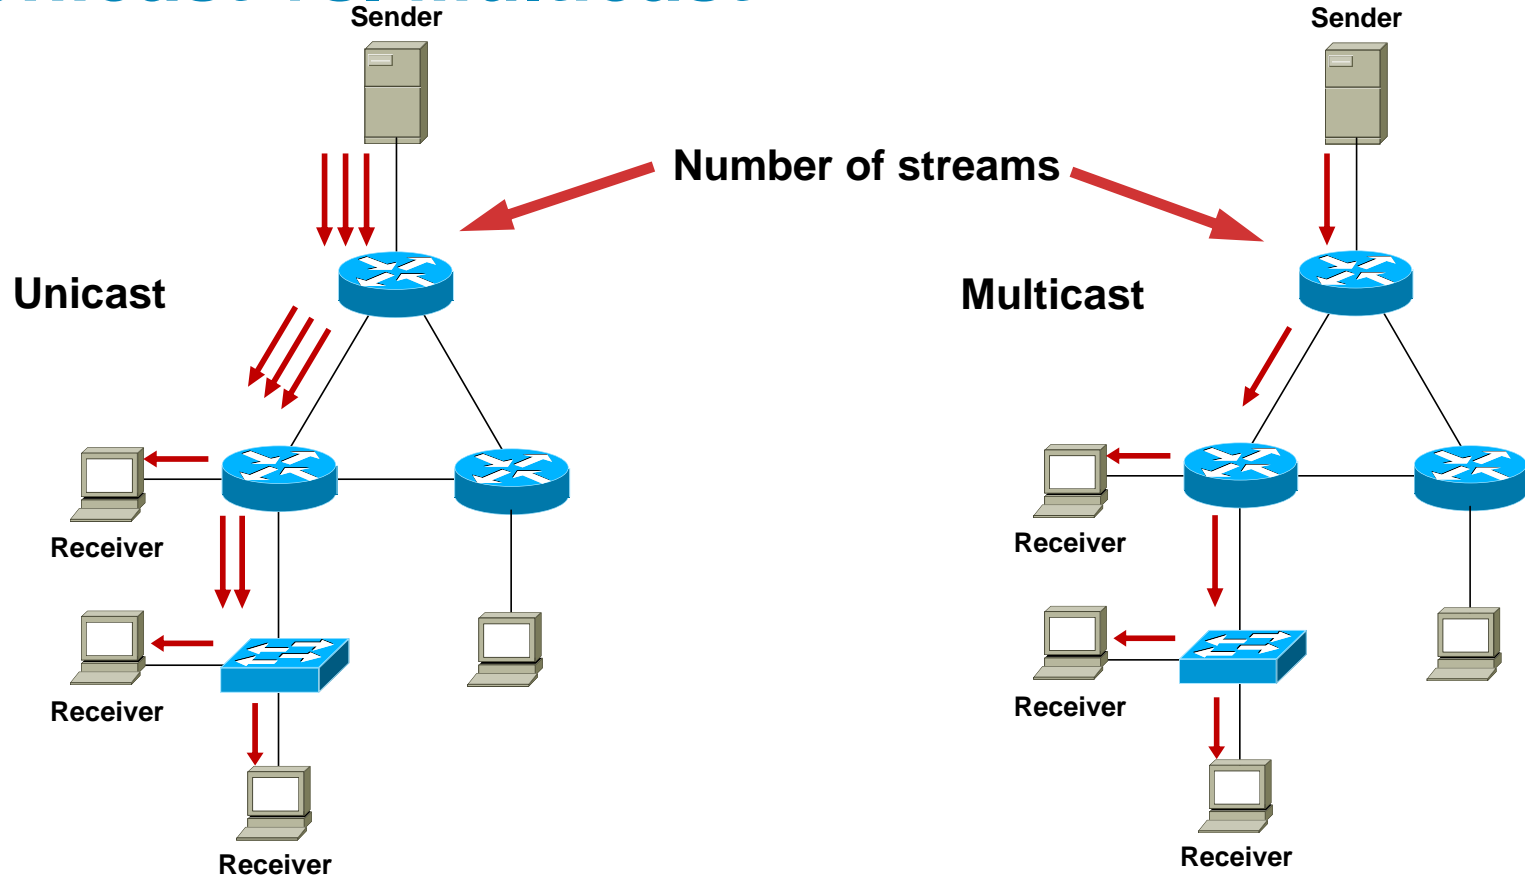


# Broadcast vs Multicast

## Broadcast

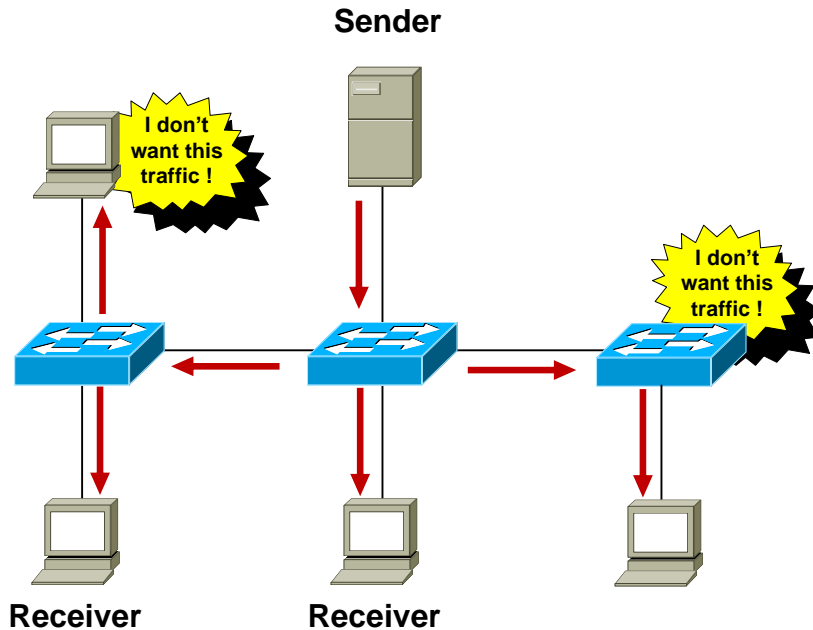

## Multicast

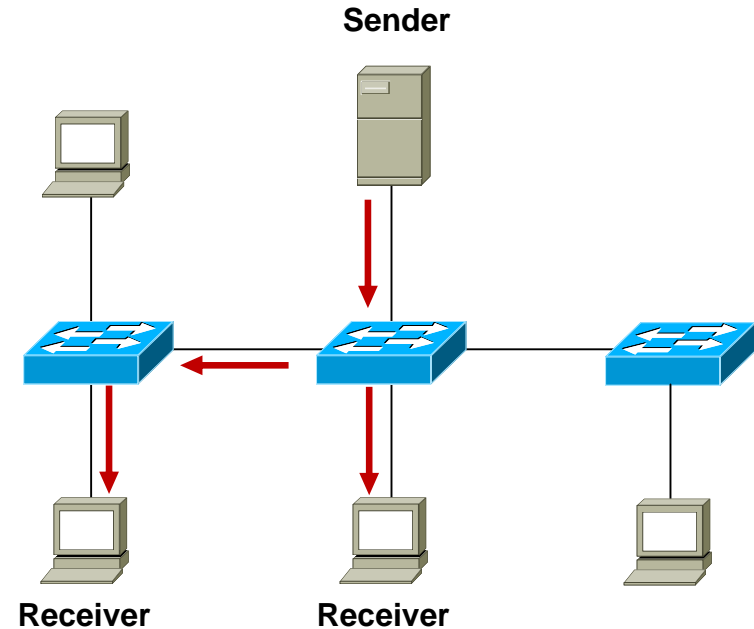

# Multicast Uses

- Any situation where multiple endpoints need to receive identical information at the same time
  - Streaming video, IPTV
  - Music on hold
  - Data replication
  - Periodic data delivery - stock quotes, sports scores, news reports
- Most commonly used for one-to-many or some-to-many data flows

# Multicast Advantages

- **Enhanced scalability:** Network utilisation independent of number of receivers
- **Reduced resource utilisation:** Controls network bandwidth and reduces server and router loads
- **Deterministic performance:** subscriber number 1 and subscriber number 10000 have identical experience

# LOWER TCO


# Multicast Considerations

- **Multicast is UDP-based:** No flow control, sequencing, error-correction, retransmissions.
- **“Best effort” delivery:** The sender has no idea if all the subscribers have received the data, and likewise the subscribers have no way of telling if they have missed a multicast packet. Applications should be capable of handling missed packets.
- **No congestion avoidance:** Lack of TCP windowing and “slow-start” mechanisms can result in network congestion; if possible, multicast applications should attempt to detect and avoid congestion conditions.
- **Added Complexity:** If you have the bandwidth available then unicast delivery model can be a simpler option.



# Multicast Fundamentals

# Multicast Service Model Overview

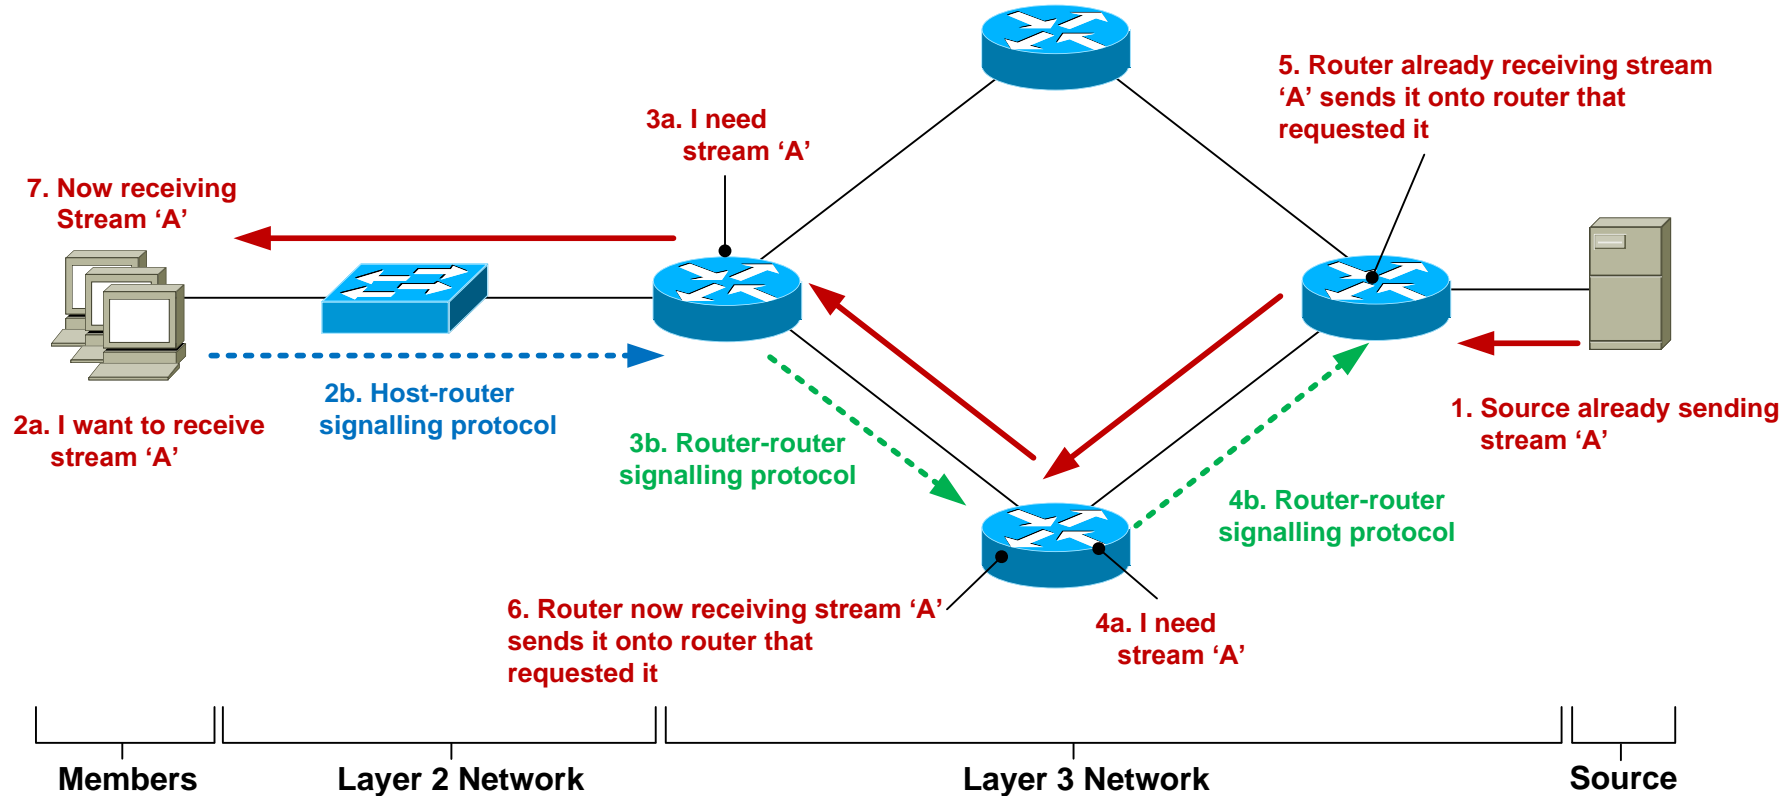

# IP Multicast Source

- Any device that sends an IP packet with a destination address between 224.0.0.0 – 239.255.255.255
- A device can be a multicast sender and a multicast receiver at the same time
- There is no multicast control traffic between the sender and the network, or between the sender and receiver.

**Q. So how does the source know when to send traffic ?**

**A. An application tells the source to start transmitting.**

# IP Multicast Source


- Source address

Unique unicast IP address of the packet source (same as non-multicast traffic)

- Destination address

Class 'D' address range used to represent a **group** of receivers rather than a unique end host

224.0.0.0 – 239.255.255.255

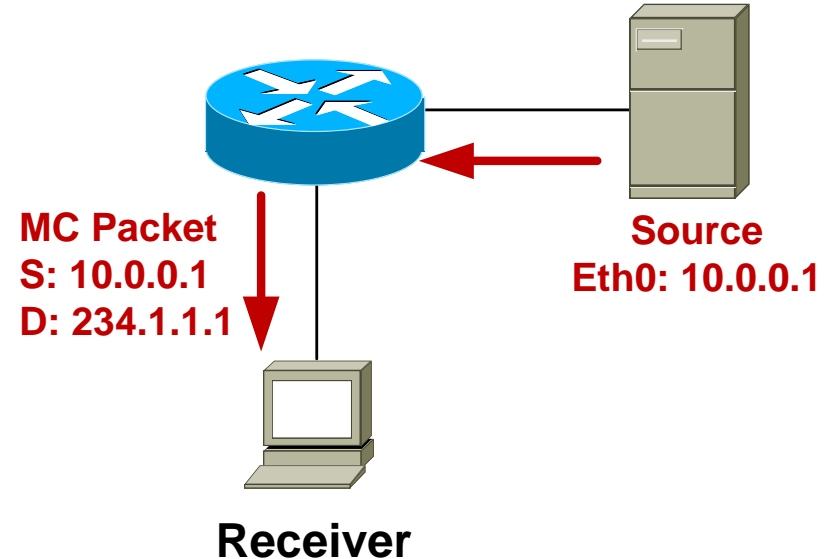

# Multicast Addressing—224/4

- IANA Reserved addresses (never use these !)

224.0.0.0 – 224.0.0.255

Local network control block

224.0.1.0 – 224.0.1.255

Internet network control block

- Other IANA allocated address ranges

232.0.0.0 – 232.255.255.255

Source Specific Multicast

233.0.0.0 – 234.255.255.255

GLOP/UBM Addressing

239.0.0.0 – 239.255.255.255


‘Private’ multicast range

- Check <http://www.iana.org/assignments/multicast-addresses/multicast-addresses.xml>

# Multicast Addressing


**Be Aware of the 32:1 Address Overlap for L3-L2 address mapping**

## 32-IP Multicast Addresses

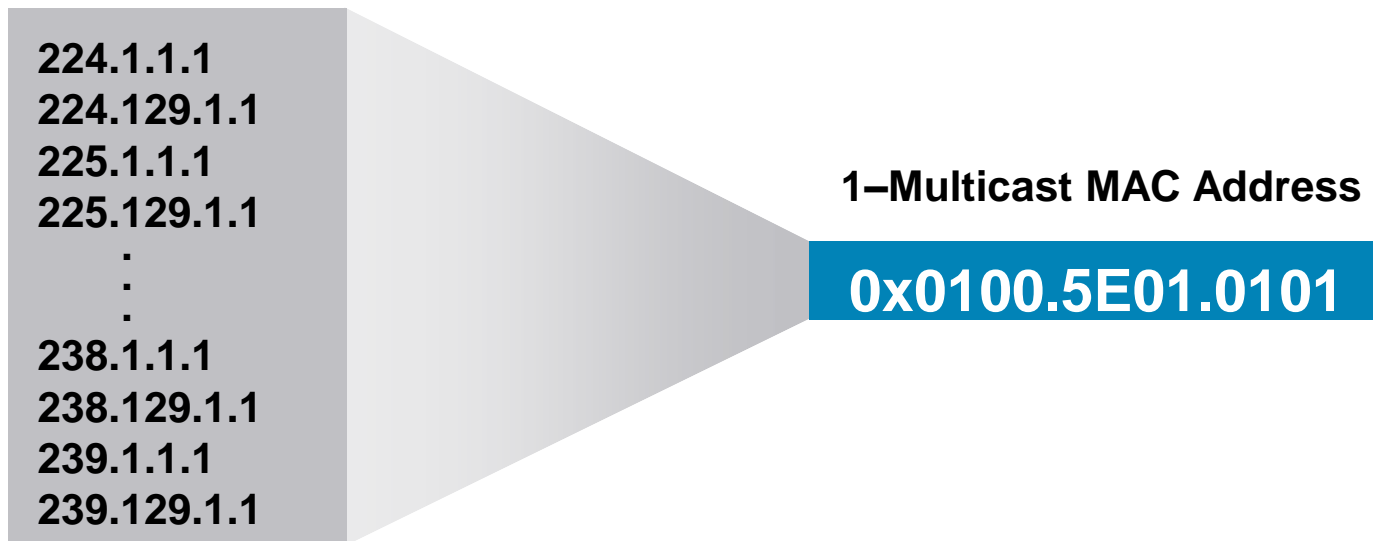

[http://www.cisco.com/en/US/tech/tk828/technologies\\_white\\_paper09186a00802d4643.shtml](http://www.cisco.com/en/US/tech/tk828/technologies_white_paper09186a00802d4643.shtml)

# Multicast Service Model Overview – Layer 2

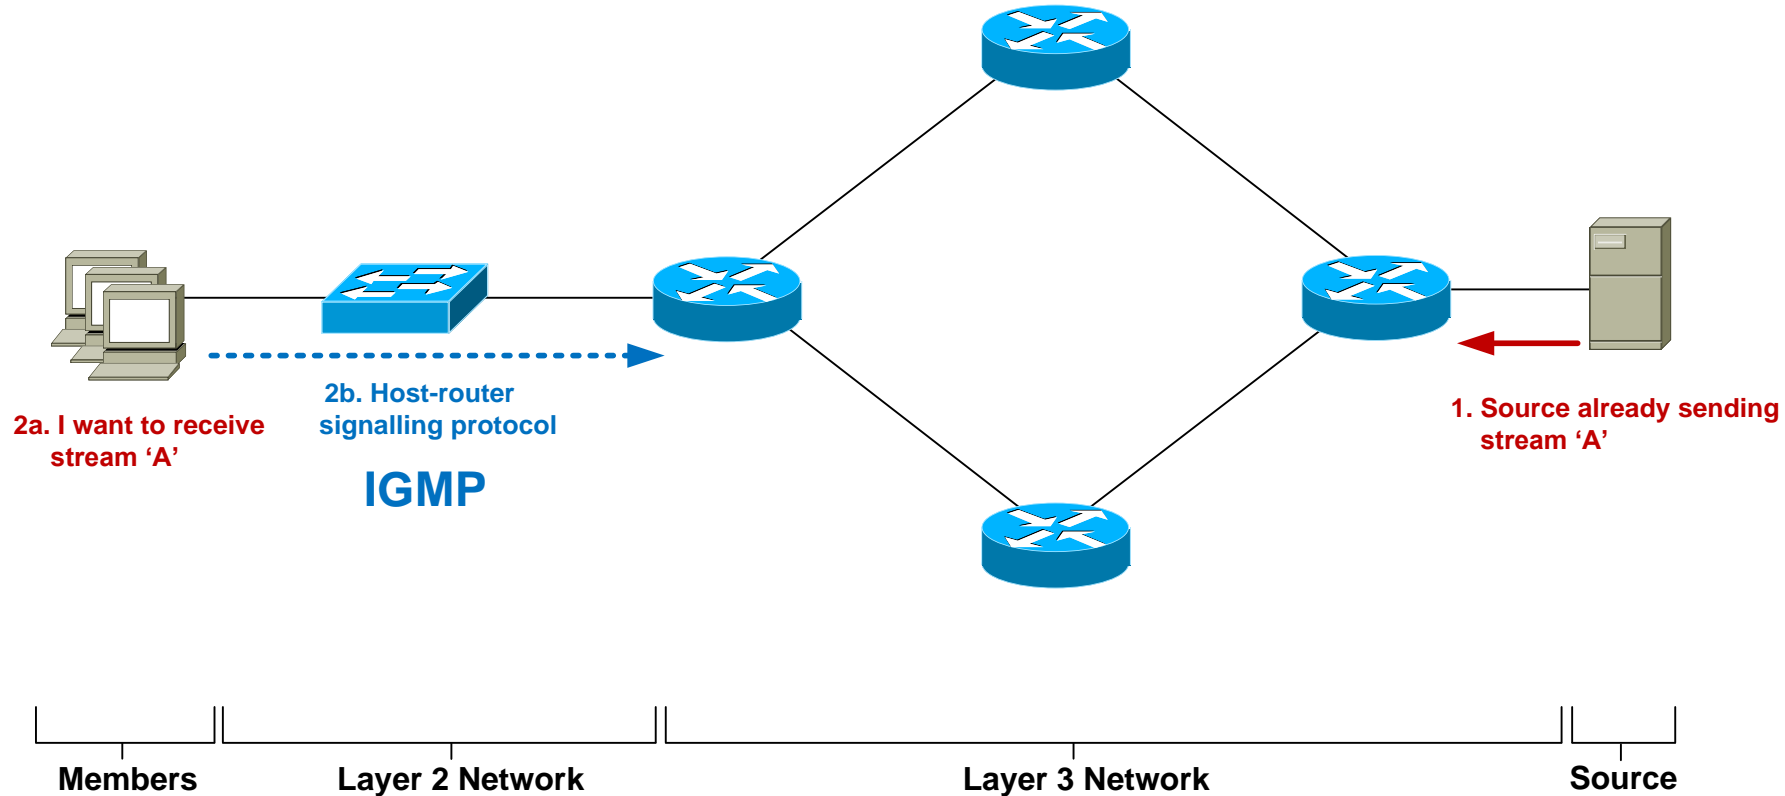


# Host-Router Signalling: IGMP


- Internet **G**roup **M**anagement **P**rotocol
- Used by a **host** to notify the local **router** that it wishes to receive (or stop receiving) multicast traffic for a given destination address or “group”.
- RFC 2236 specifies version 2 of IGMP  
Most widely deployed and supported
- RFC 3376 specifies version 3 of IGMP  
Good network support but host implementations still patchy




# IGMPv2 – Joining a Group

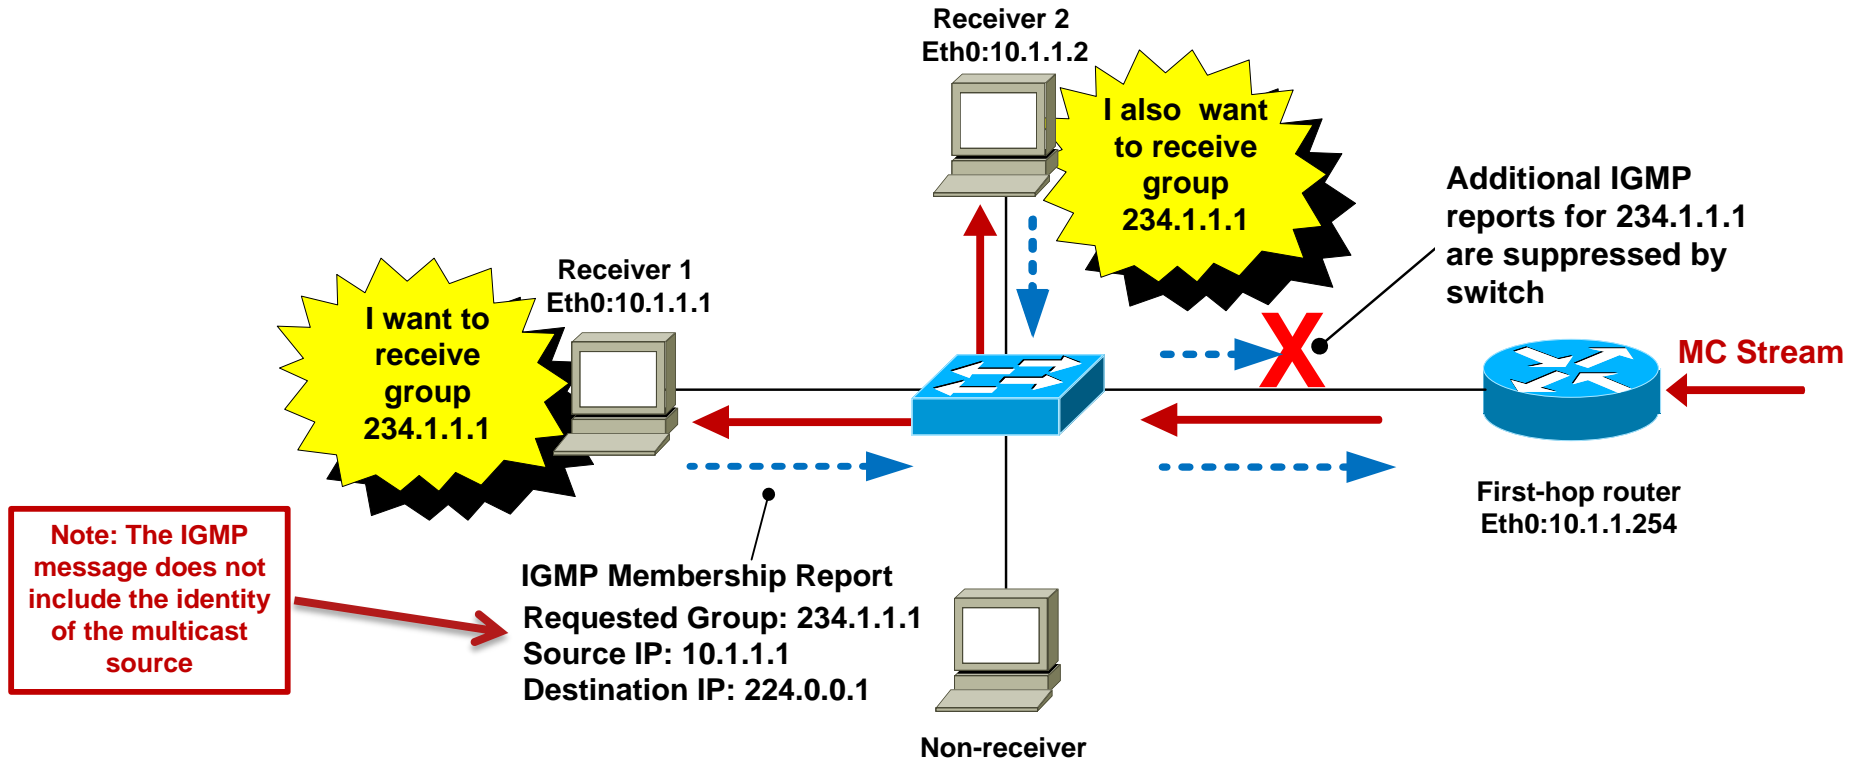


# IGMPv2 – Maintaining a Group

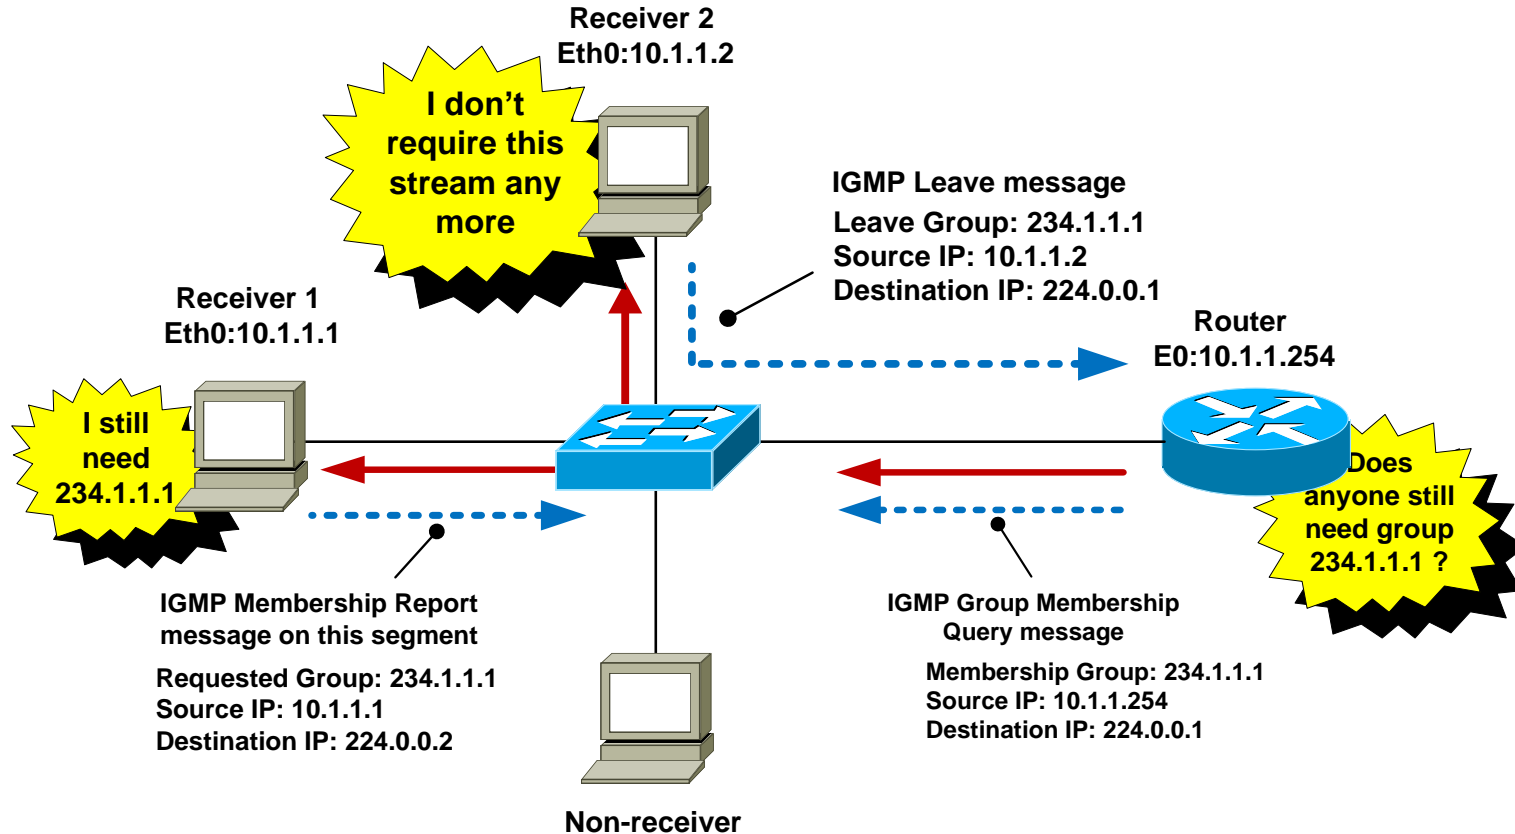


# IGMPv2 – Leaving a Group

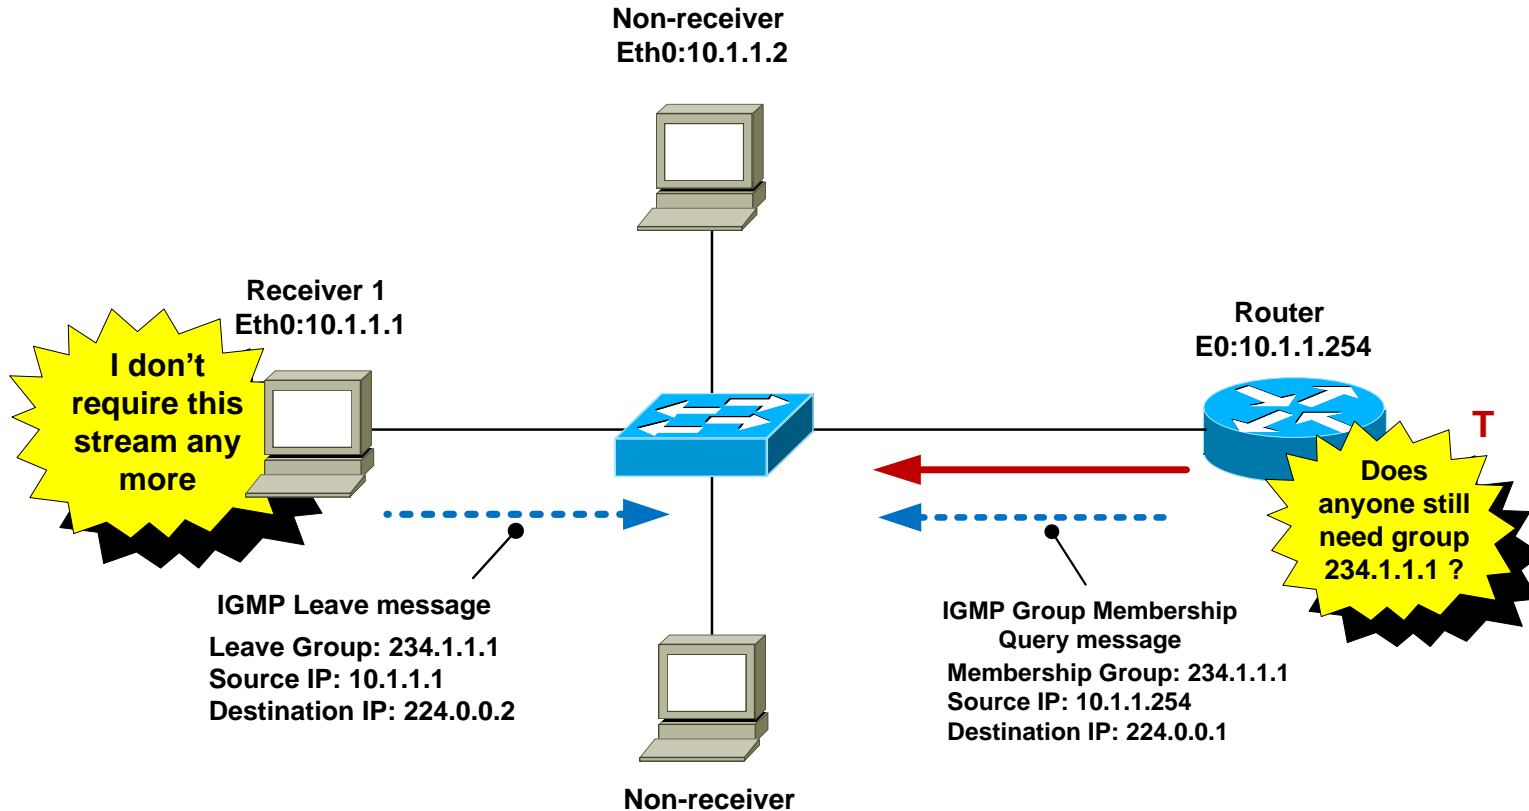

# IGMPv2 – Leaving a Group

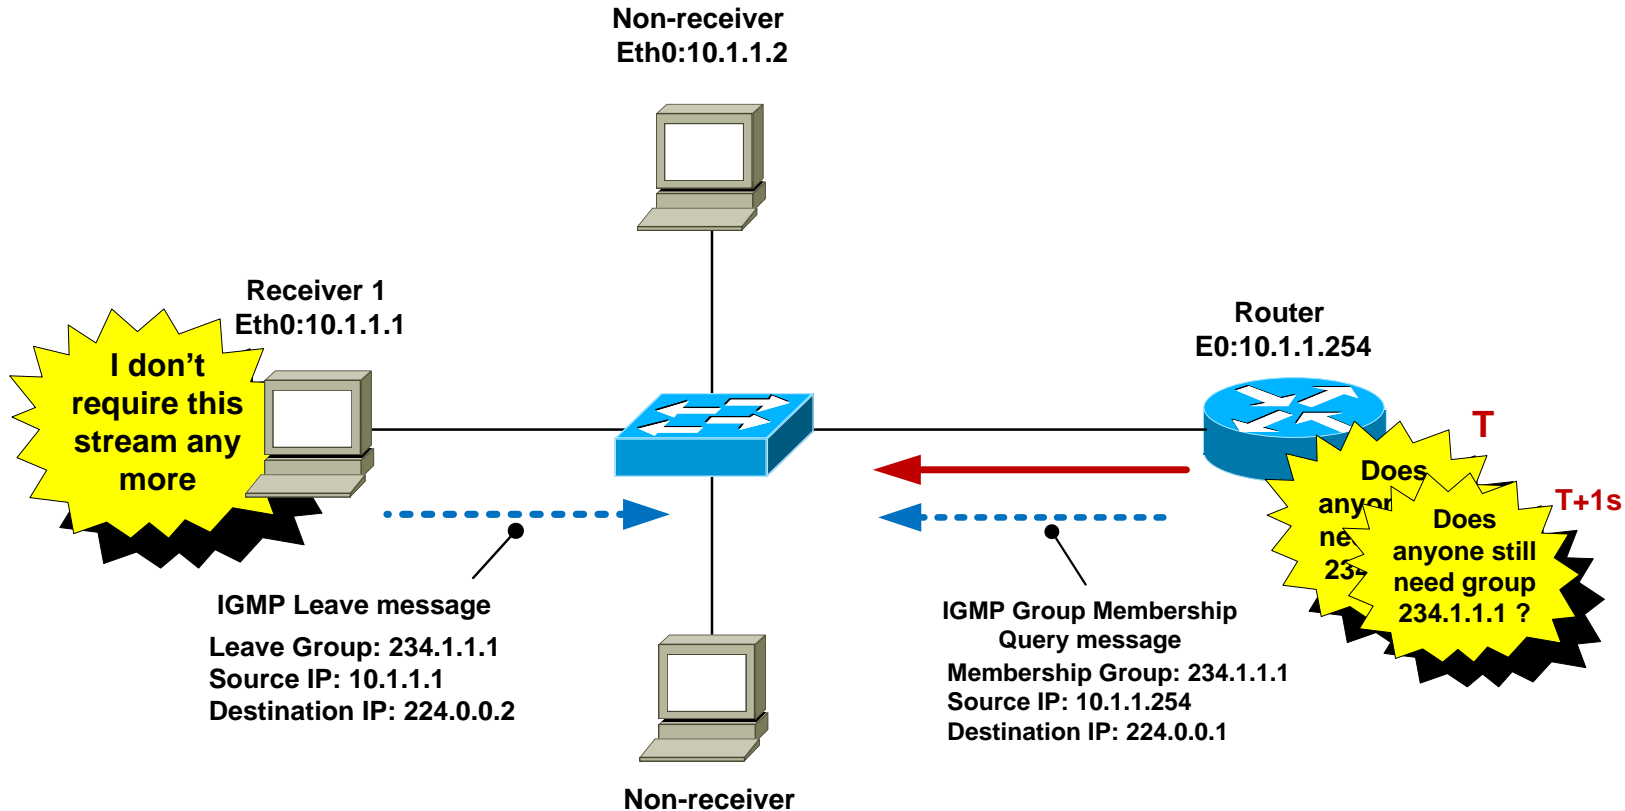

# IGMPv2 – Leaving a Group

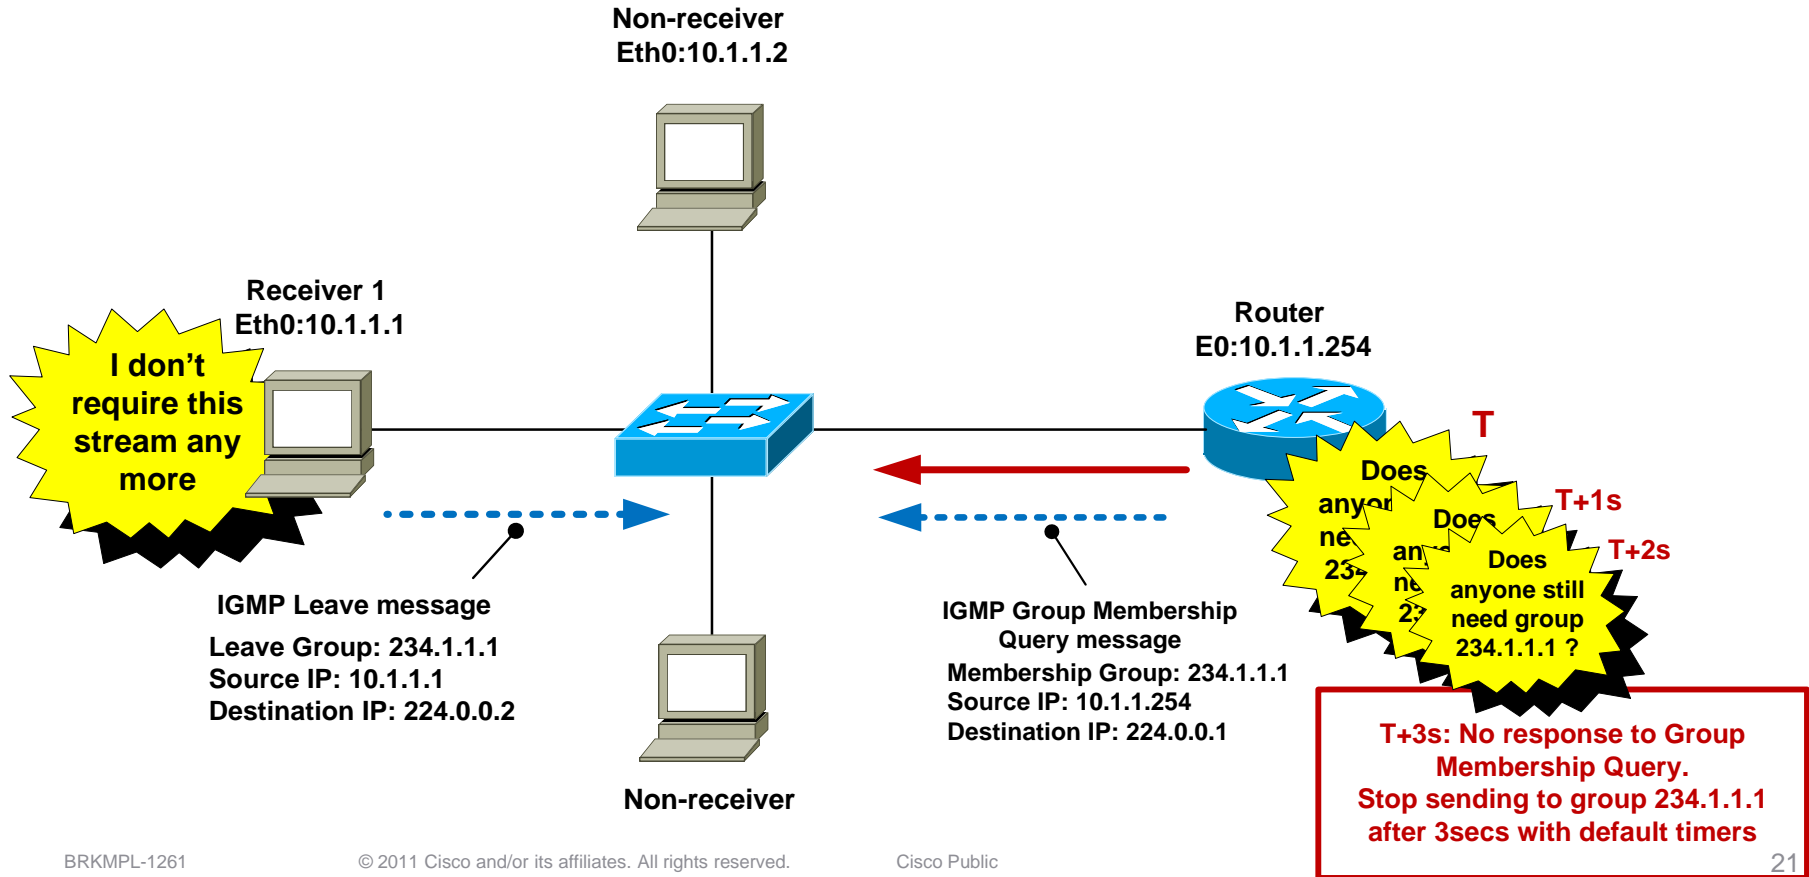

# IGMP Snooping

- By default, switches forward all layer 2 multicast frames to all ports (except the originating port)
- IGMP snooping allows the switch to send multicast frames only to those receivers that join a particular group by listening for report/leave messages from the hosts
- IGMP snooping is on by default in IOS-based switches
- Replaces Cisco Group Management Protocol (CGMP)


# Advantages of IGMP Snooping

- Hosts only receive MC traffic that they request
- Report suppression – prevents first-hop router from being flooded with IGMP reports for the same group
- “Fast-leave” functionality – stop sending MC group as soon as switch hears a “leave” on an interface

**Q. When would IGMP snooping fast-leave be a bad idea ?**

**A. When there is more than 1 receiver attached to an interface**

# Multicast Service Model Overview – Layer 3

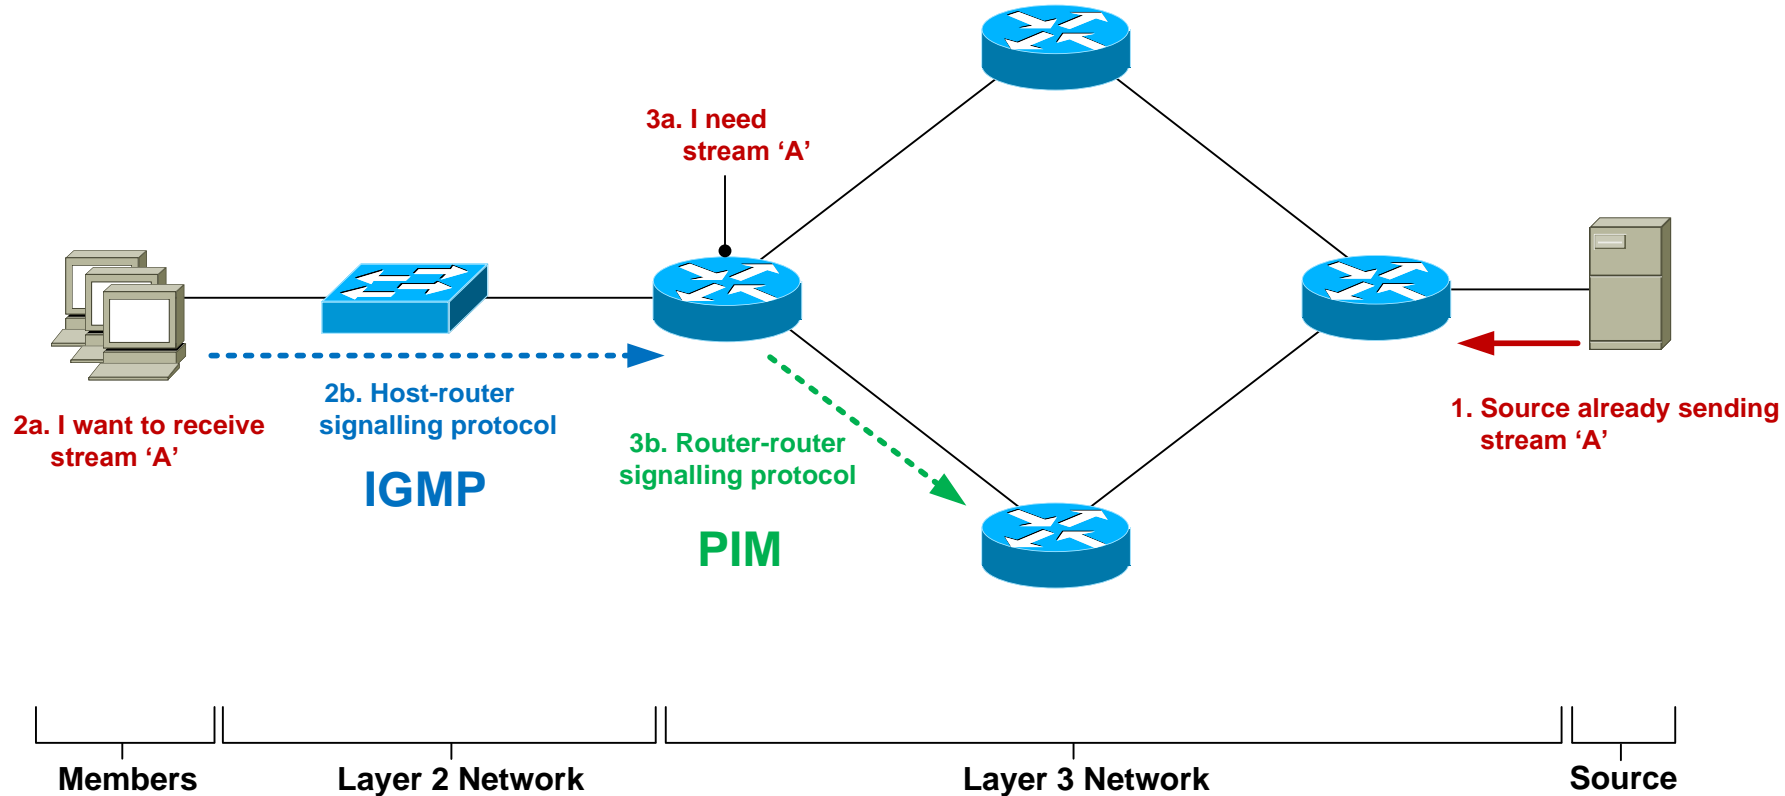



# Router-Router Signalling: PIM

- **P**rotocol **I**ndependent **M**ulticast
- Used by a **router** to notify an upstream **router** that it wishes to receive (or stop receiving) multicast traffic for a given group.

- 3 main classifications of PIM

Any Source Multicast (asm-pim) – 3 “modes”

**Legacy** ~~← Dense, sparse, sparse dense →~~ **Cisco Proprietary**

Source-Specific Multicast (pim-ssm)

~~Bidirectional (pim-bidir)~~ **→ Only for specific-use cases (many senders)**


# Router-router signalling: PIM-SM

- Each router forms a neighbour relationship with adjacent PIM routers using PIM “hello” messages
- When a router wants to receive a multicast stream, it sends a PIM “join” message towards the IP address of the multicast source
- When a router wants to stop receiving a multicast stream, it sends a PIM “prune” message towards the IP address of the multicast source

# RPF Mechanism

- Multicast traffic flows from the sender back down the path created by the PIM messages. This is known as **Reverse Path Forwarding (RPF)**.
- All received multicast traffic is subject to an **RPF check**
  - Is the incoming MC traffic being received via the interface on which I sent the PIM request ?
  - RPF check **PASS** = accept MC traffic and send it on
  - RPF check **FAIL** = drop traffic on floor
  - Prevents loops and duplicate packets


# RPF Mechanism

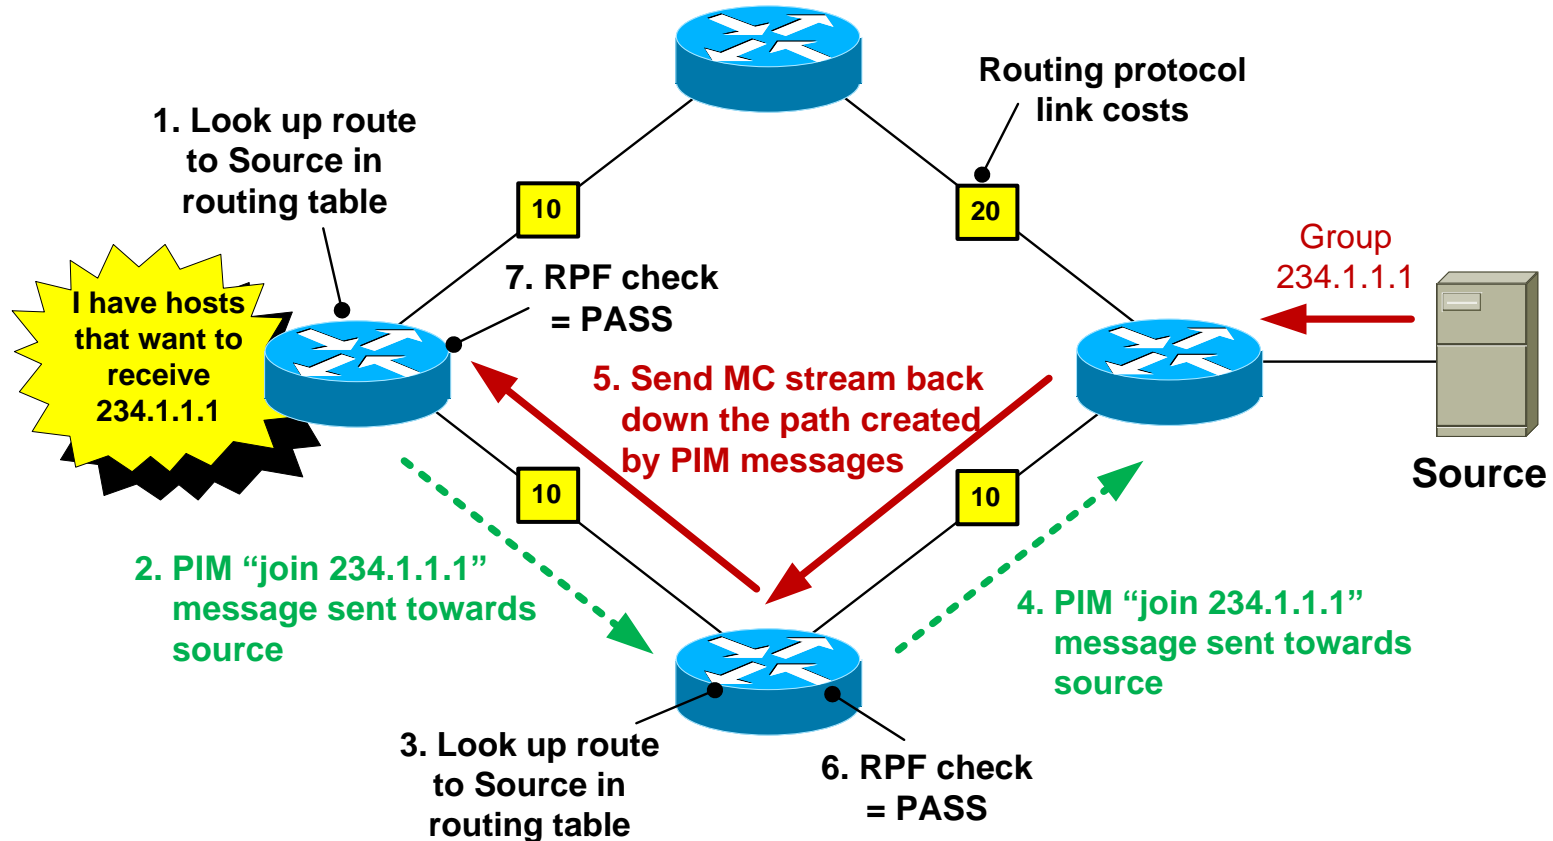


# Static Multicast Routes

- Static multicast routes can be used to send PIM messages down a different path than would be selected from the unicast routing table.
- Useful if you want MC traffic to travel over different links to unicast traffic
- Best suited for small networks due to scalability issues managing many static routes.
- Be careful of creating PIM routing loops !


# Static Multicast Routes

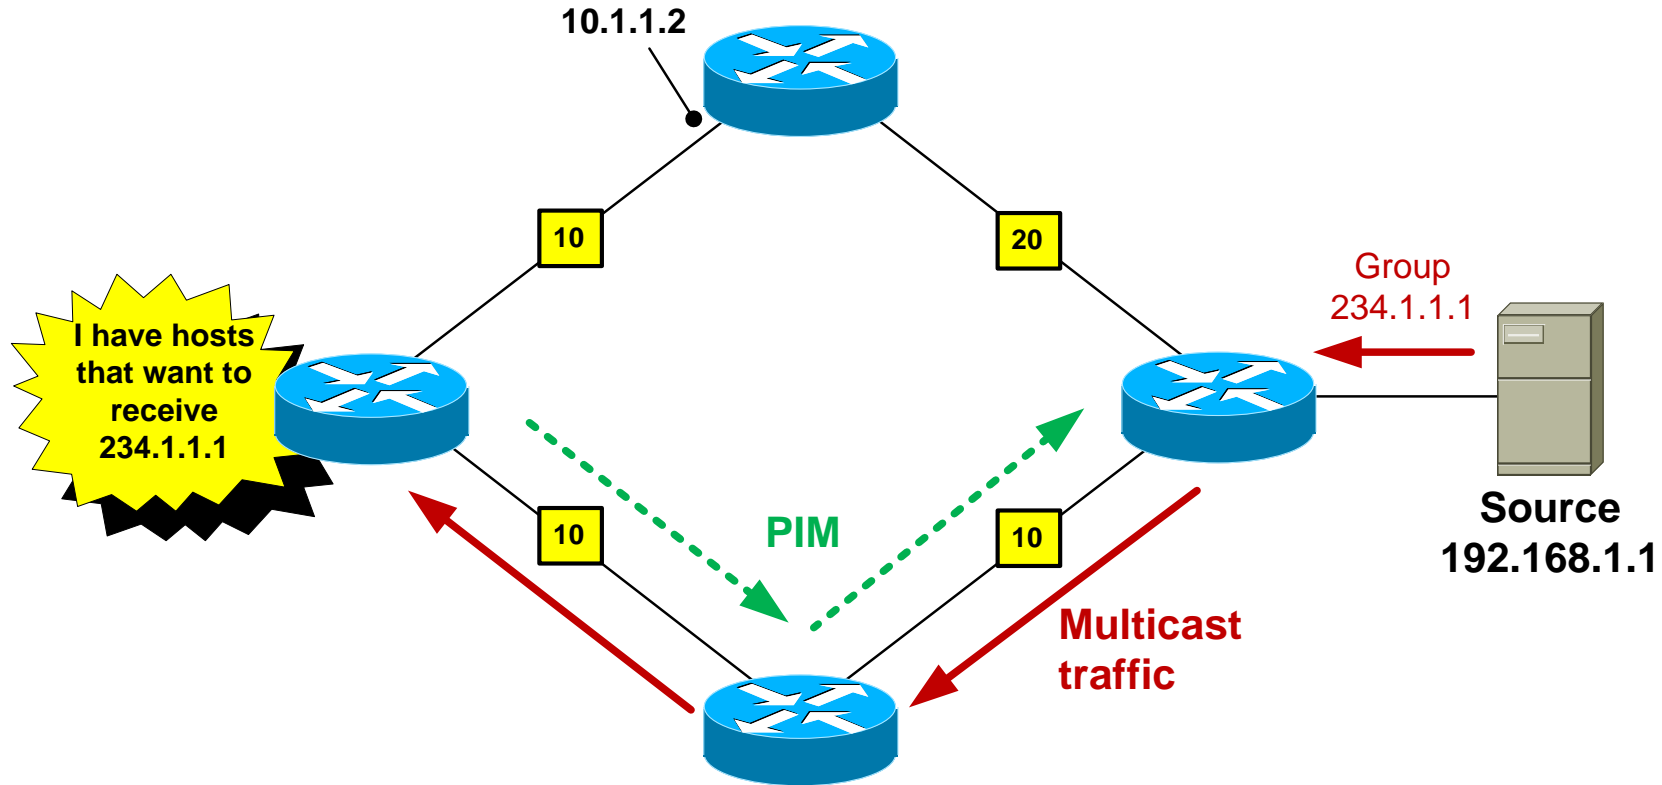

# Static Multicast Routes

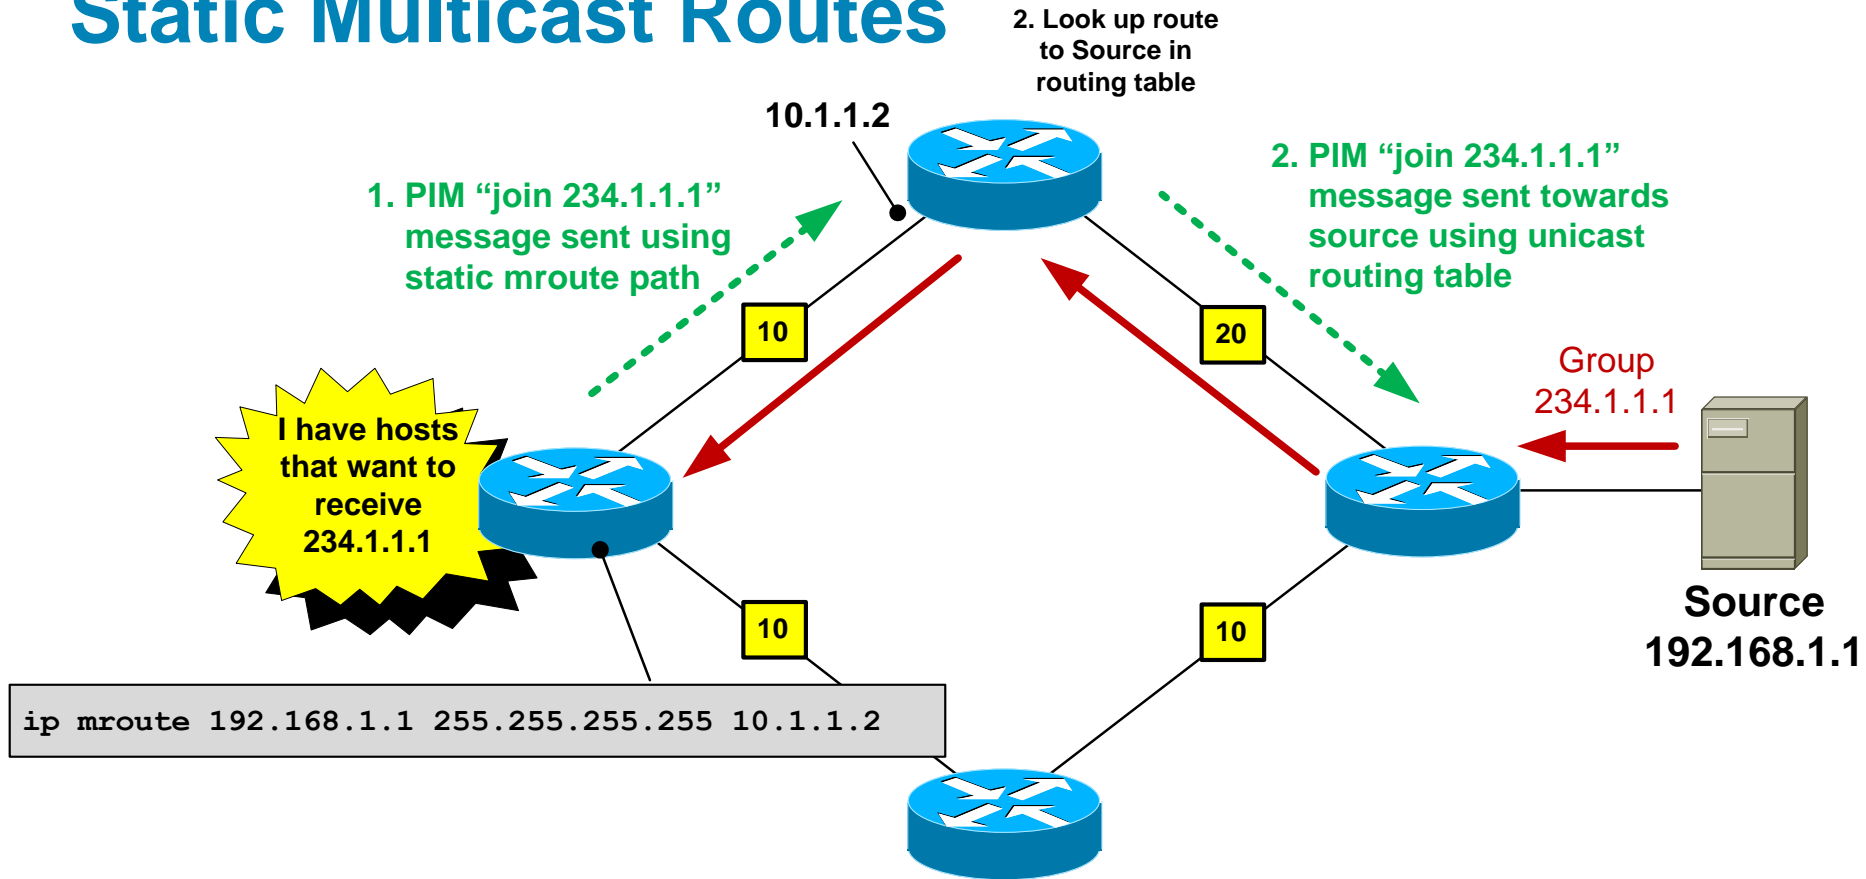


# Static Multicast Routing Loop

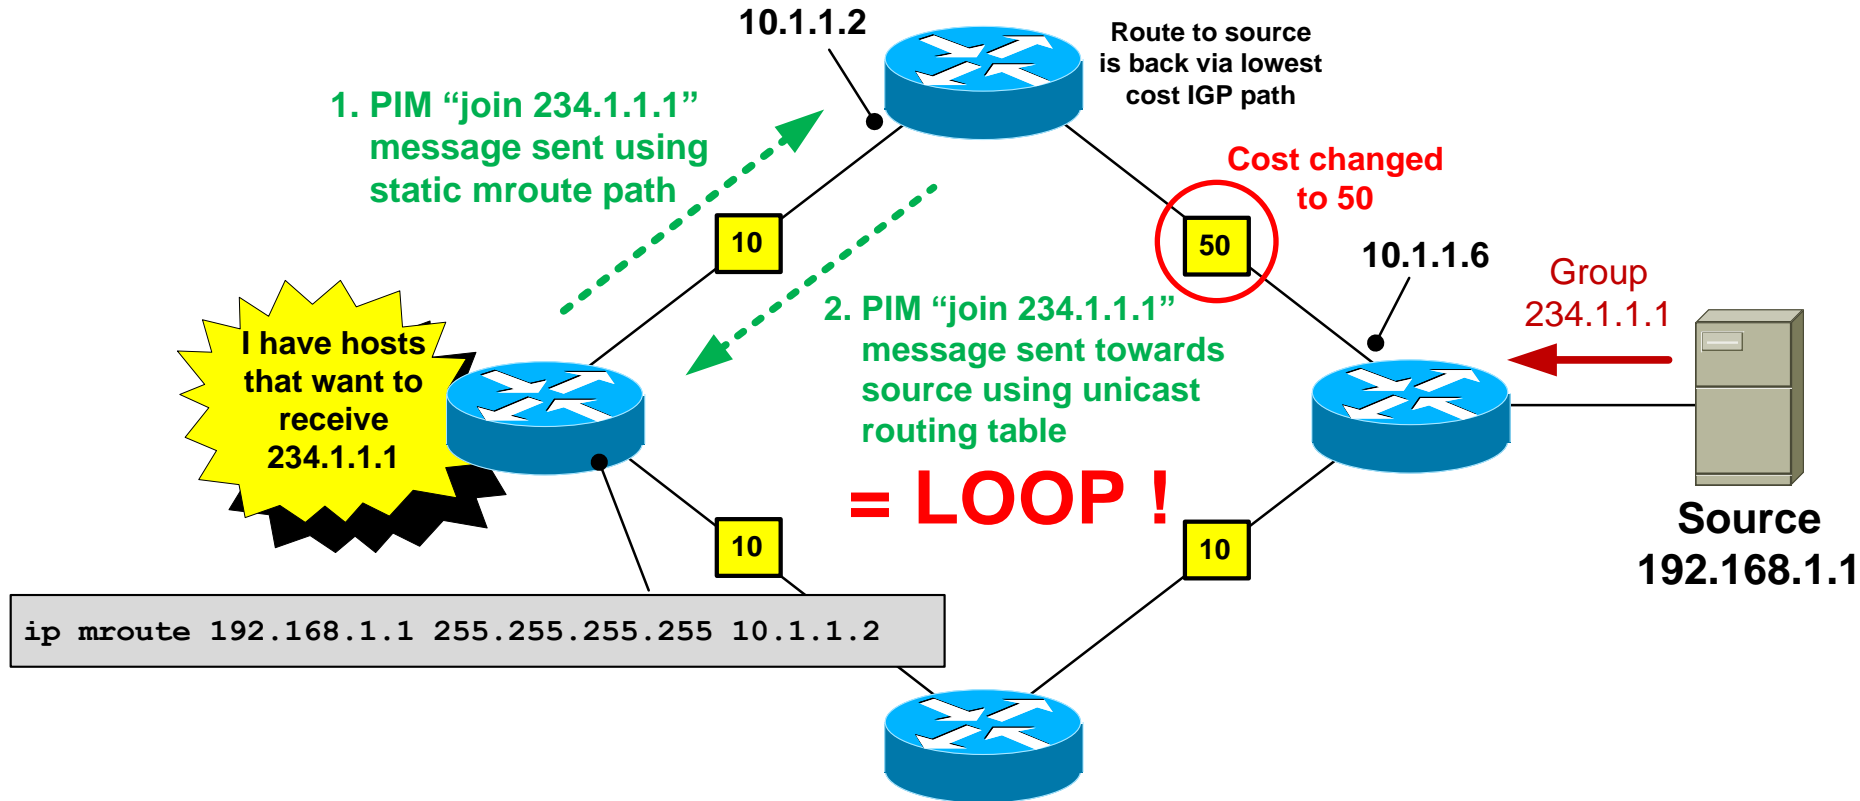




# Static Multicast Routing Loop

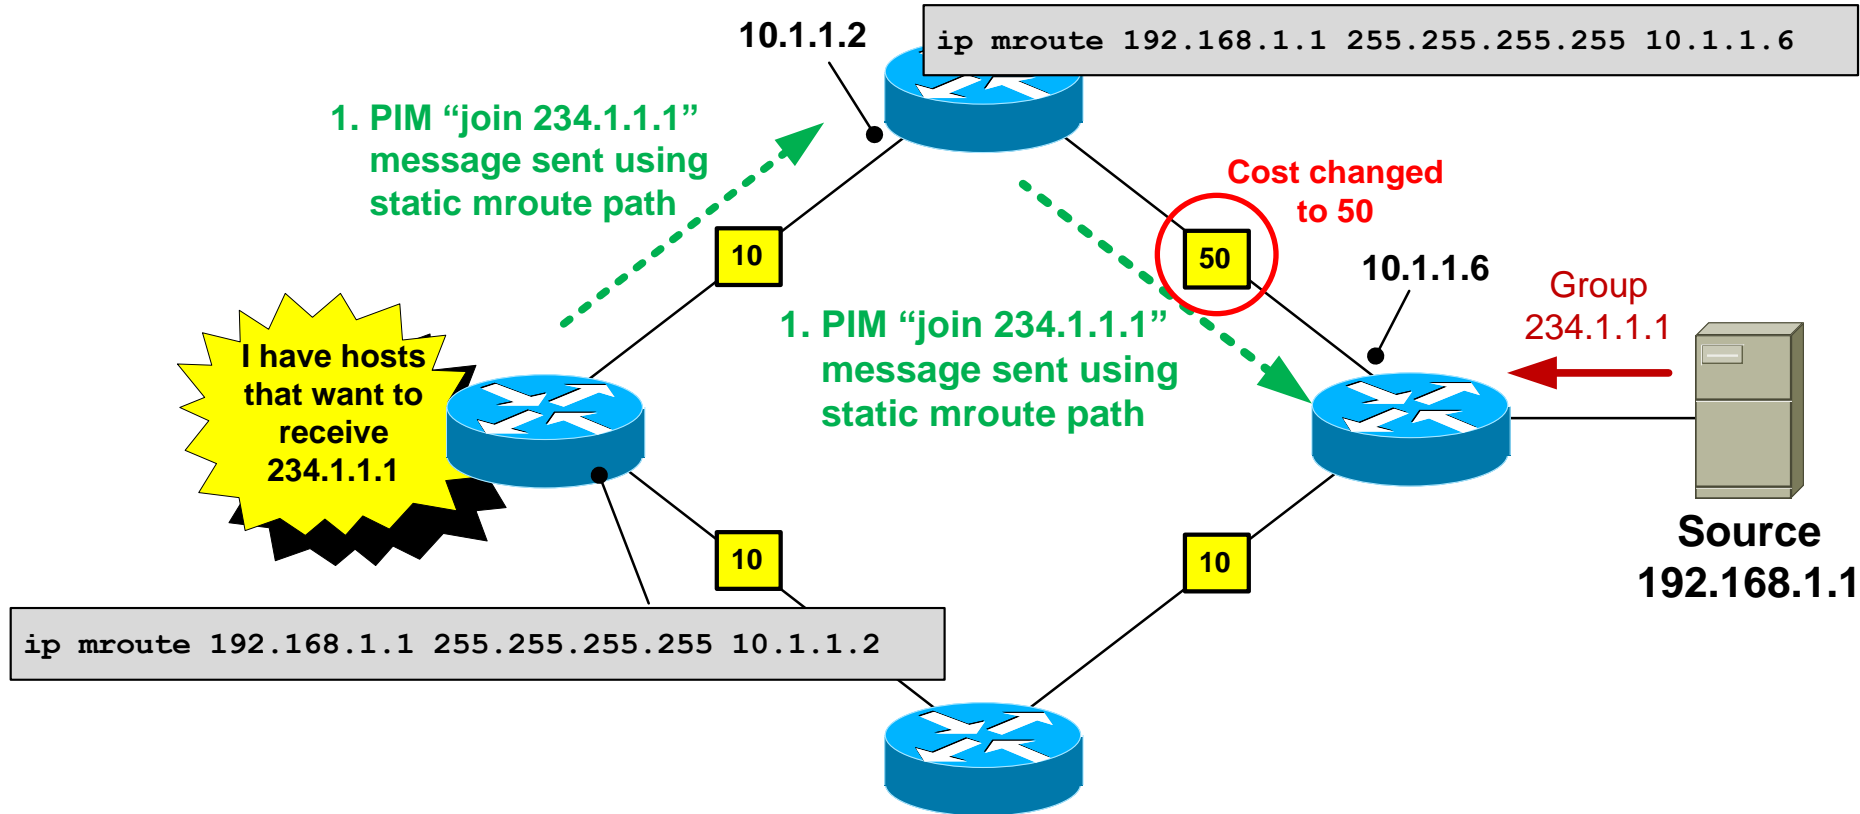


# Static Multicast Routing Loop

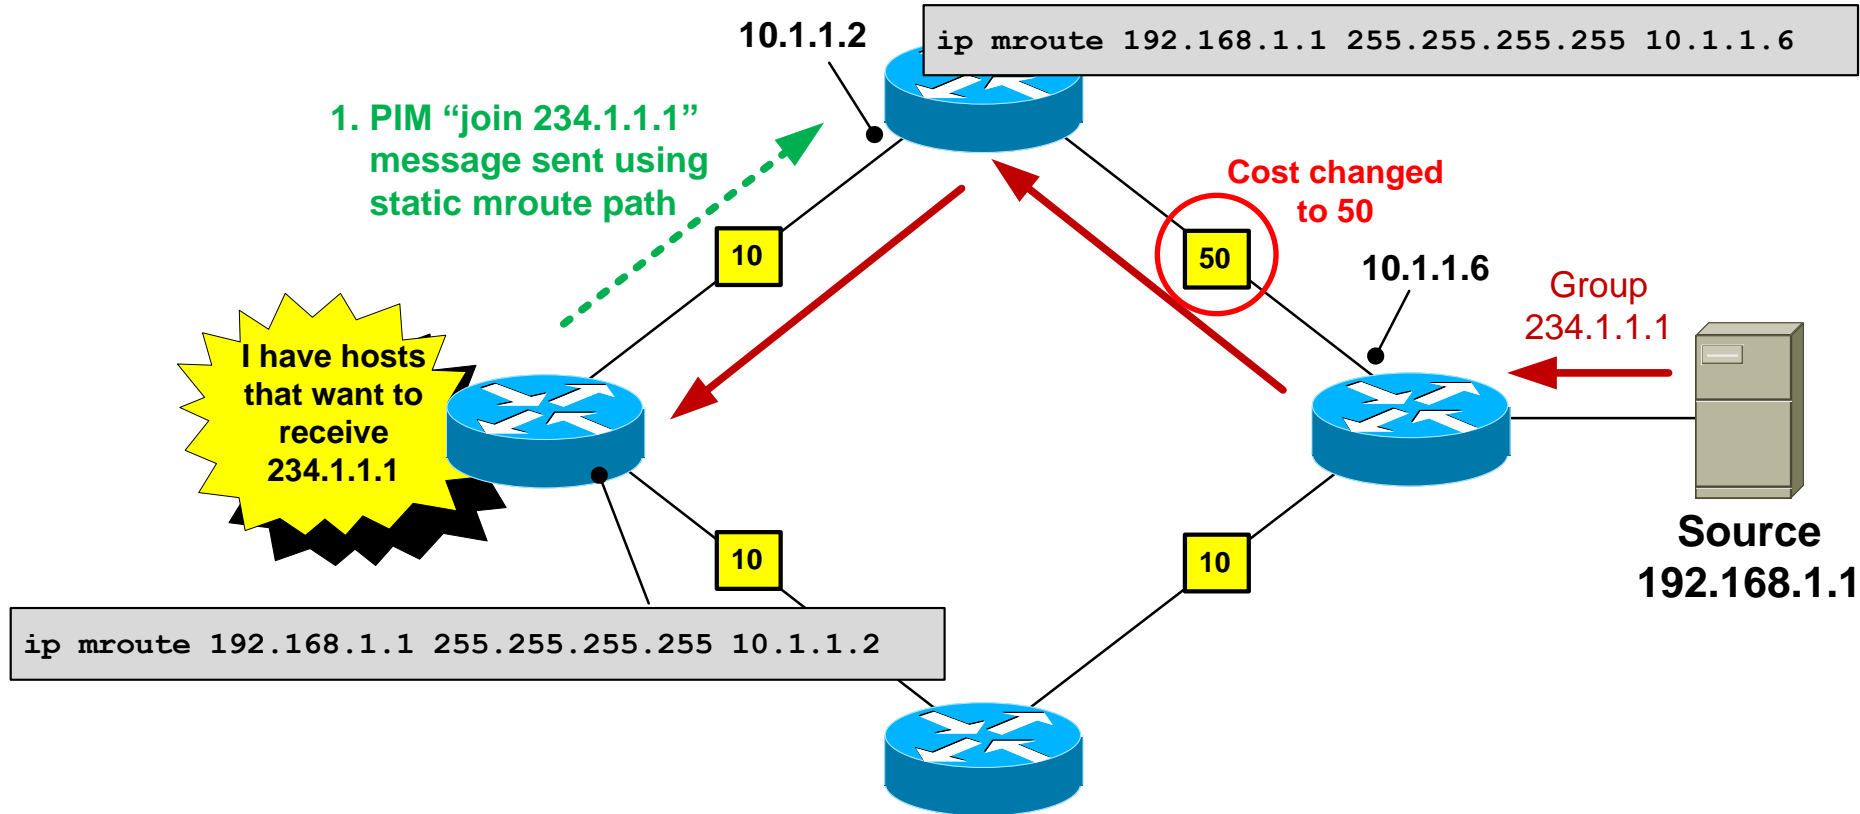

# Router-router signalling: PIM-SM


- But.....we have a problem. The receiver just told me the group it wants to join but didn't identify the source! So in which direction is the "upstream" router ?

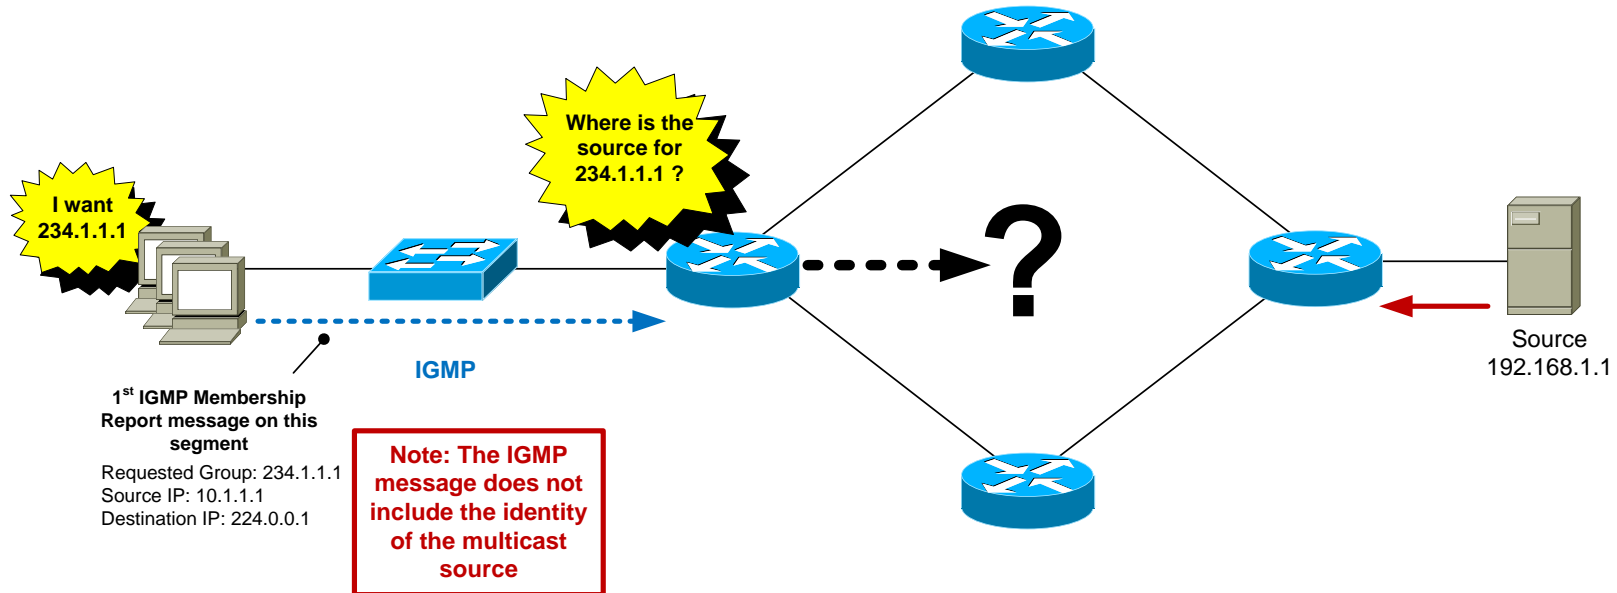


# PIM-SM: Rendezvous Point (RP)

- PIM-SM uses a router called a Rendezvous Point (RP).
- The sole purpose of the RP is to allow the first-hop router to find out the IP address of the source for a particular group.
- The receivers don't know the source address and don't care - hence the term "Any Source Multicast".
- An RP is **mandatory** for PIM sparse-mode networks.


# PIM-SM: Rendezvous Point (RP)

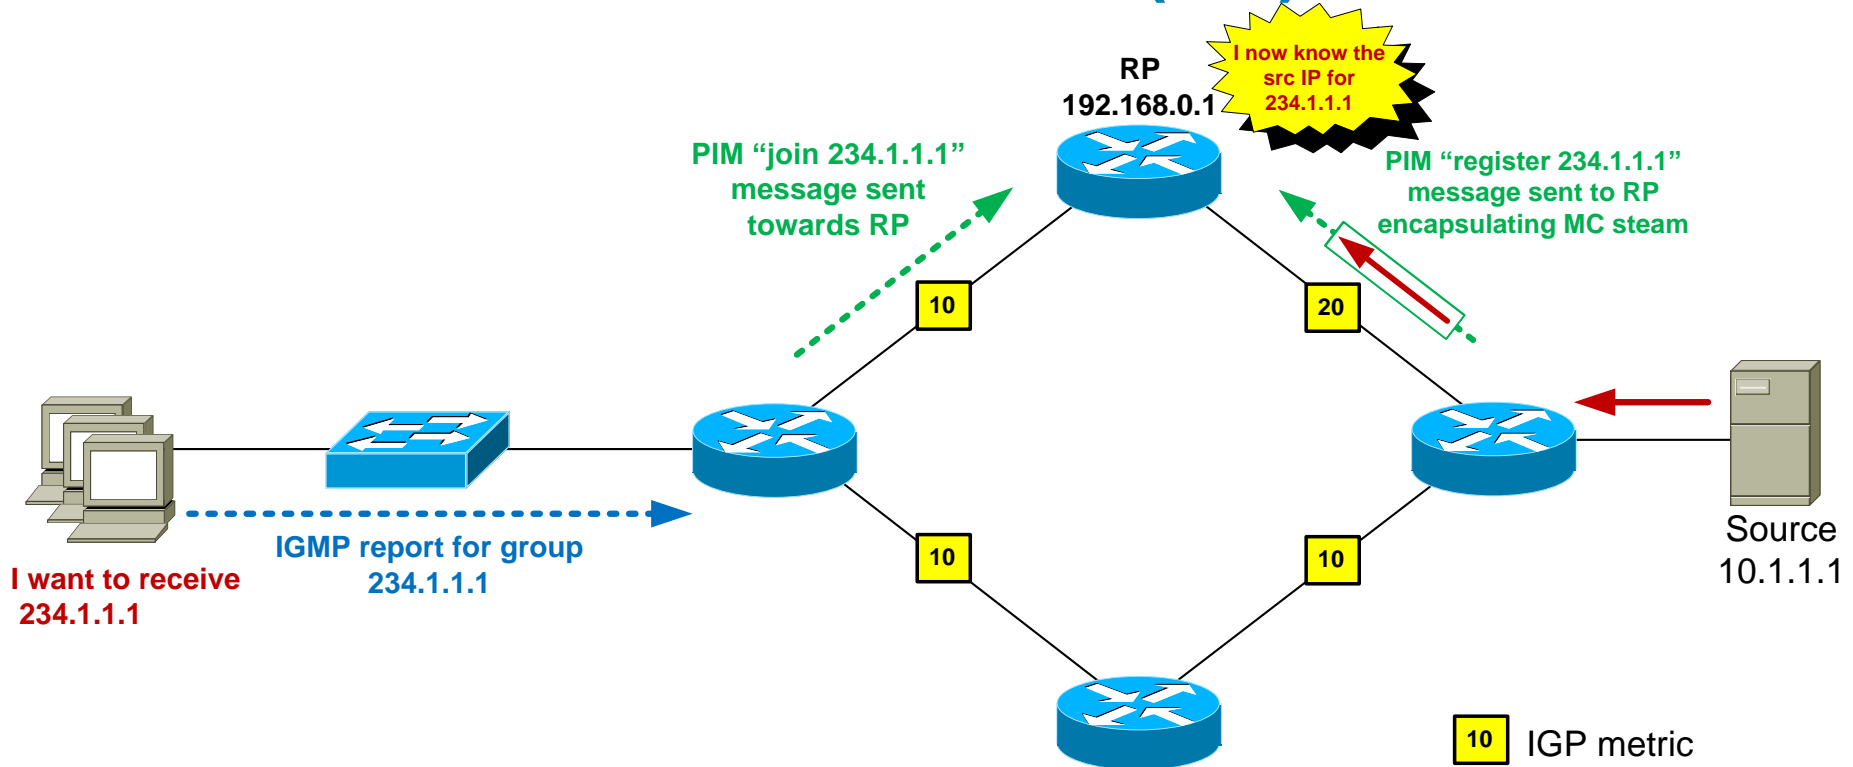


# PIM-SM: Rendezvous Point (RP)

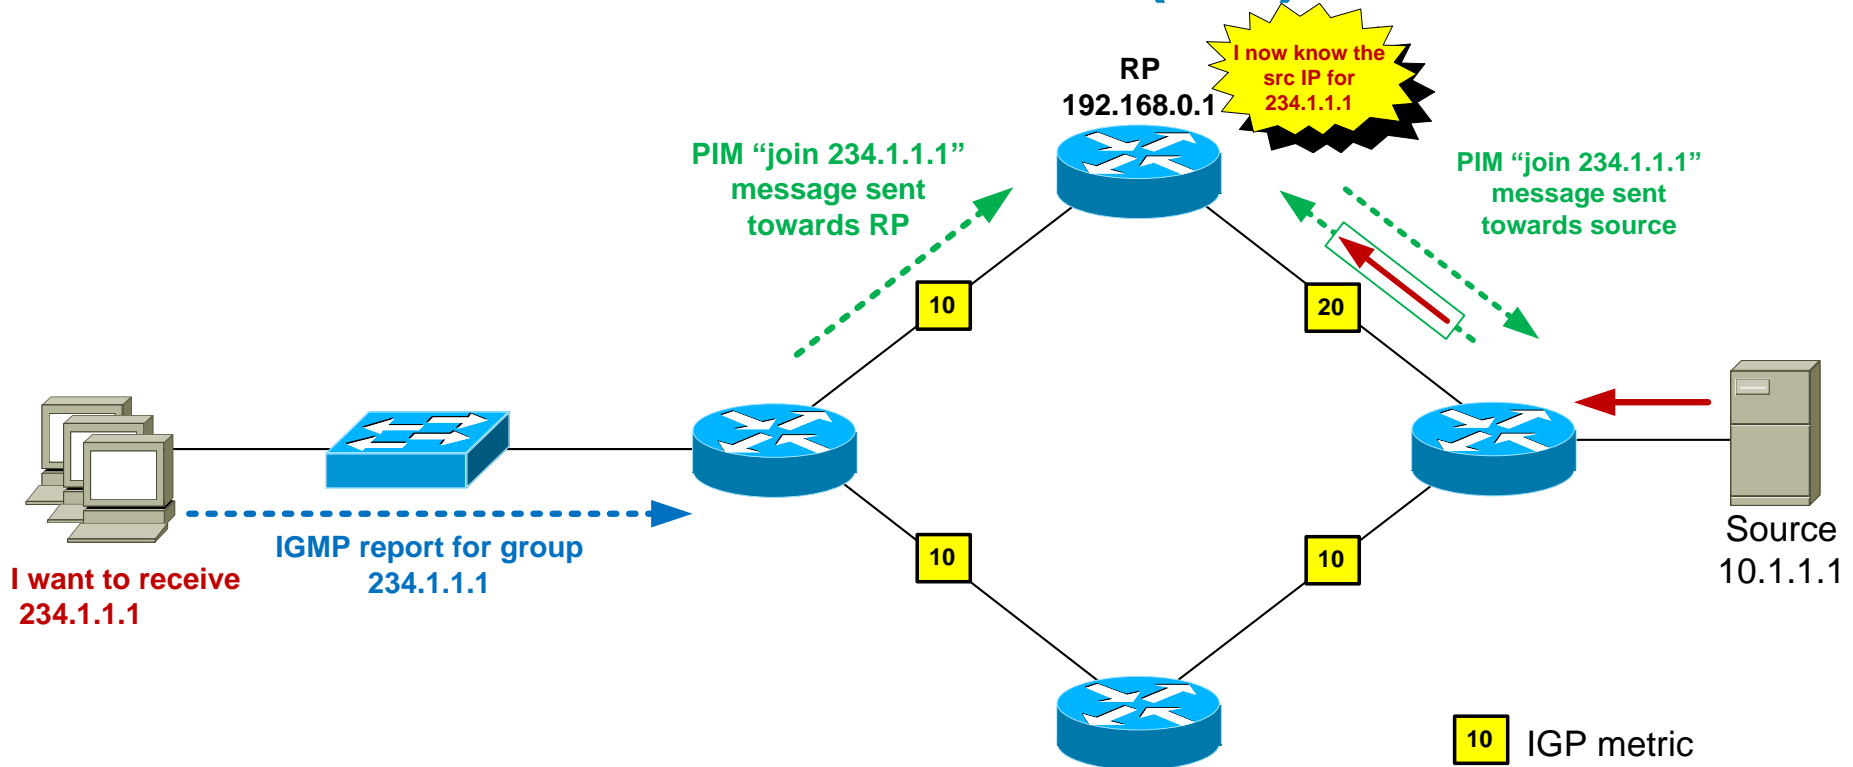

# PIM-SM: Rendezvous Point (RP)

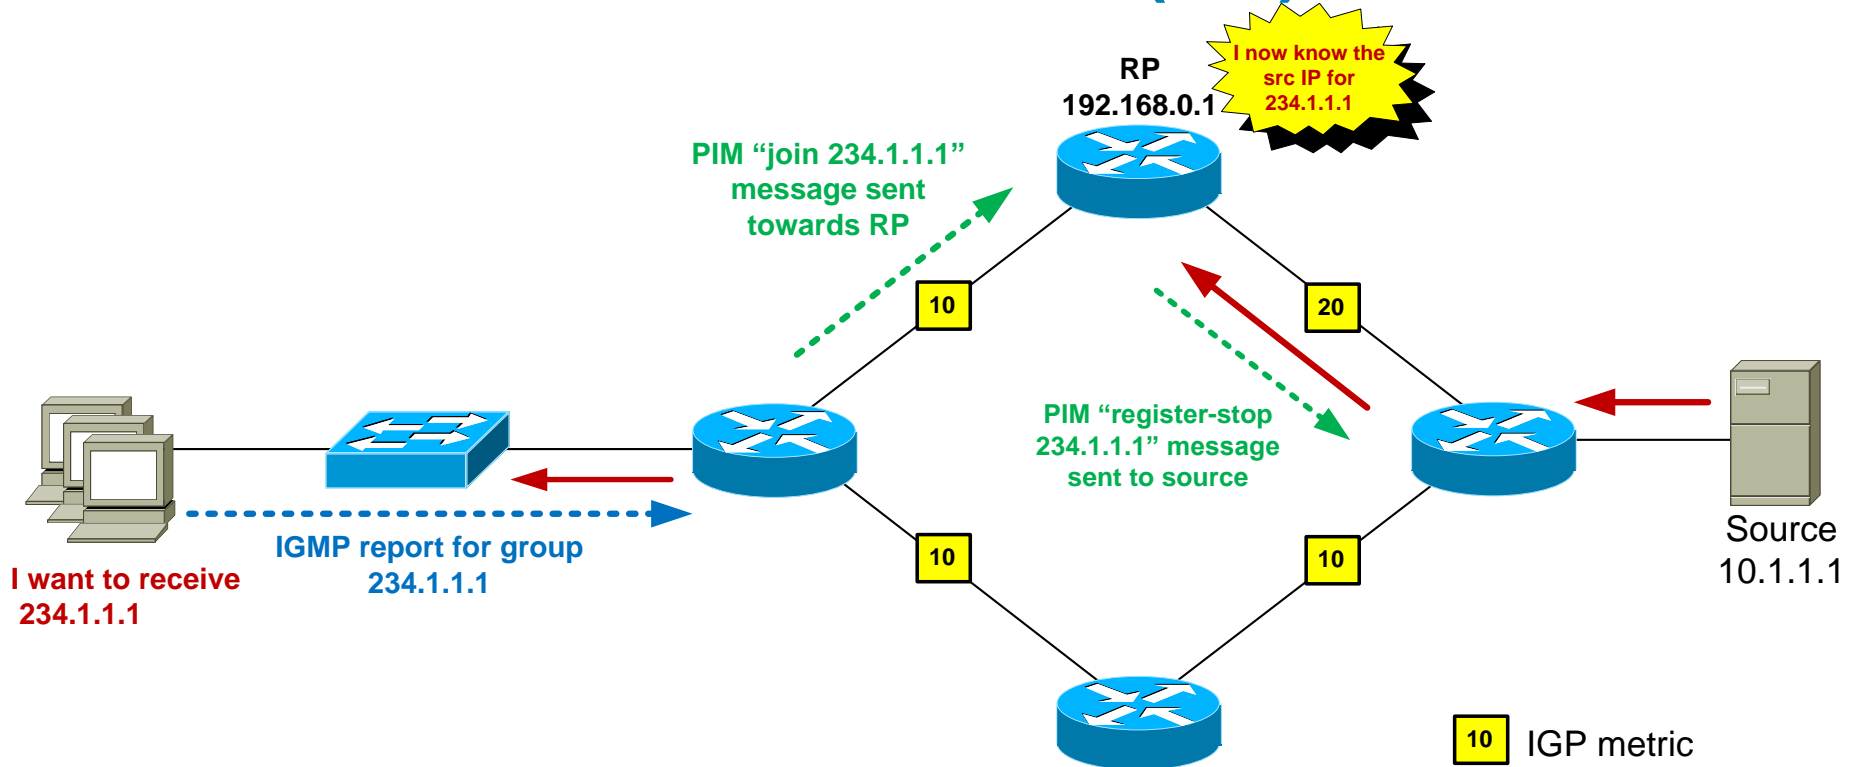


# PIM-SM: Rendezvous Point (RP)

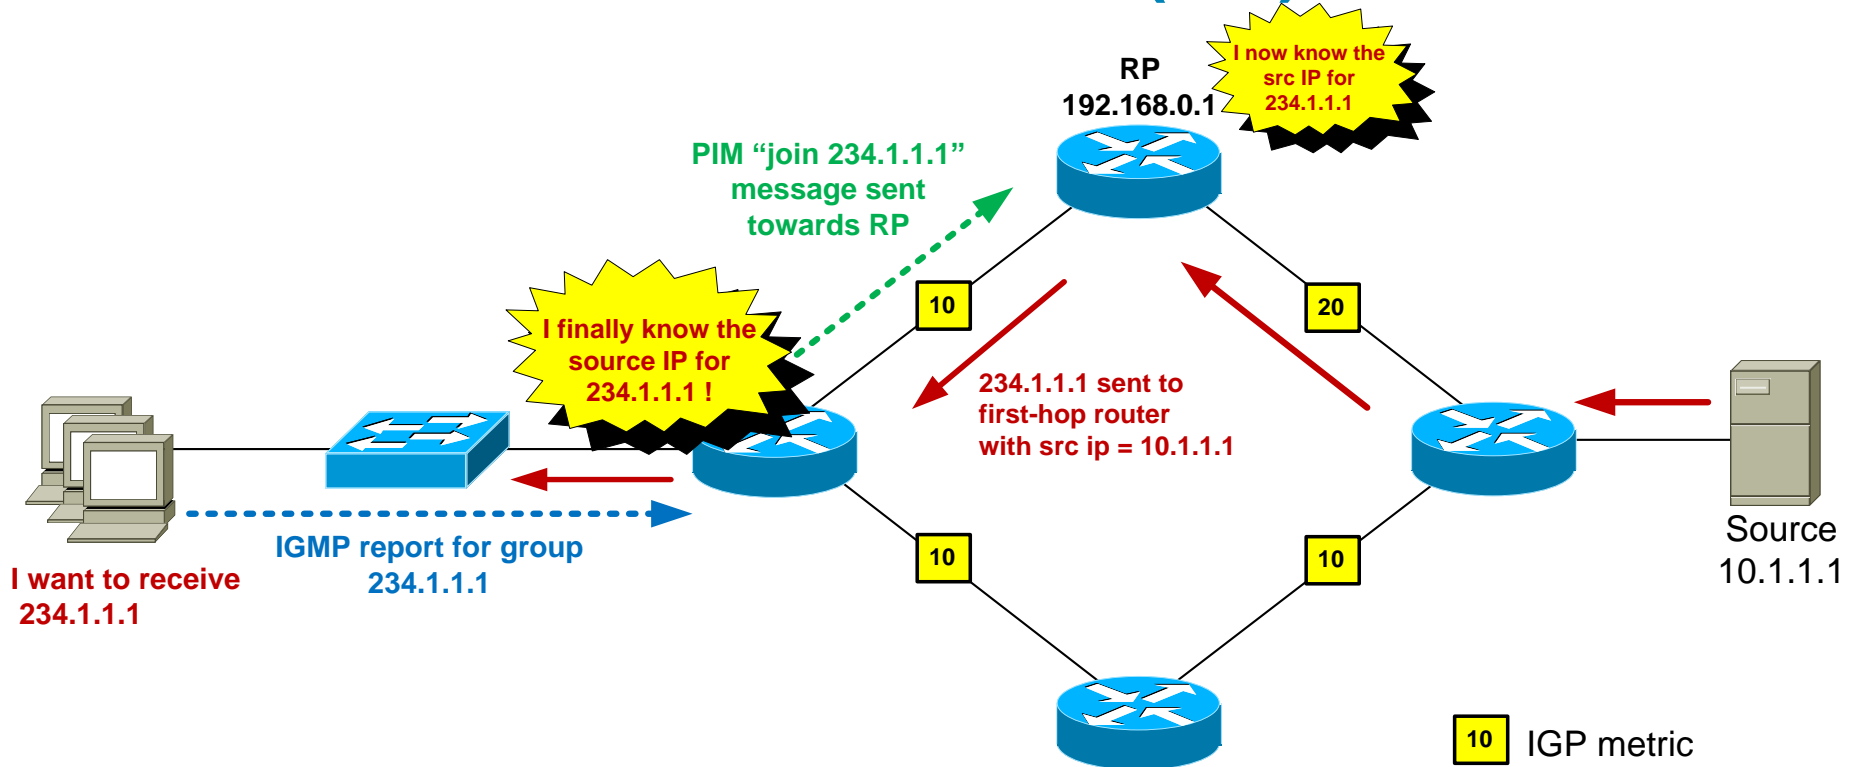





# PIM-SM: Shortest Path Tree Switchover

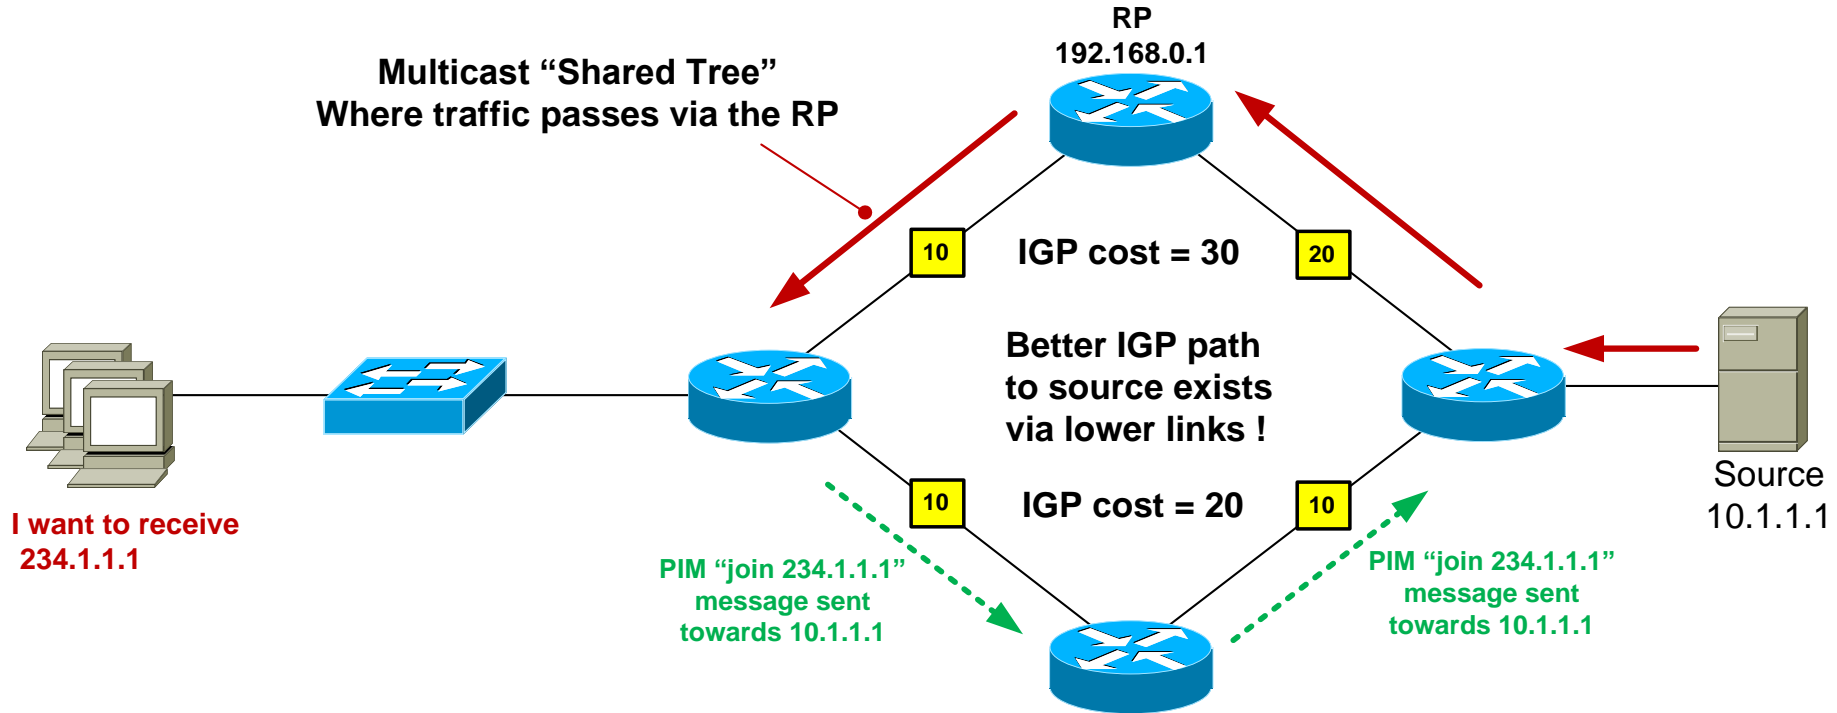

# PIM-SM: Shortest Path Tree Switchover

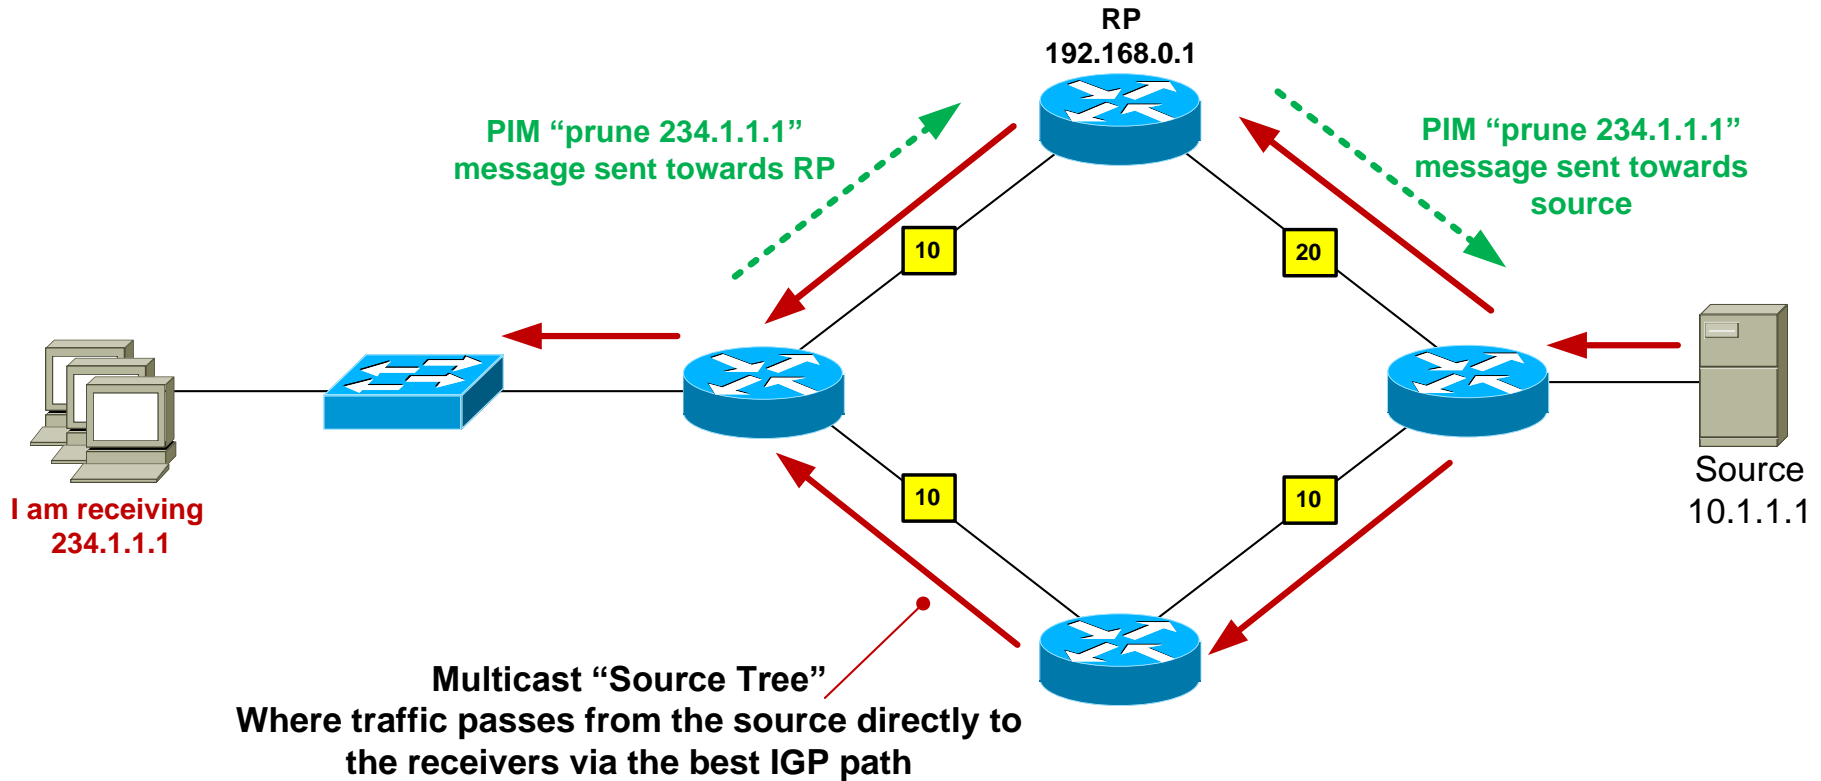

# PIM-SM: Pruning

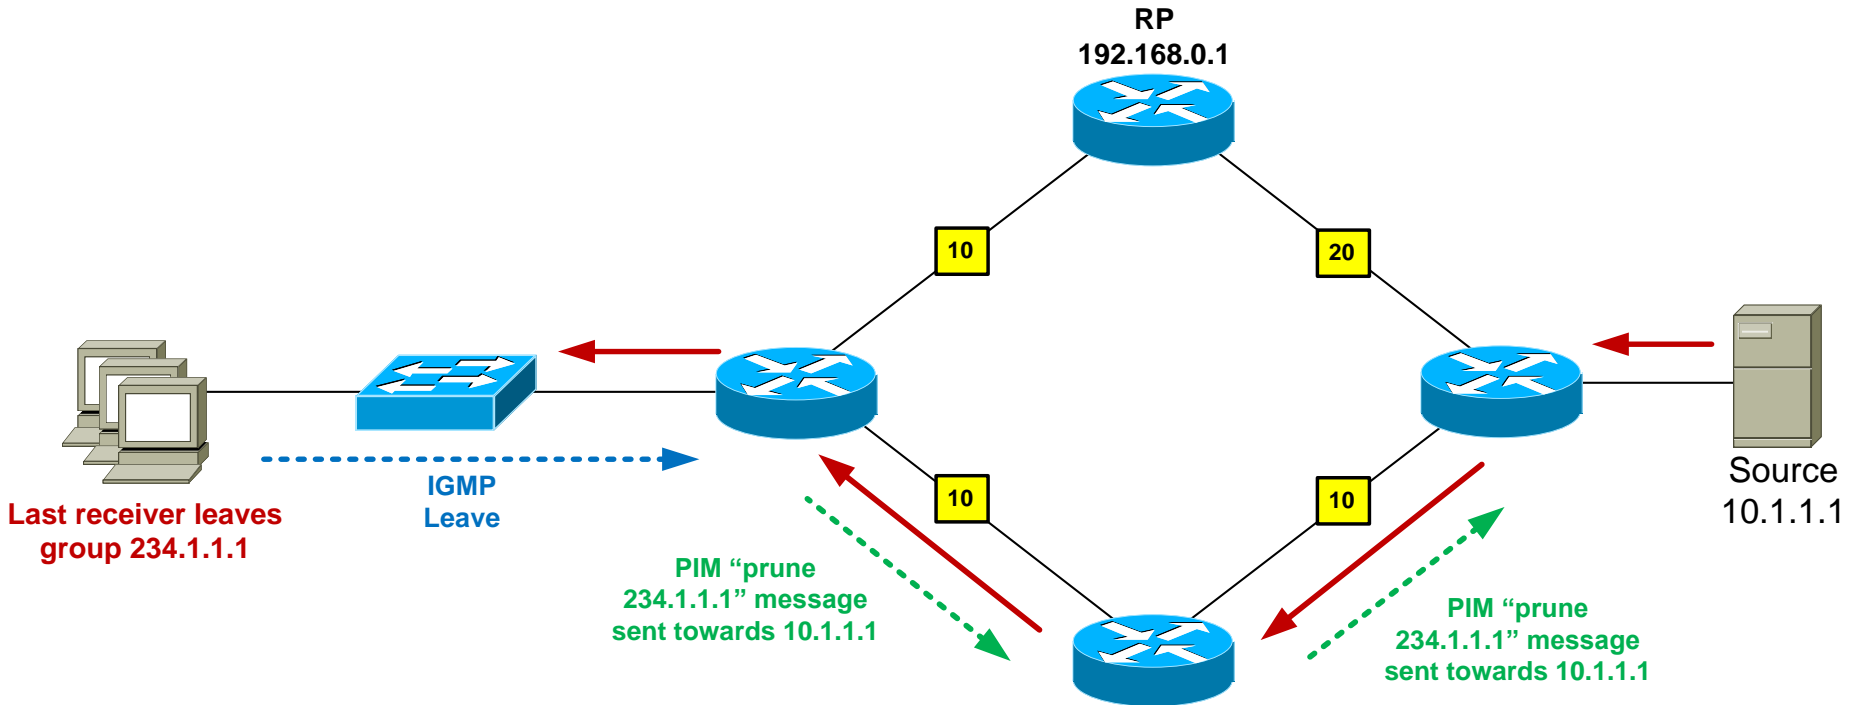

# PIM-SM: Rendezvous Point Discovery

So how does the network know where the RP is ?

- Option 1: Static RP configuration

Configure **all** routers in the network with the IP address of the RP

```
ip pim rp-address 192.168.0.1
```

- Option 2: Dynamic RP configuration

Configure the RP to tell all other routers that it is the RP


Cisco proprietary mechanism is called “Auto-RP”

IETF standard is known as Bootstrap Router (BSR) – RFC 5059

# PIM-SM RP Key Takeways

- An RP is mandatory in a PIM-SM/IGMPv2 network so that the sender's IP address for a particular group can be determined.
- MC traffic initially travels from the sender to the receiver via the RP (**Shared Tree**). Once the downstream router starts receiving the MC traffic (and knows the src IP), they build a path directly back to the sender (**Source Tree**)
- OK, but this seems like a lot of work just to find out the sender's address. What if the receiver knew this information already ?


# IGMPv3 – Joining a Group

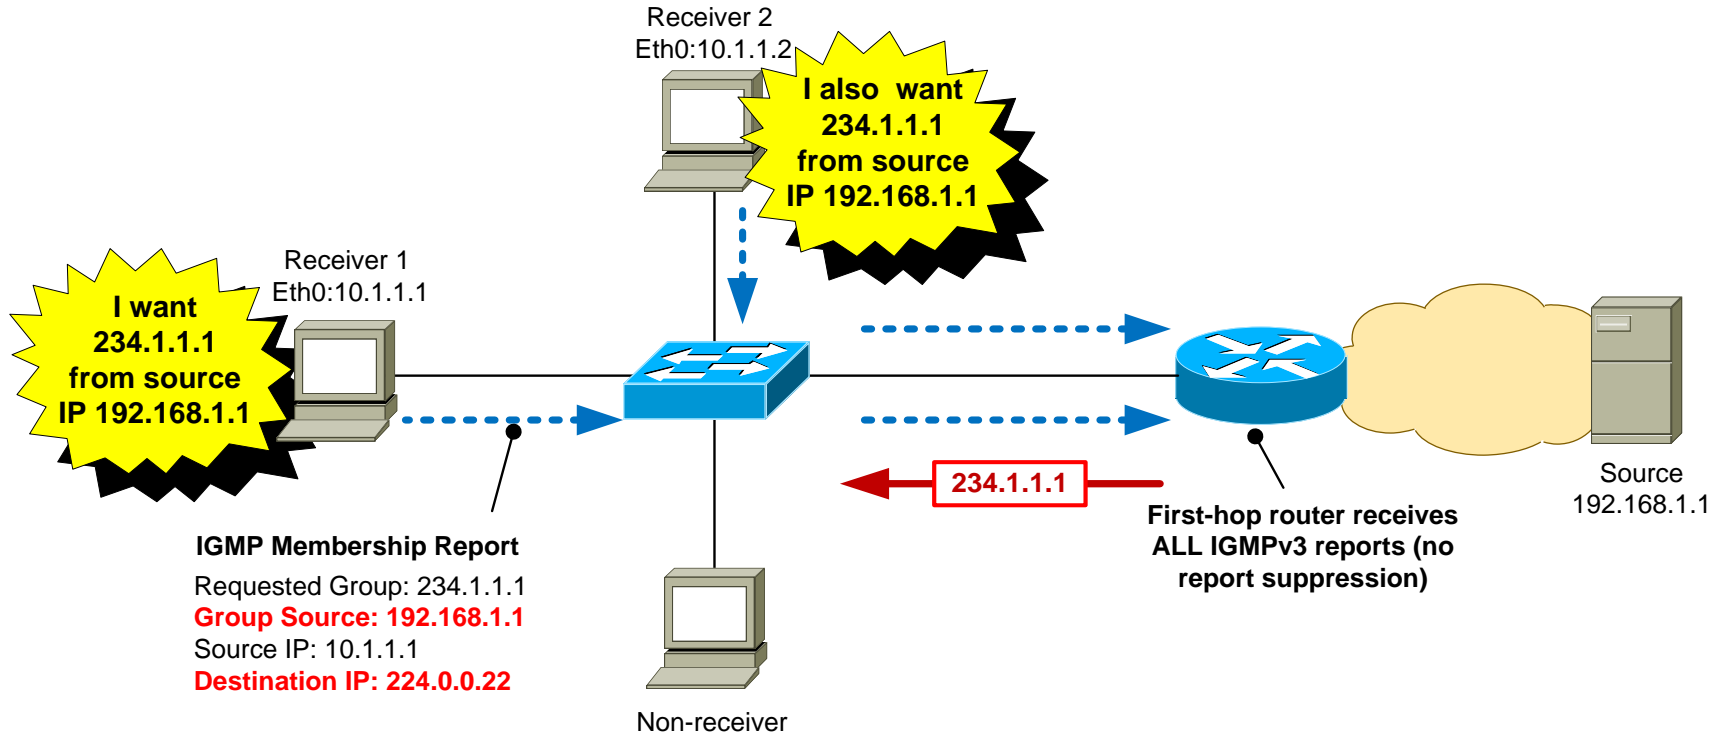


# IGMPv3 Source Discovery

Q: How does the receiver know the source address for each group ?

A: The receiver app is pre-populated with this information.

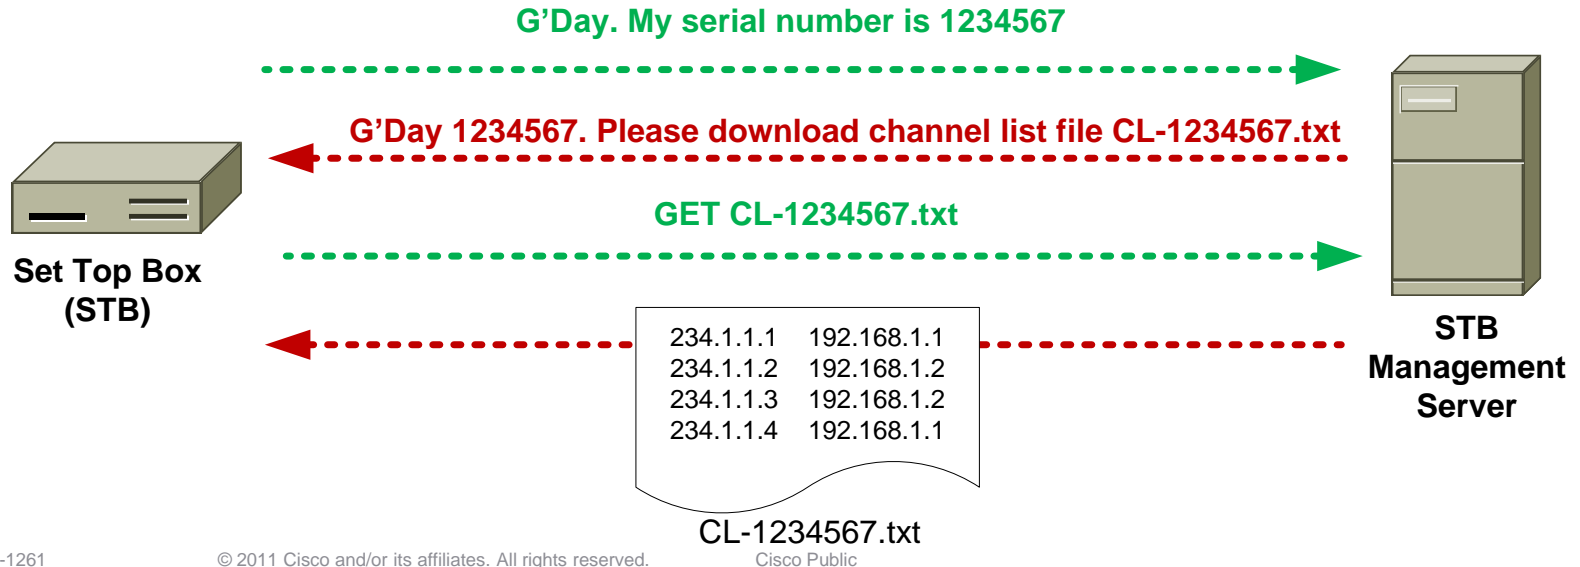

# IGMPv3 – Changing a Group

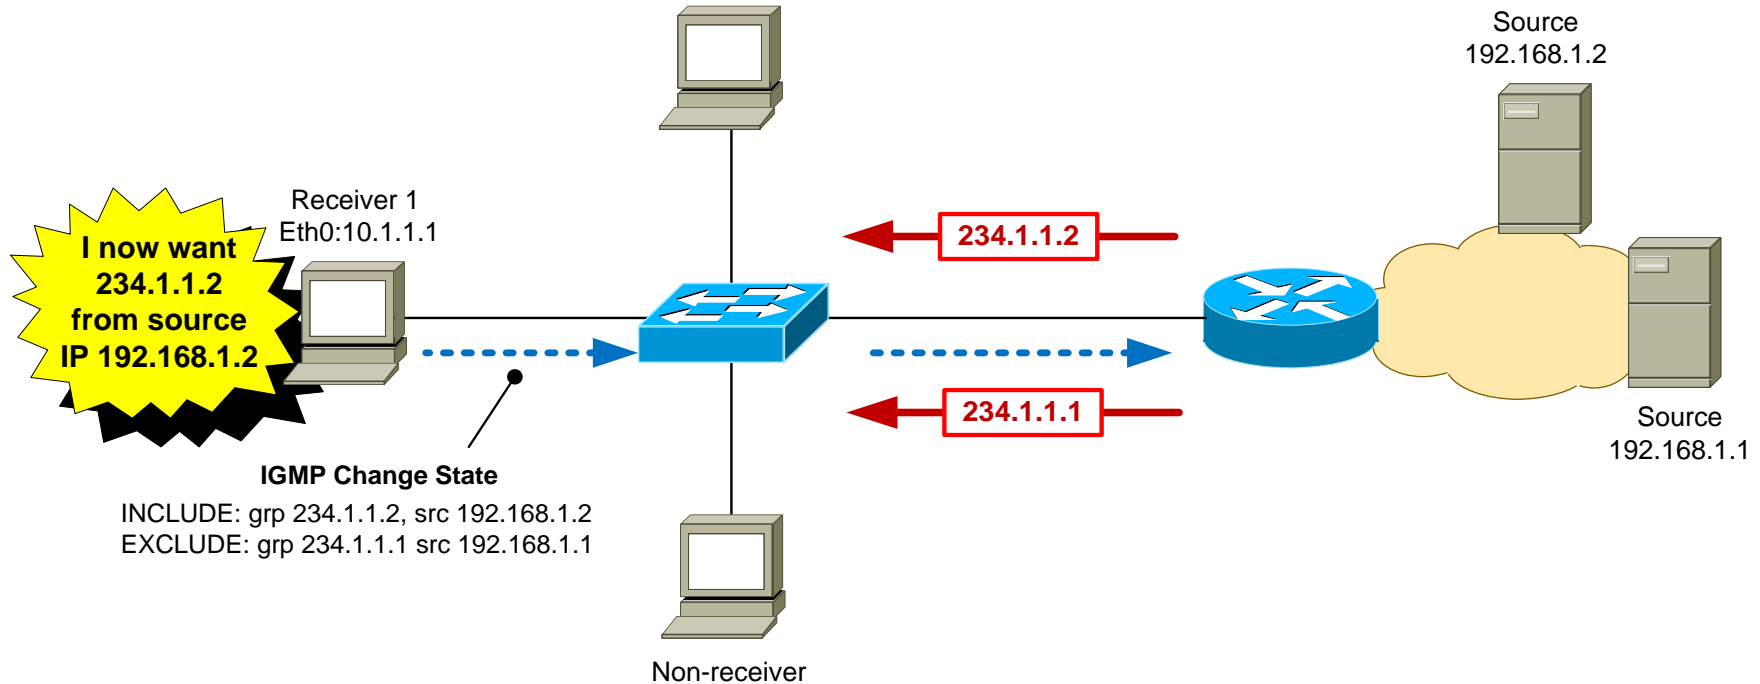




# Advantages of IGMPv3

- Hosts can join one group and leave another in the same transaction. IGMPv2 requires separate report/leave messages.
- Reduces the likelihood of multicast group being spoofed by a rogue source.
- Eliminates overlapping multicast addresses.
- First-hop router immediately knows the source address, so no need for Rendezvous Point – can use PIM-SSM.


# Router-Router Signalling: PIM-SSM

- **SSM = Source Specific Multicast**
- PIM-SSM requires the first-hop router to know the address of the MC source for each group
- PIM-SSM is usually deployed in conjunction with IGMPv3, where the receiver indicates the source address in the IGMPv3 report packet
- The first-hop router sends a PIM join **directly** towards the sender using the unicast routing table. There is no “Shared Tree” via an RP as in PIM-SM.

# PIM-SSM: Operation

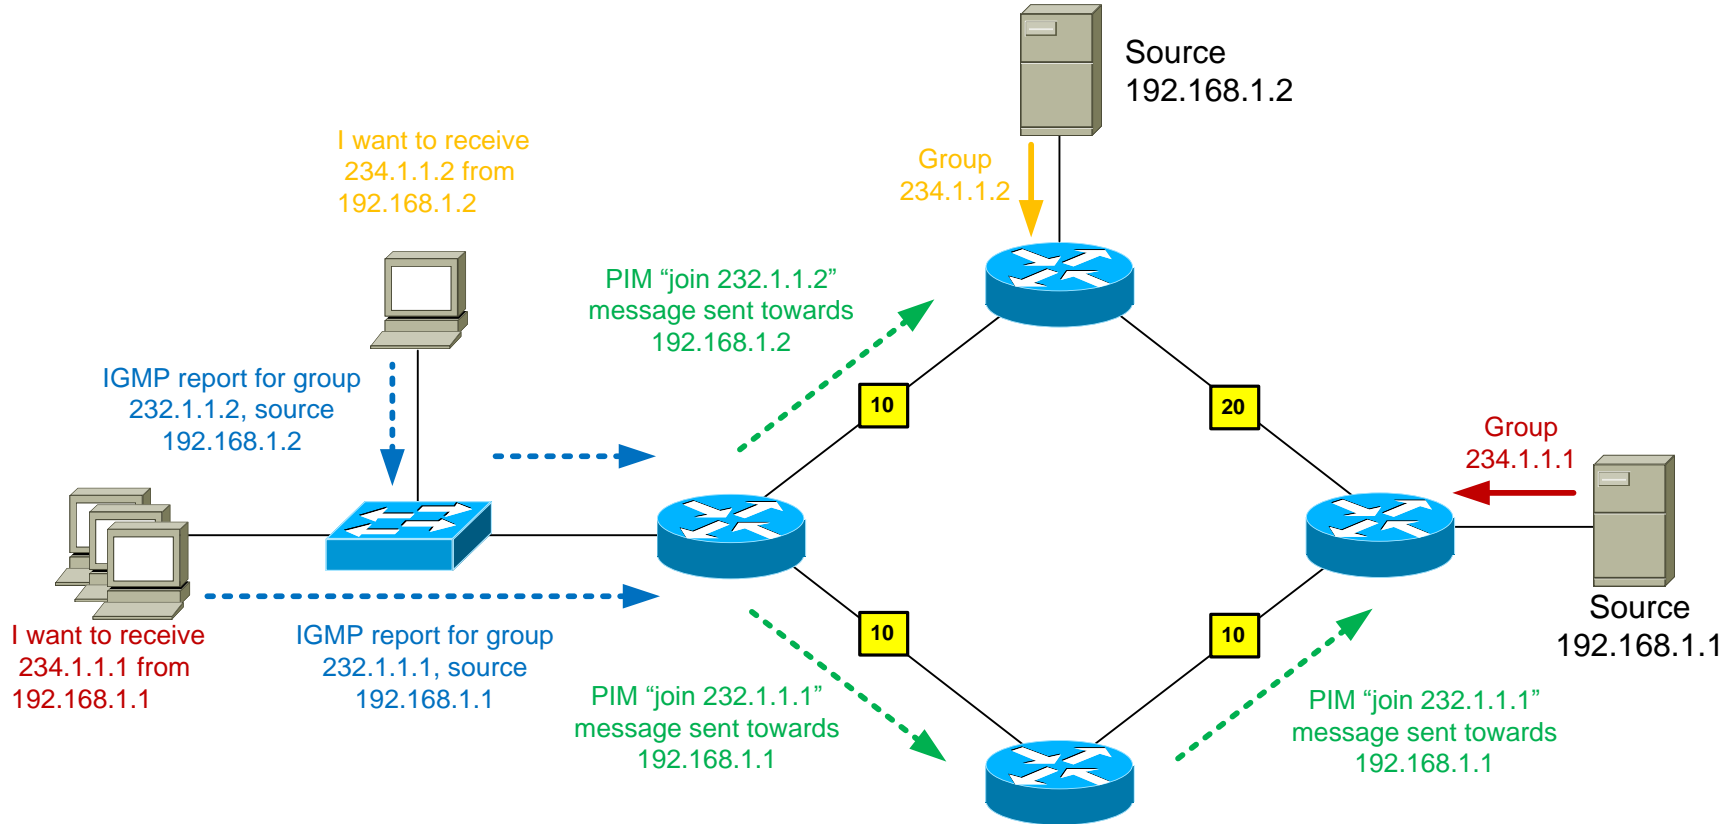

# PIM-SSM: Operation

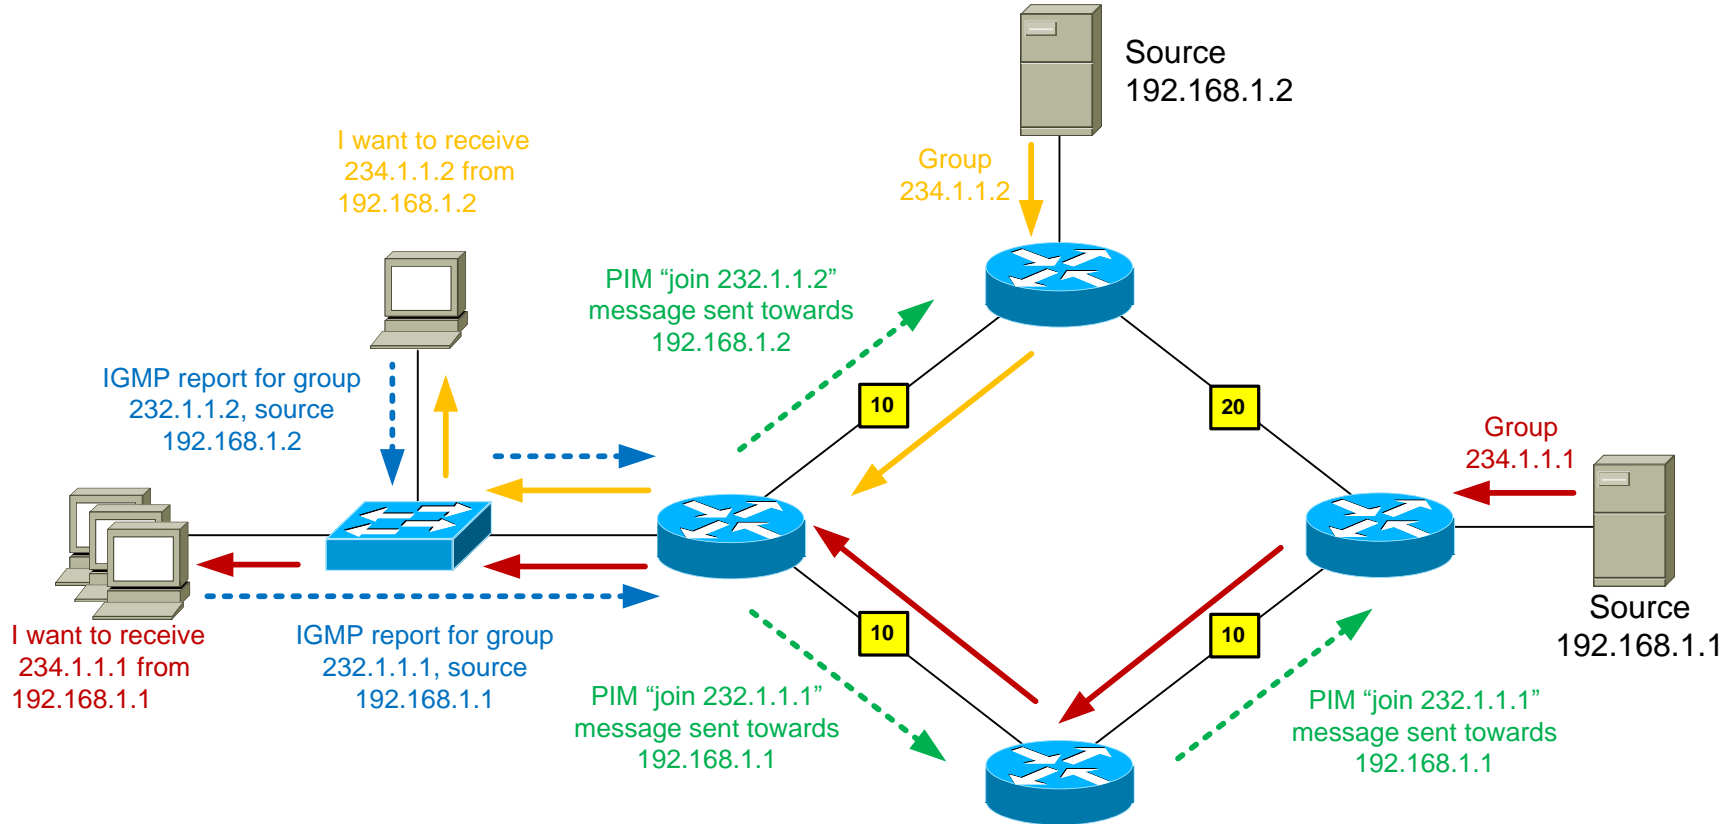

# PIM-SSM Advantages

- Easy to configure and maintain
  - No RPs
  - No Multicast Source Discovery Protocol (MSDP) between redundant RPs
- Efficient network usage
  - Traffic is not routed temporarily via the RP
  - Most direct path from source to receiver is always used
- Enhanced security
  - Spoofing of MC stream is more difficult


# PIM-SSM Considerations

- By default, IOS requires multicast groups used in PIM-SSM to be in the 232.0.0.0/8 range. To add additional ranges, use `"ip pim ssm range <acl>"`
- It is possible to use PIM-SSM for some groups and PIM-SM for other groups simultaneously – thought definitely not recommended !
- Using PIM-SSM has some implications for providing source redundancy. The network assumes that if a source is in the routing table, then it is actually sending multicast traffic.

# PIM-SSM Mapping


- The ideal SSM architecture uses IGMPv3 for host-router signalling and PIM-SSM for router-router signalling
- But...IGMPv3 host support is patchy, whereas IGMPv2 is ubiquitous
- Q: Is there a way to use PIM-SSM in the network when I have hosts that only support IGMPv2 ?  
A: Yes – its called PIM-SSM mapping
- PIM-SSM mapping can be used as an interim measure until IGMPv3 is supported on all hosts

# PIM-SSM Static Mapping

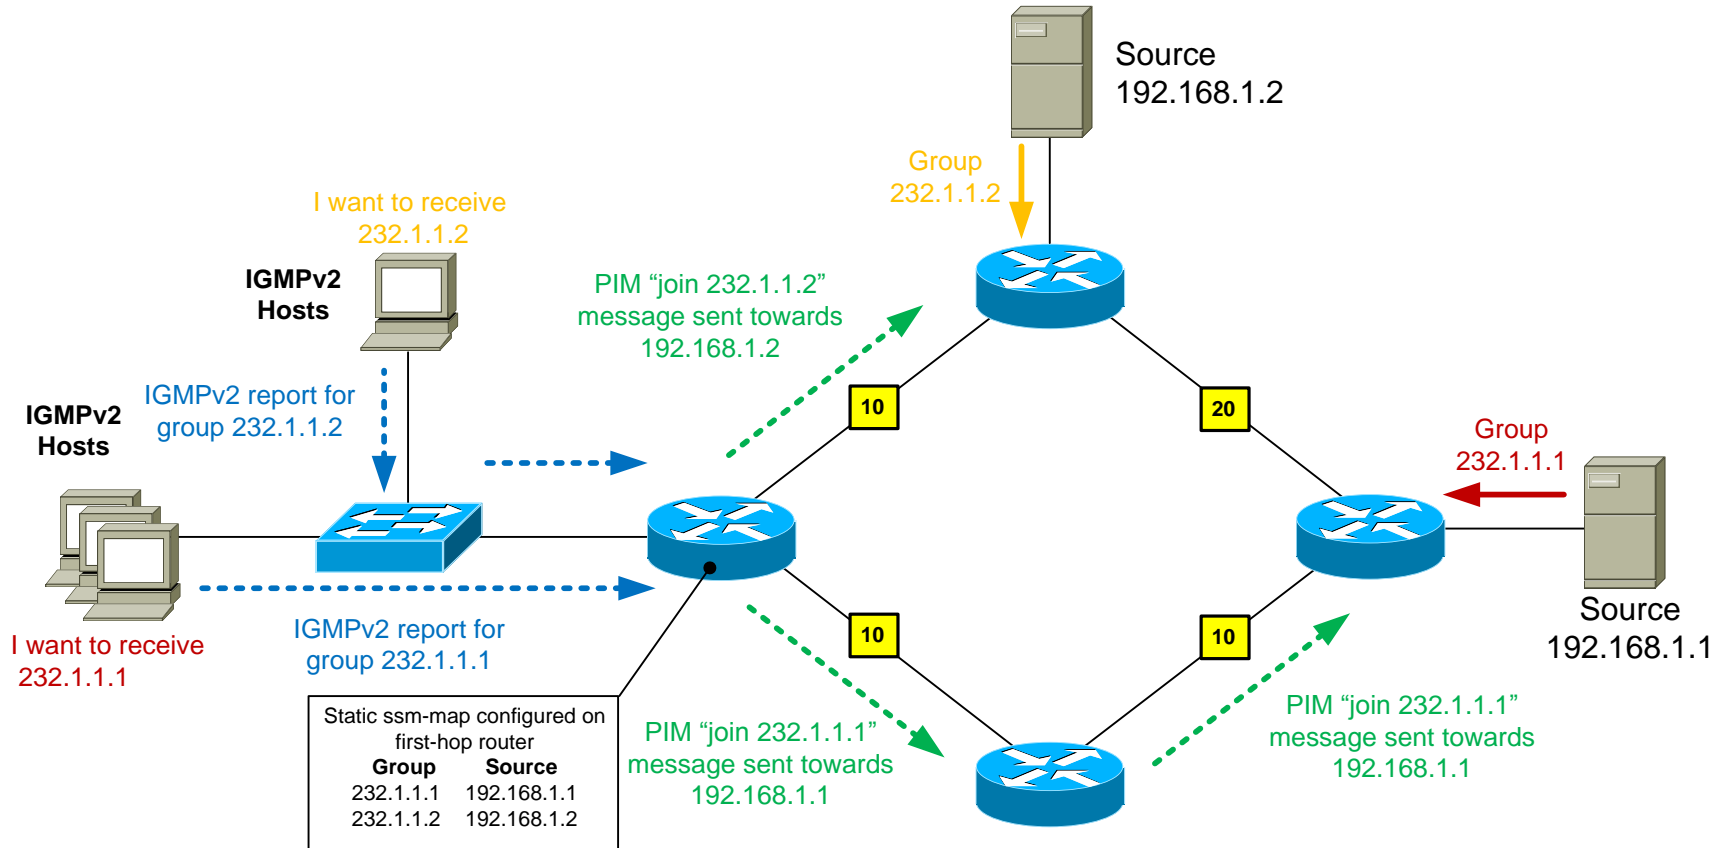





# PIM-SSM Static Mapping

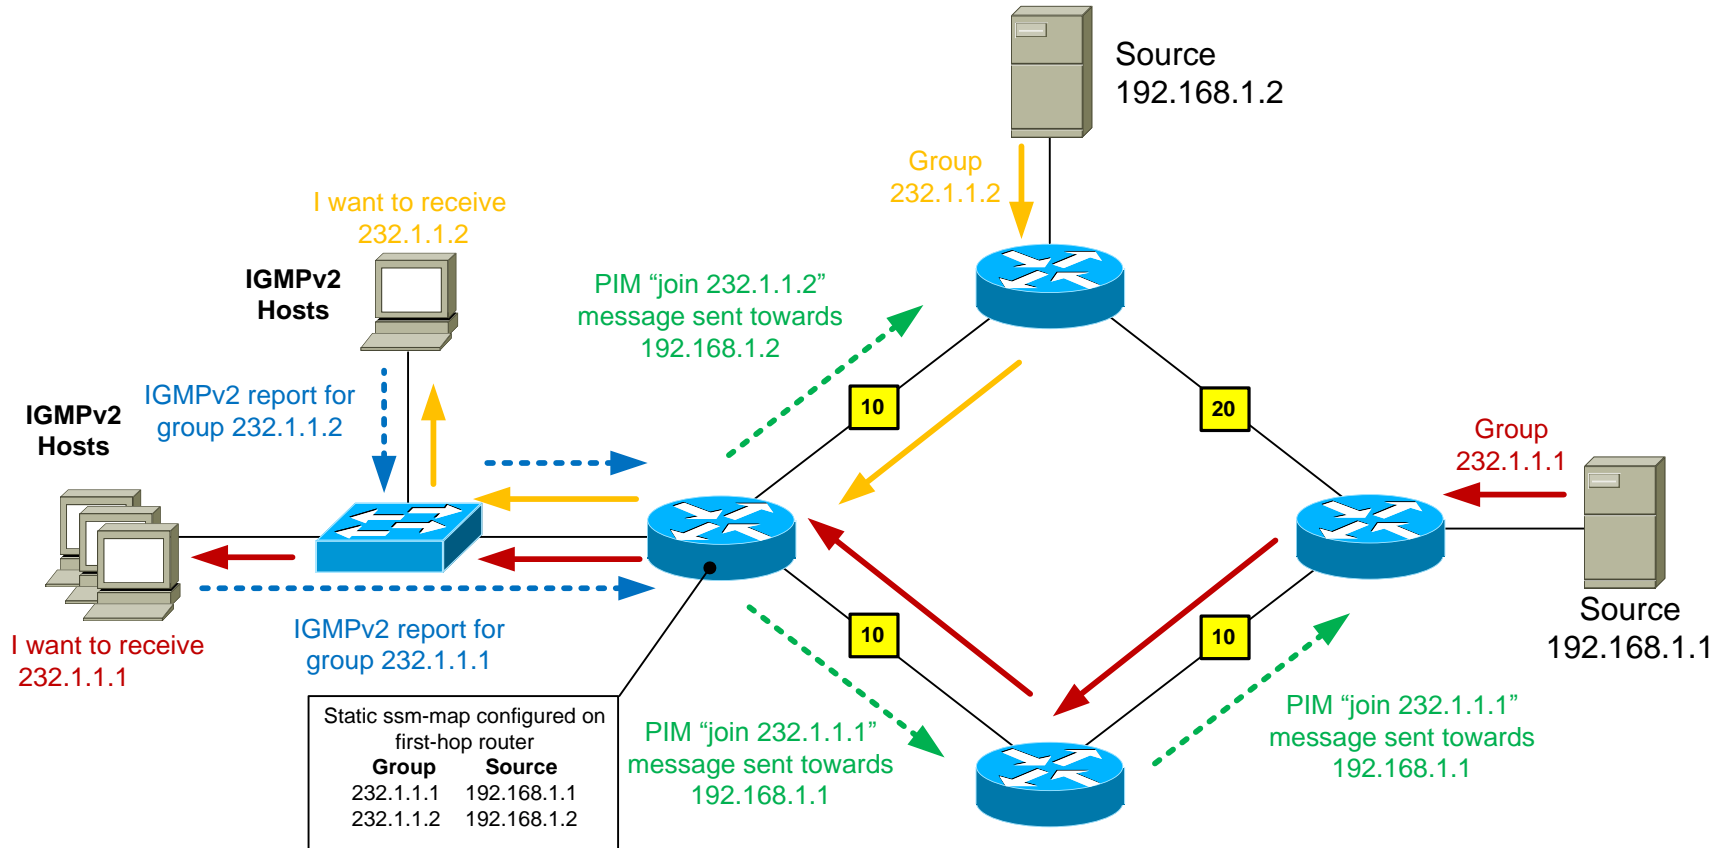


# PIM-SSM Dynamic (DNS) Mapping

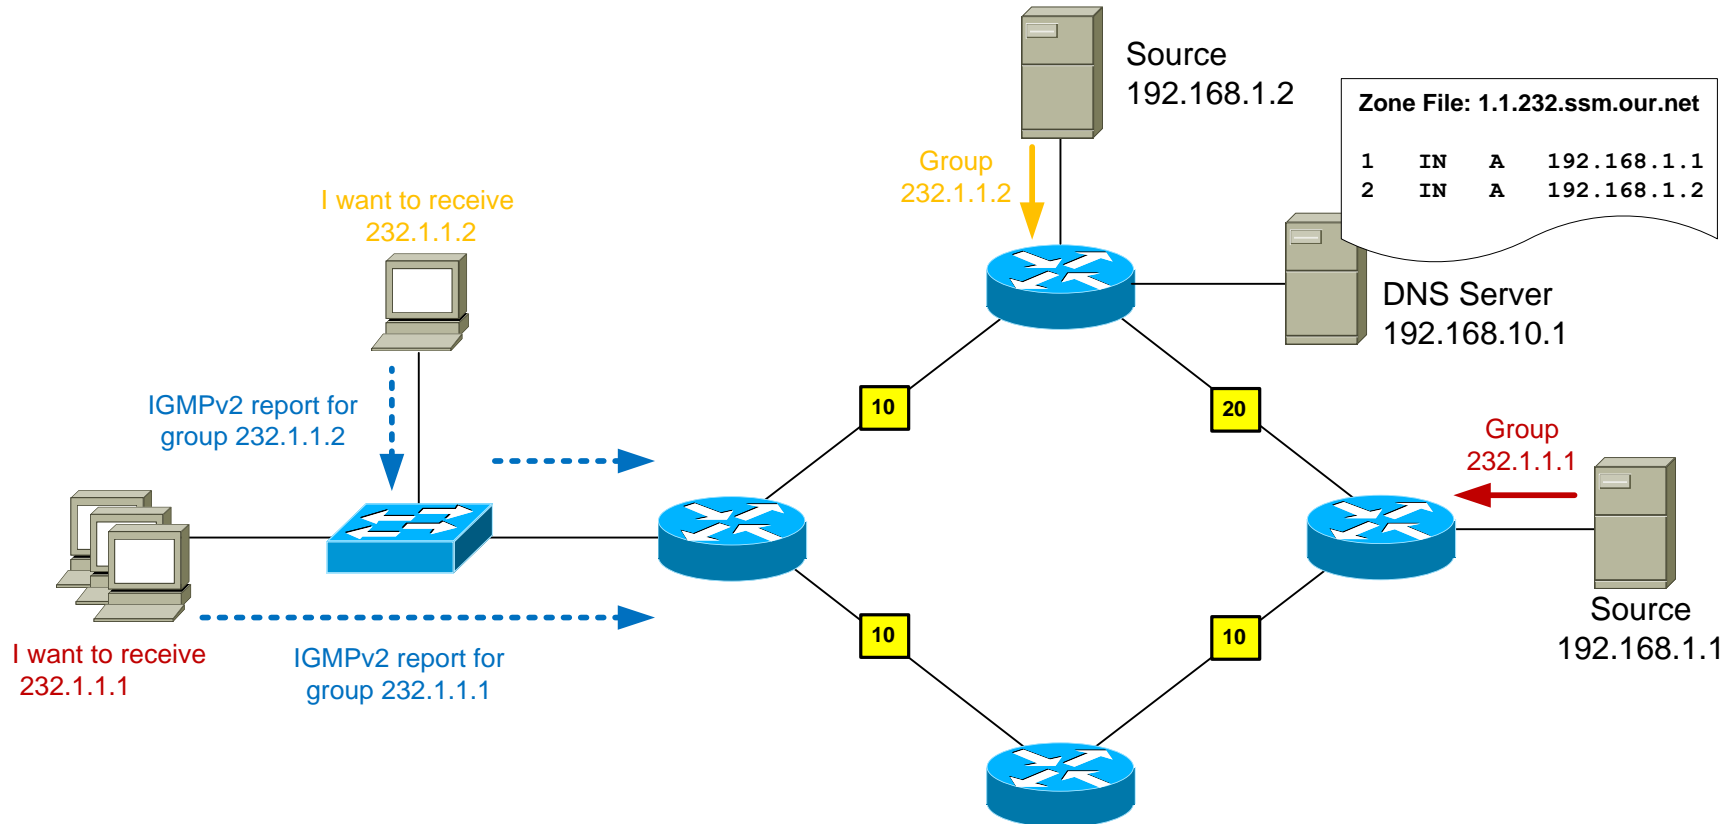


# PIM-SSM Dynamic (DNS) Mapping

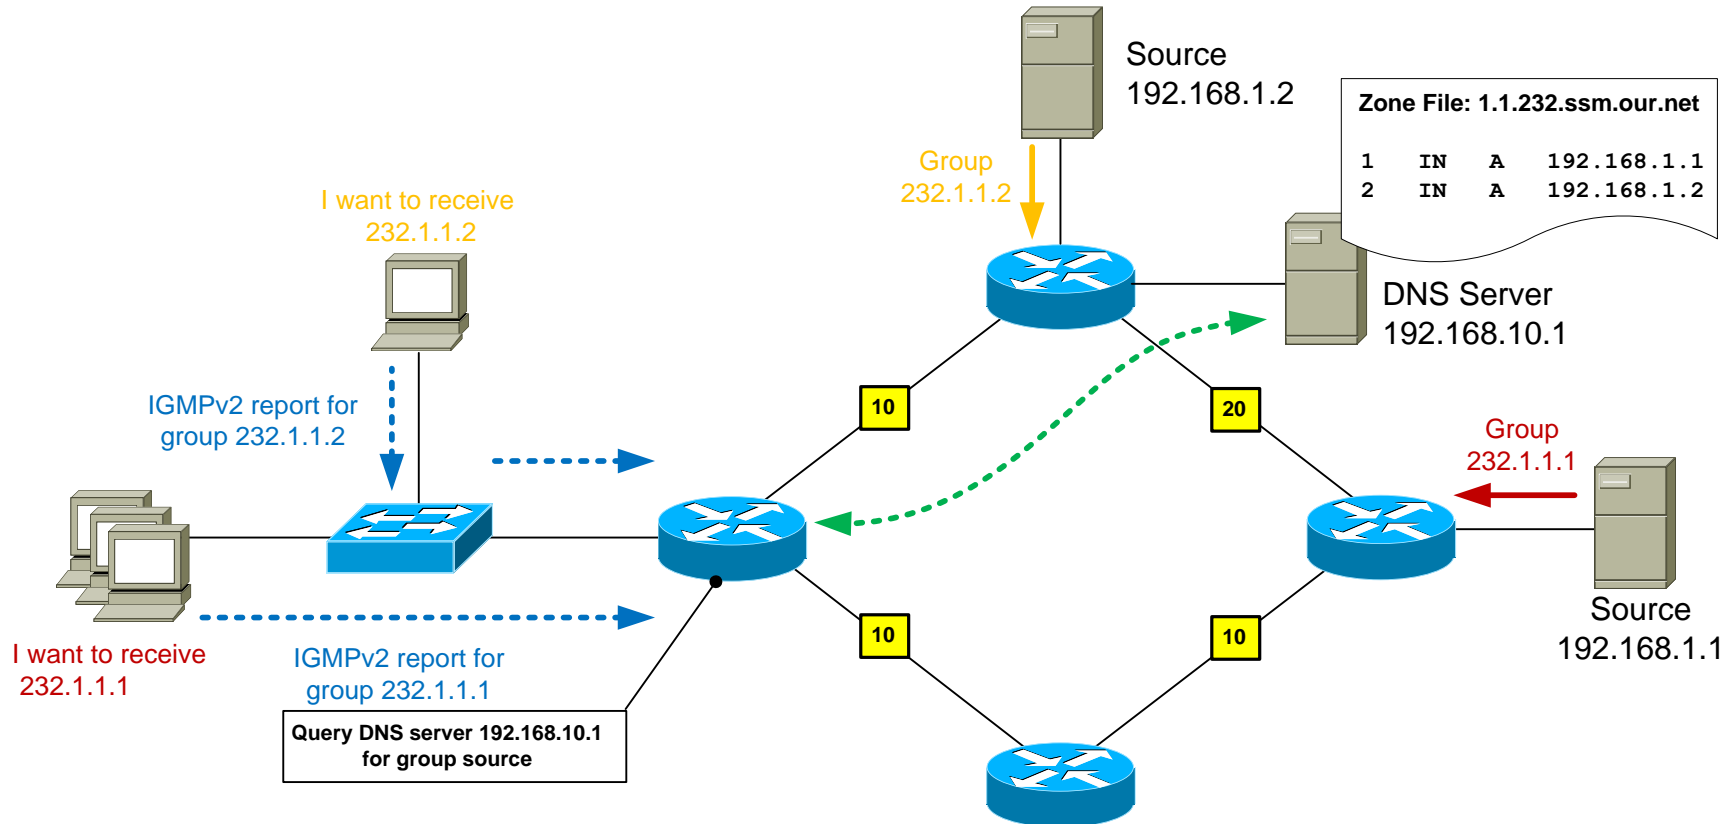

# PIM-SSM Dynamic (DNS) Mapping

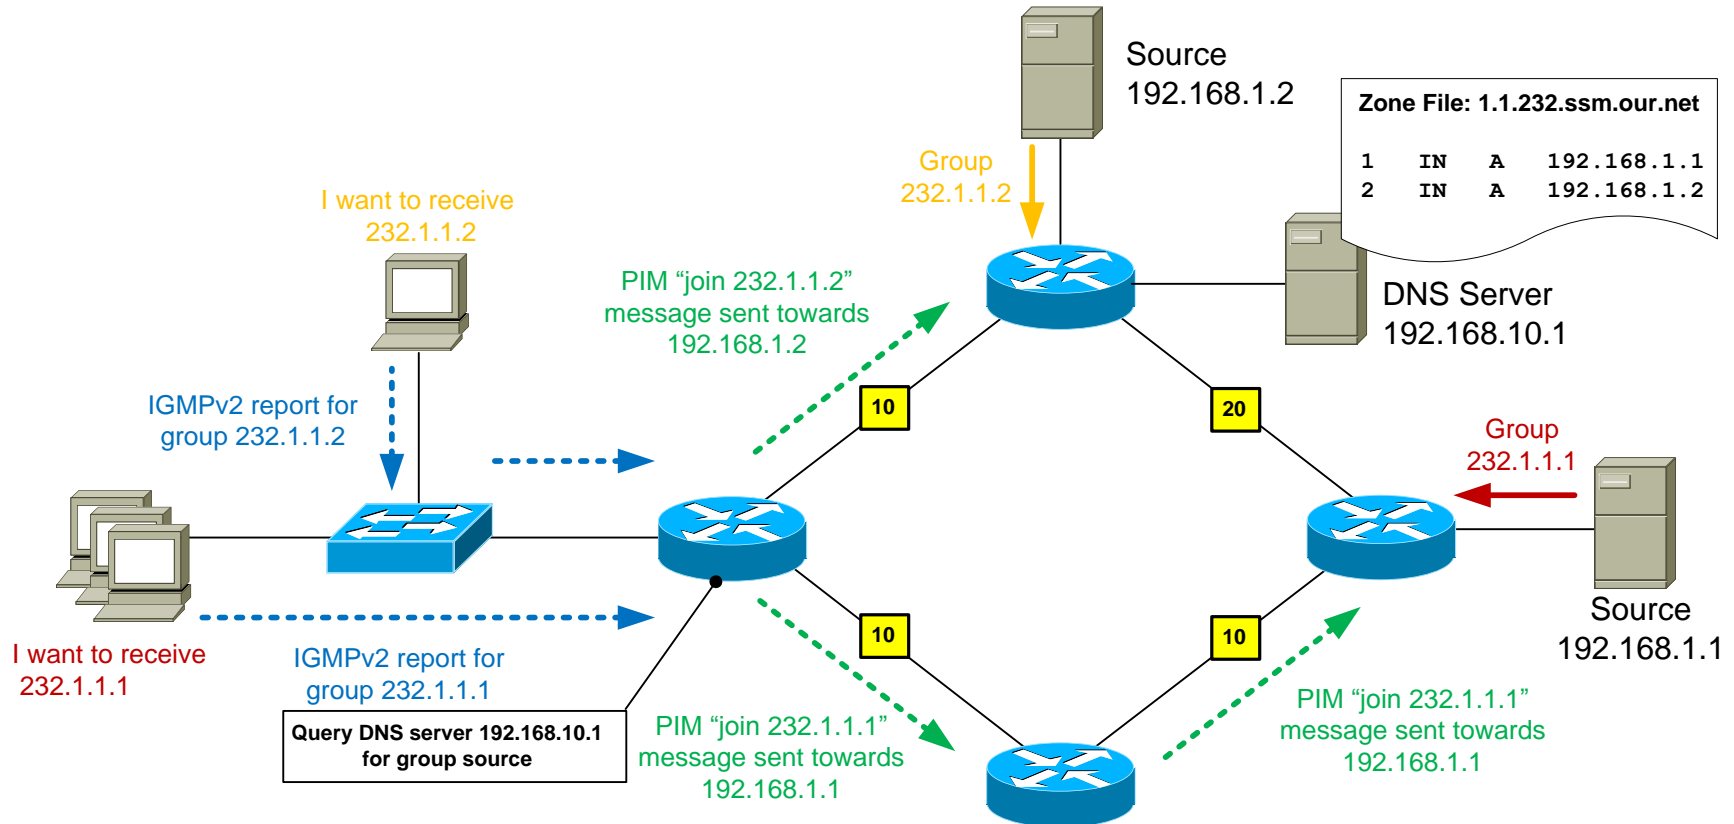

# PIM-SSM Dynamic (DNS) Mapping

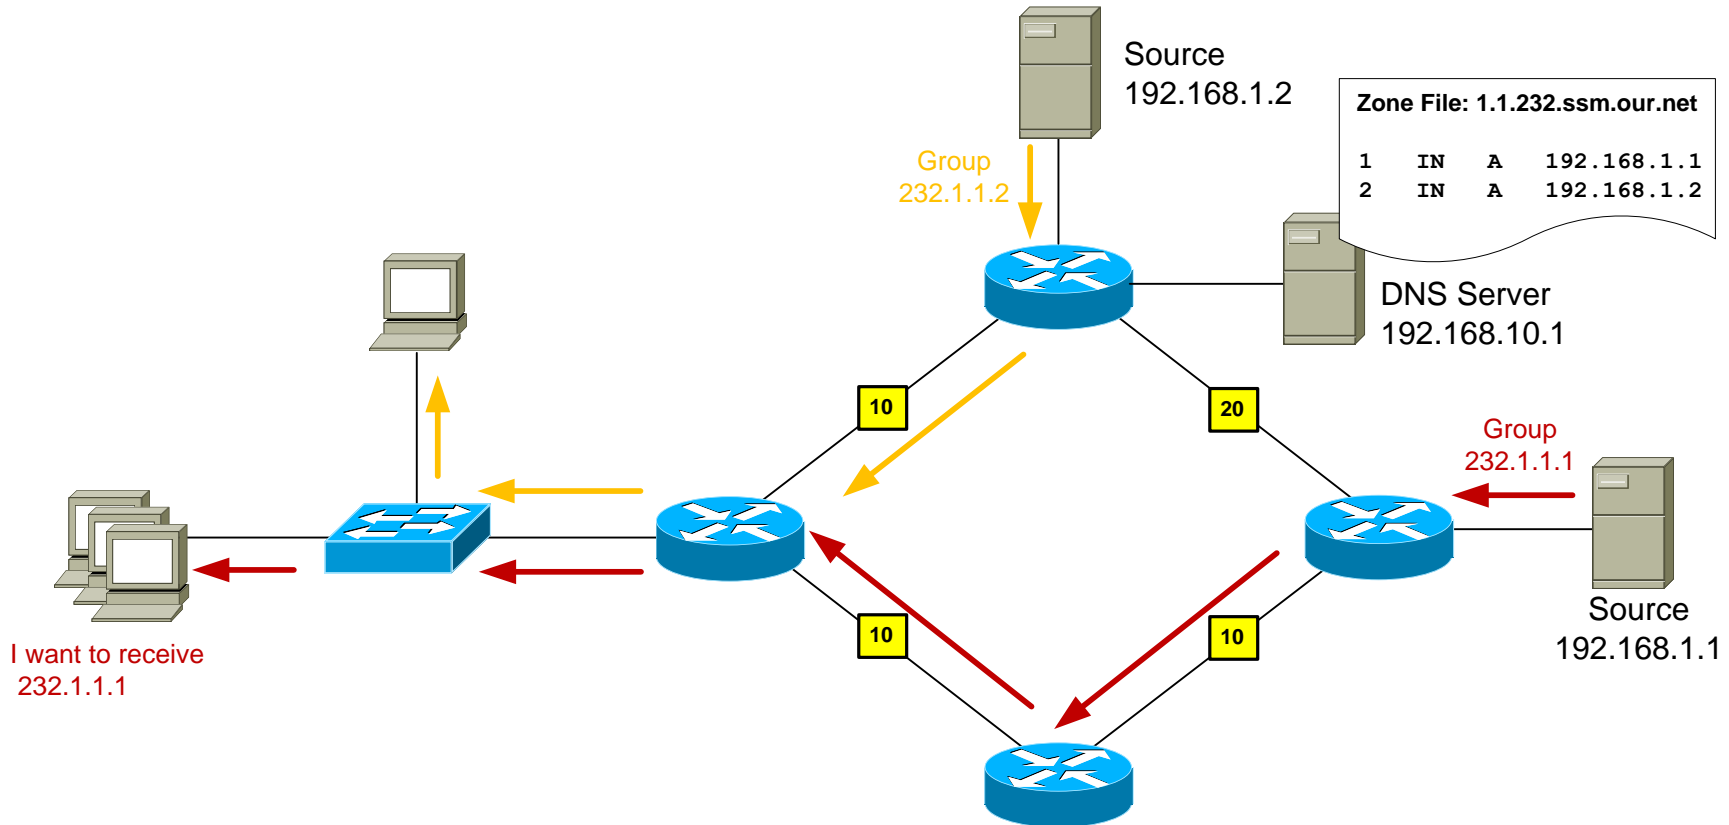


# Multicast Design

# Case Study - Background


- Company has 1 head office with 200 staff, 1 branch office with 10 staff and occasional home users
- Management wants to deploy an in-house, always-on video channel that staff may watch at any time for the latest product releases and Company news
- Important events will require all users to watch the channel at the same time
- The video bitrate is 2 Mbps

# Case Study – Network Topology

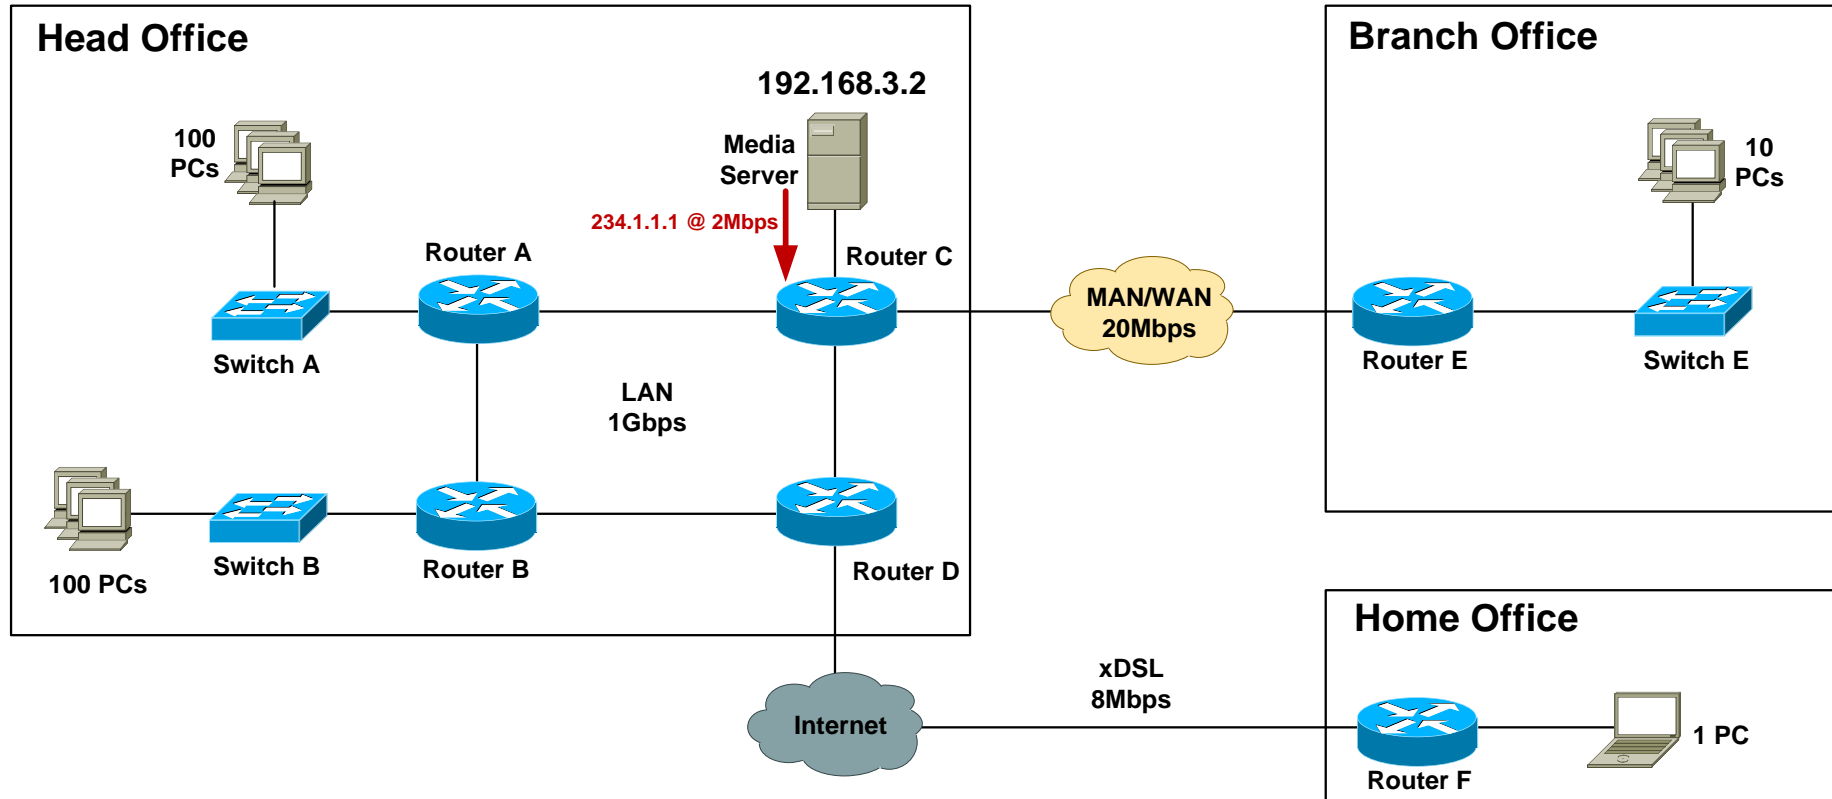




# Case Study – Unicast Bandwidth Scenario

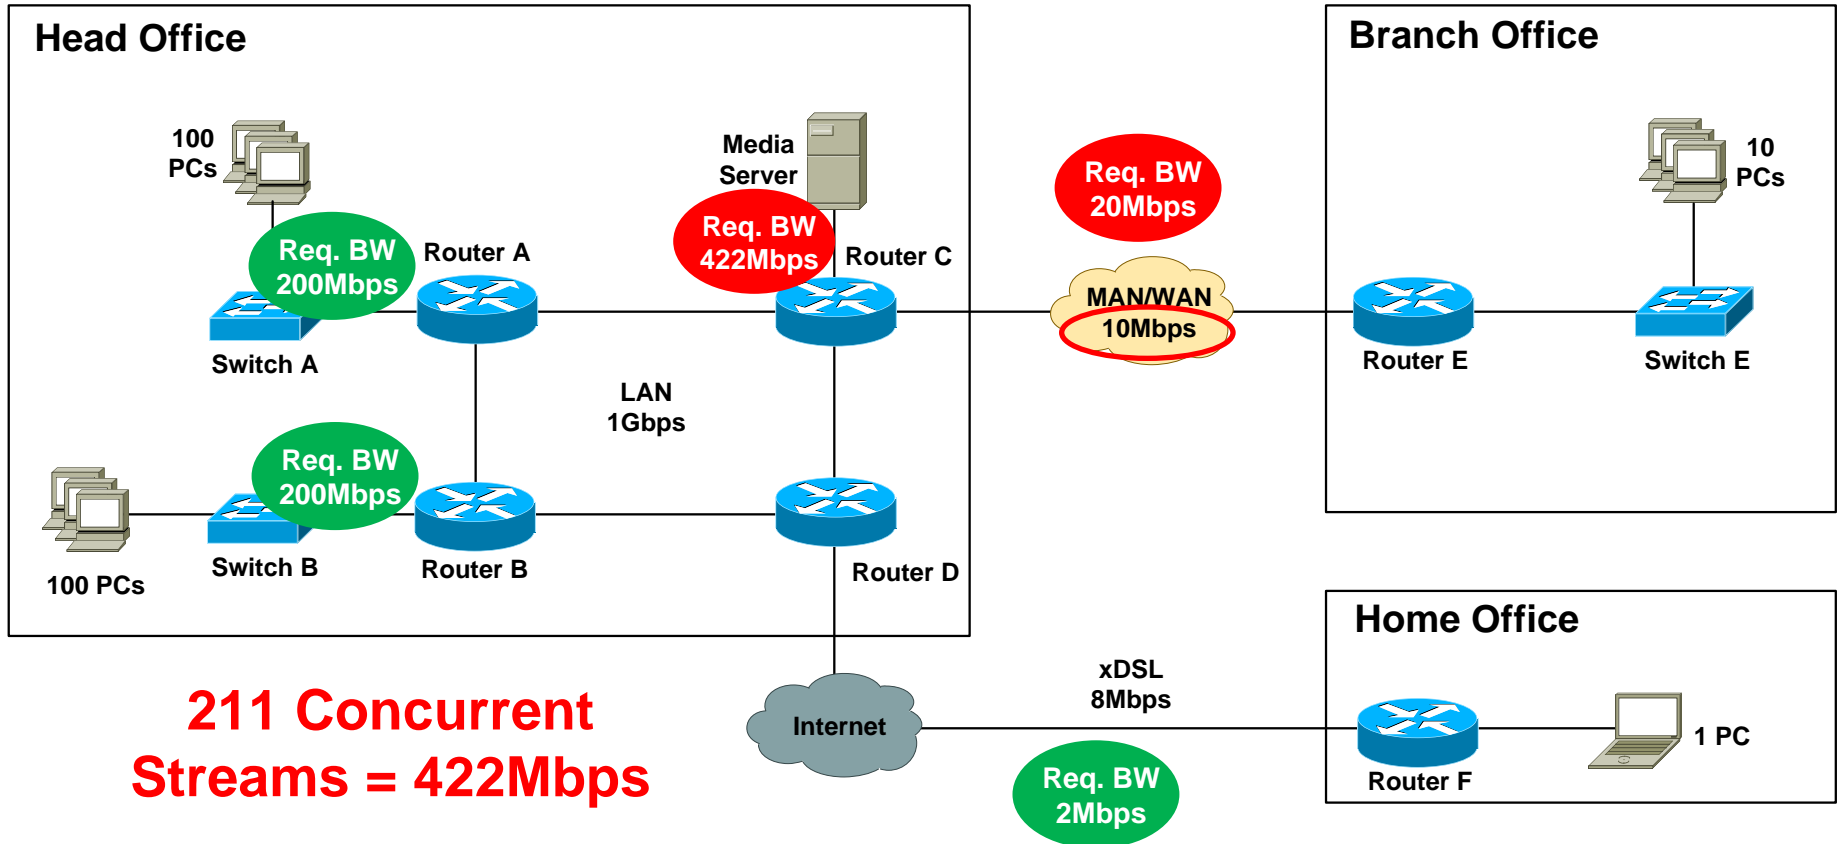

# Case Study – Multicast Bandwidth Scenario

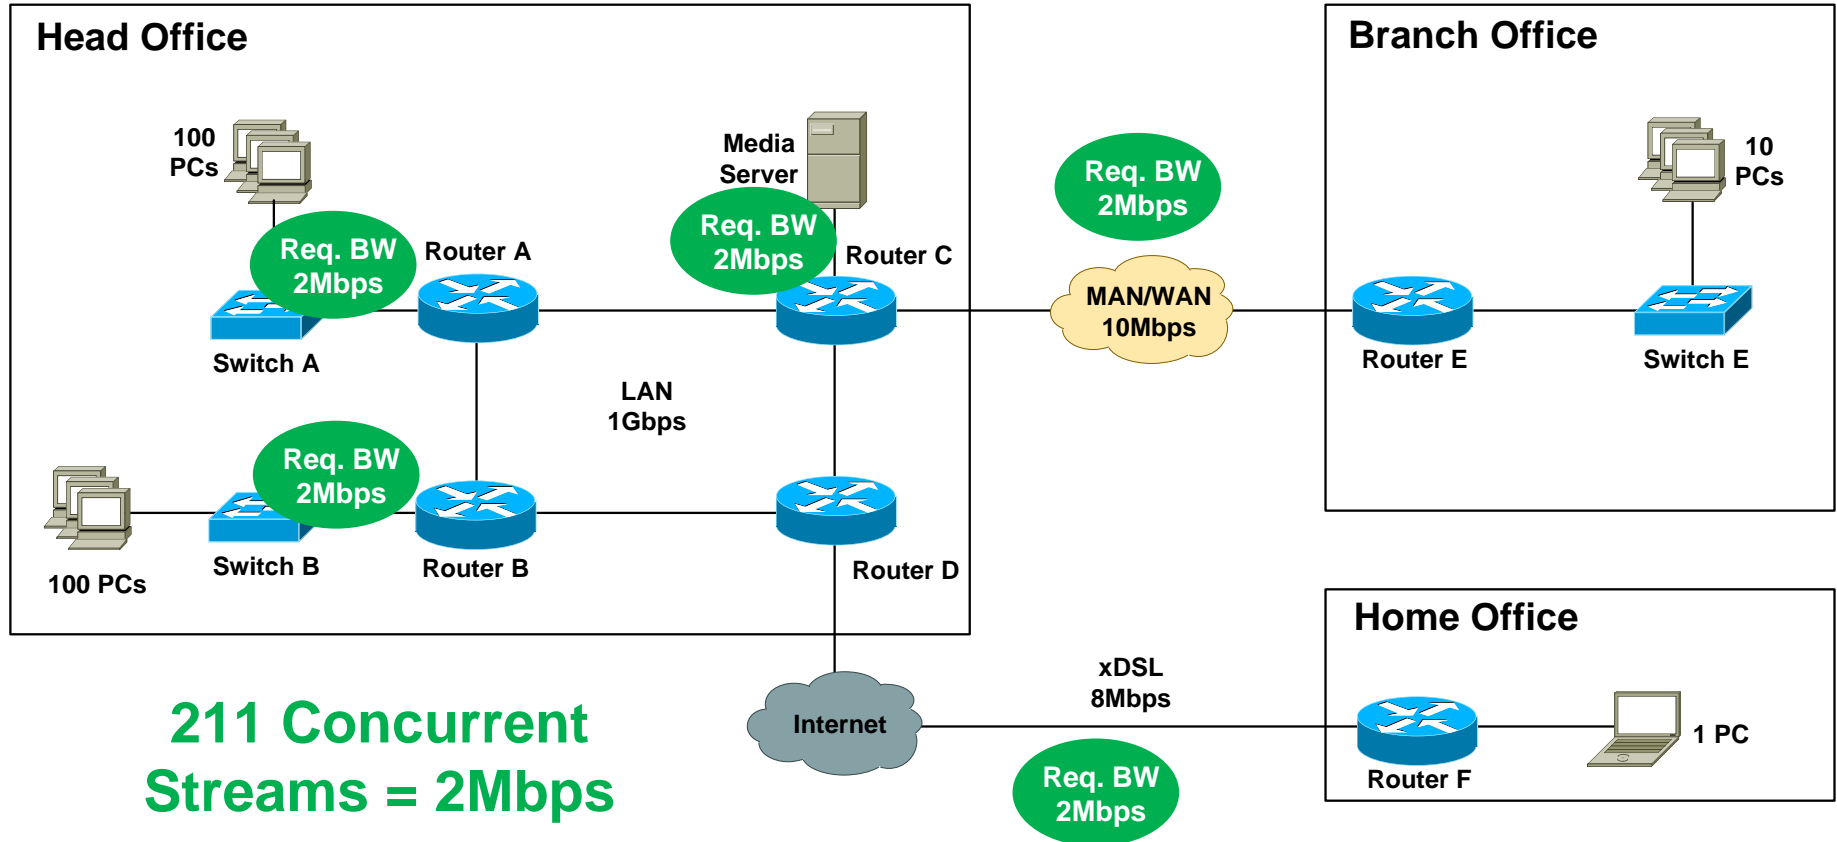

# Case Study – Network Support for MC

- Cisco IOS provides broad platform support for PIM (all variants) and IGMPv1/2/3
- Check with WAN provider for MC support
  - Dark fibre or CPL, EoSDH, EoMPLS, Frame relay, ATM, SDH/SONET, leased-line services – usually no issues
  - Managed ethernet, “QinQ”, L3VPN, VPLS – **check with provider**. SP network generally needs to be configured for MC support
- **No native support for multicast across the Internet**
- **No native IPSec support for multicast**

# Case Study – Design Options

- Option 1: Any Source Multicast (ASM) design
  - Hosts run IGMPv2
  - Network runs PIM-SM with RP
- Option 2: Source Specific Multicast (SSM) design
  - Hosts run IGMPv3
  - Network runs PIM-SSM
- Option 3: SSM design with IGMP mapping
  - Hosts run IGMPv2
  - Network runs PIM-SSM with source address mapping

# Case Study – ASM

## Step 1: Configure IGMP snooping on access switches

- IGMP snooping enabled by default on Cisco devices
- Configure  
“ip igmp snooping vlan <x> immediate-leave”  
for vlans with directly  
attached hosts only.

```
Switch_A#sh ip igmp snooping vlan 10
Vlan 10:
-----
IGMP snooping                      : Enabled
IGMPv2 immediate leave             : Enabled
Multicast router learning mode     : pim-dvmrp
CGMP interoperability mode         : IGMP_ONLY
Robustness variable                : 2
Last member query count            : 2
Last member query interval         : 1000

Switch_A#
```

# Case Study – ASM

## Step 2: Configure all routers for multicast

- Globally enable multicast routing:


```
Router_A(config)#ip multicast-routing
Router_A(config)#do show ip multicast global
Multicast Routing: enabled
Multicast Multipath: disabled
Multicast Route limit: No limit
Multicast Triggered RPF check: enabled
Multicast Fallback group mode: Sparse
Router_A(config)#
```

- Configure PIM on all internal router interfaces:

```
Router_A(config-if)#int fast 0/3
Router_A(config-if)#ip pim sparse-mode
Router_A(config-if)#
```

# Case Study – ASM

## Step 3: Configure all internal links for PIM-SM, IGMPv2

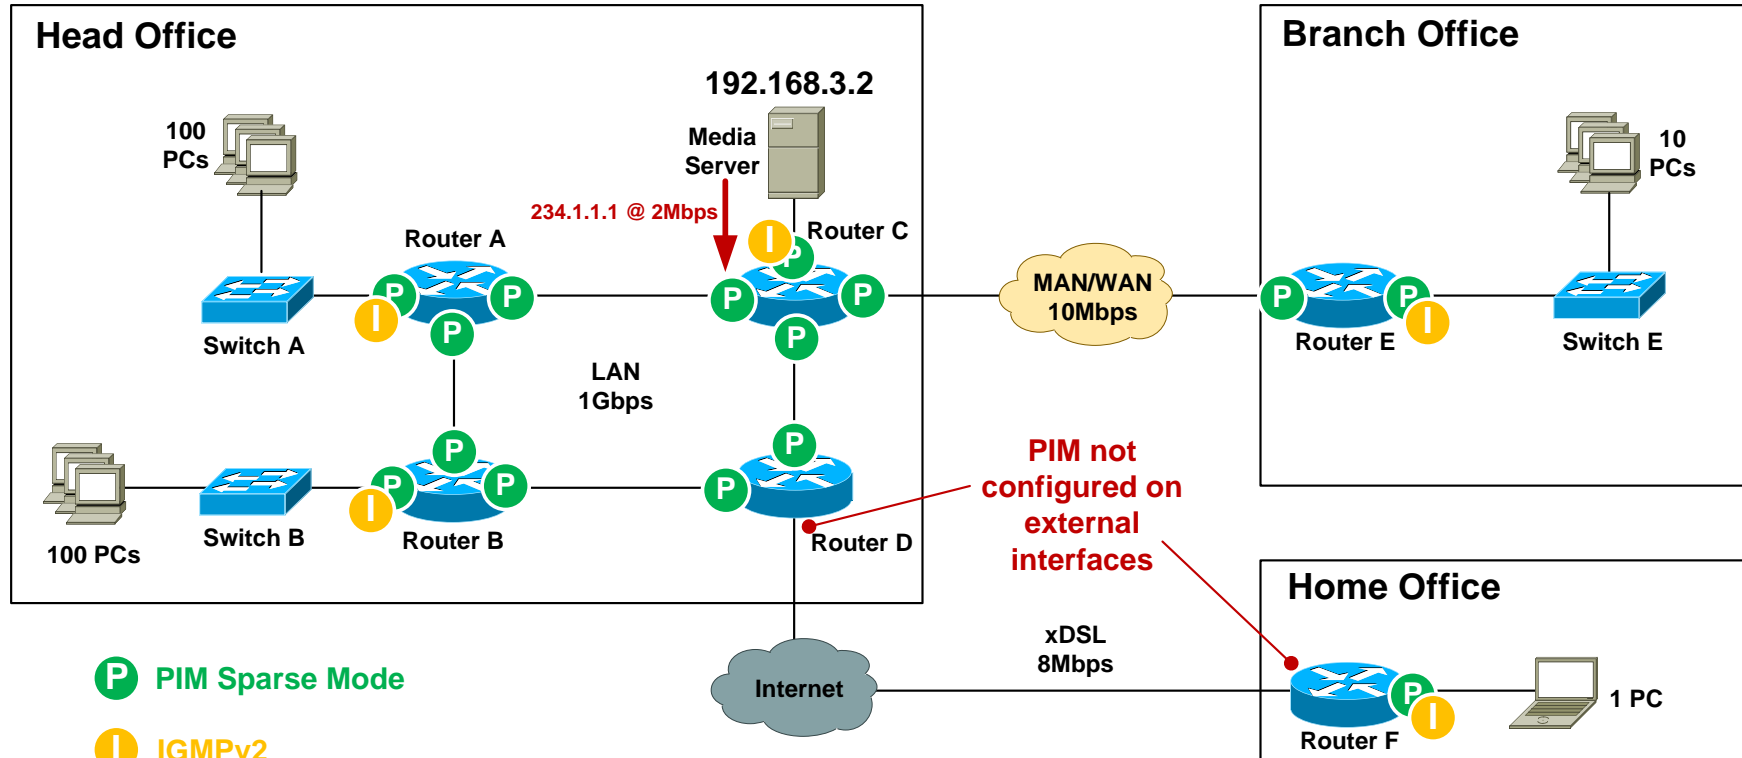

# Case Study – ASM

## Step 4: Verify PIM neighbours

```
Router_A#sh ip pim neighbor
```

```
PIM Neighbor Table
```

Neighbor Address	Interface	Uptime/Expires	Ver	DR Prio/Mode
10.0.0.5	FastEthernet0/3	1d02h/00:01:17	v2	1 / DR S
10.0.0.3	FastEthernet0/2	1d01h/00:01:31	v2	1 / DR

```
Router_A#
```

- Note: when PIM is enabled on an interface, IGMPv2 is also automatically enabled on that interface.




# Case Study – ASM

## Step 5: Select RP router

- RP should be in a central location between sender and receivers.
- CPU grunt not critical as RP processing overhead is low.
- Select a router that has high network availability.
- Ensure the RP has a /32 loopback address as the source.
- Recommended to assign loopback address dedicated for RP use only (not used for router ID etc).

# Case Study - ASM

## Step 5: Select RP router

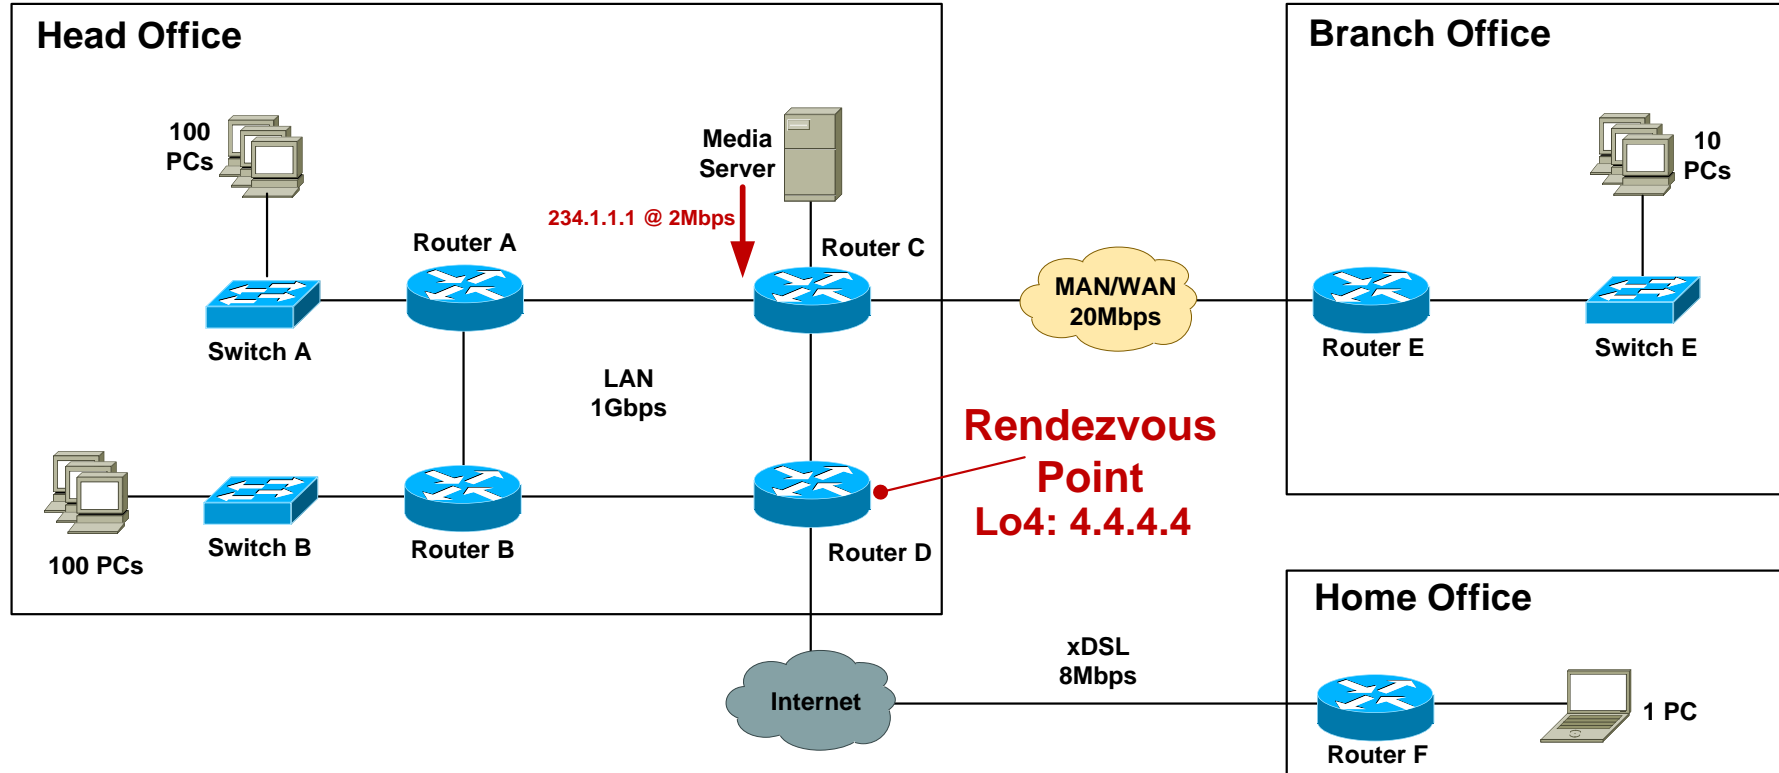

# Case Study – ASM

## Step 6: Configure static RP on all routers (including the RP)

```
ip access-list standard MC_Group_1
  permit 234.1.1.0 0.0.0.255

Router_C#conf t
Enter configuration commands, one per line.  End with CNTL/Z.

Router_C(config)#ip pim rp-address 4.4.4.4 MC_Group_1
```

## Step 7: Verify RP to Group mappings

```
Router_C#sh ip pim rp mapping

PIM Group-to-RP Mappings
Acl: MC_Group_1, Static
  RP: 4.4.4.4 (Router_D)
Router_C#
```


# Case Study – ASM

## Step 8: Enable multicast over non-multicast networks


- Use GRE, L2TPv2, L2TPv3 to tunnel MC over non-MC networks
- Need a static mroute for **both** the RP address and the MC source address for RPF check to pass.
- [http://www.cisco.com/en/US/tech/tk828/technologies\\_configuration\\_example09186a00801a5aa2.shtml](http://www.cisco.com/en/US/tech/tk828/technologies_configuration_example09186a00801a5aa2.shtml)

# Case Study - ASM

## ■ Step 8: Enable multicast over non-multicast networks

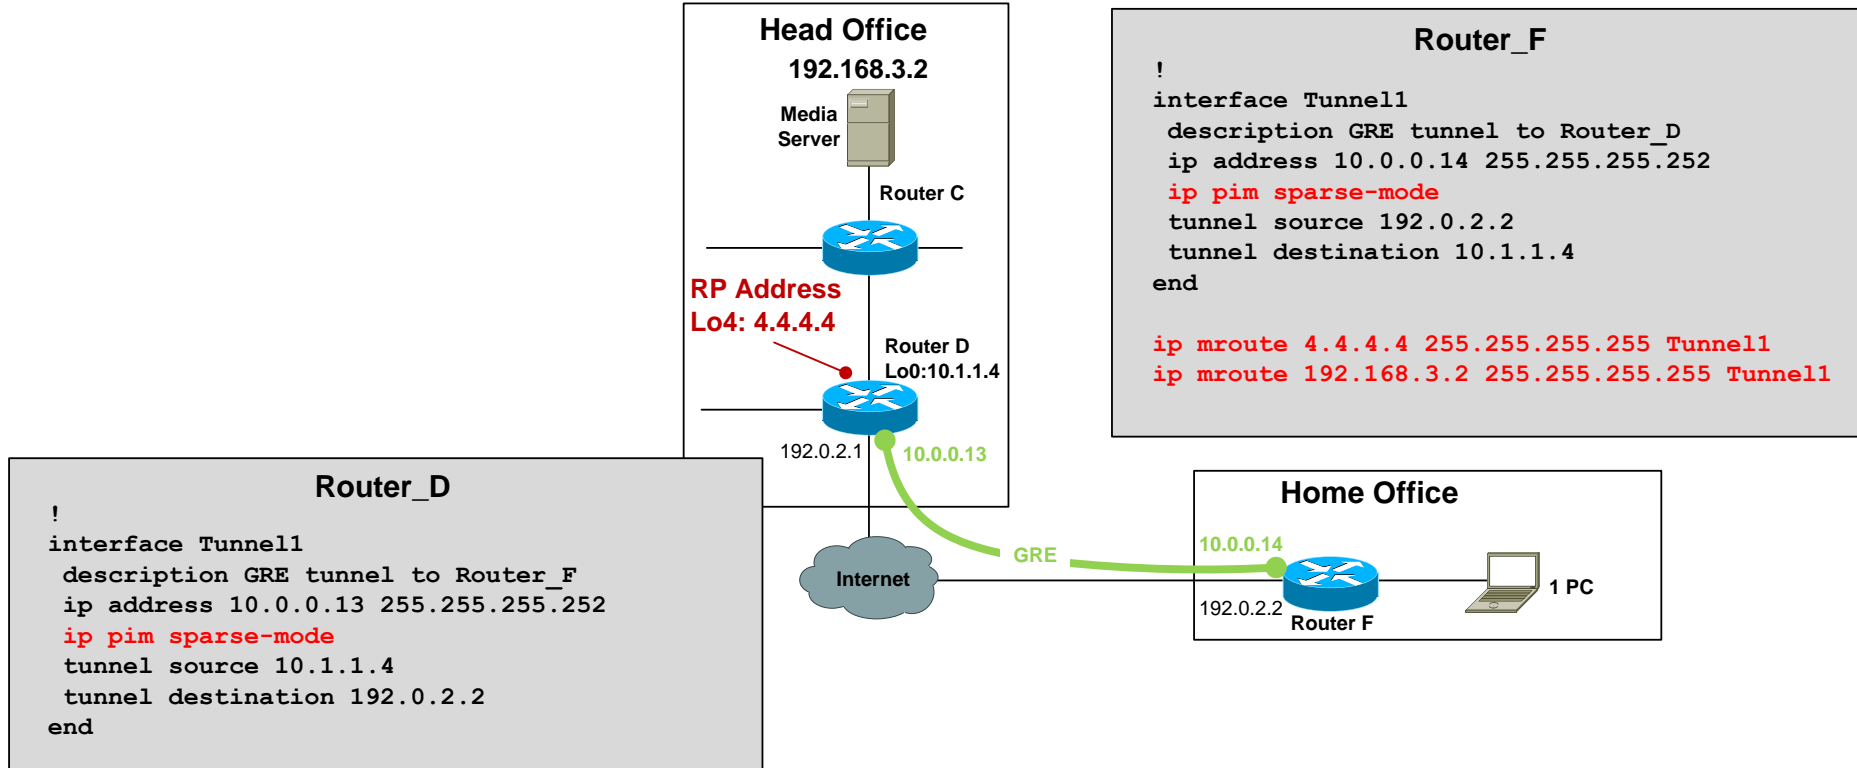

# Case Study – ASM – IGMP Verification

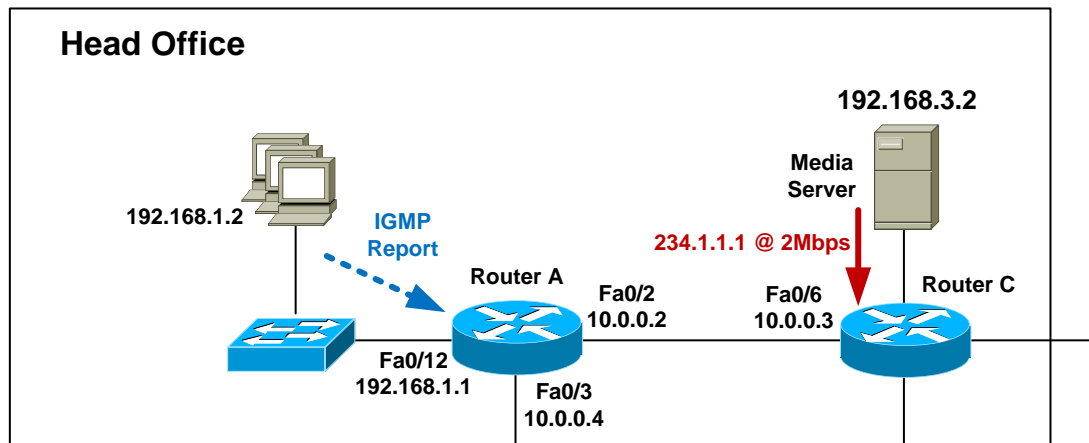

```
Router_A#sh ip igmp membership
```

```
Flags: A - aggregate, T - tracked
```

```
      L - Local, S - static, V - virtual, R - Reported through v3
```

```
      I - v3lite, U - Urd, M - SSM (S,G) channel
```

```
      1,2,3 - The version of IGMP the group is in
```

```
<snip>
```

```
Channel/Group
```

```
Reporter
```

```
Uptime
```

```
Exp.
```

```
Flags
```

```
Interface
```

```
* ,234.1.1.1
```

```
192.168.1.2
```

```
00:00:12
```

```
02:47 2A
```

```
Fa0/12
```

```
Router_A#
```

# Case Study – ASM – Mroute Verification

```
Router_A#show ip mroute active
Active IP Multicast Sources - sending >= 4 kbps


Group: 234.1.1.1, (Stream_1)
  Source: 192.168.3.2 (Media_Server)
  Rate: 245 pps/1967 kbps(1sec), 1968 kbps(last 20 secs),
        1966 kbps(life avg)
Router_A#
```

```
Router_A#show ip mroute
IP Multicast Routing Table
<snip>
Timers: Uptime/Expires
Interface state: Interface, Next-Hop or VCD, State/Mode

(*, 234.1.1.1), 00:08:40/stopped, RP 4.4.4.4, flags: SJC
  Incoming interface: FastEthernet0/3, RPF nbr 10.0.0.5
  Outgoing interface list:
    FastEthernet0/12, Forward/Sparse, 00:08:40/00:02:11

(192.168.3.2, 234.1.1.1), 00:08:40/00:02:56, flags: JT
  Incoming interface: FastEthernet0/2, RPF nbr 10.0.0.3
  Outgoing interface list:
    FastEthernet0/12, Forward/Sparse, 00:08:40/00:02:11
```

## Head Office

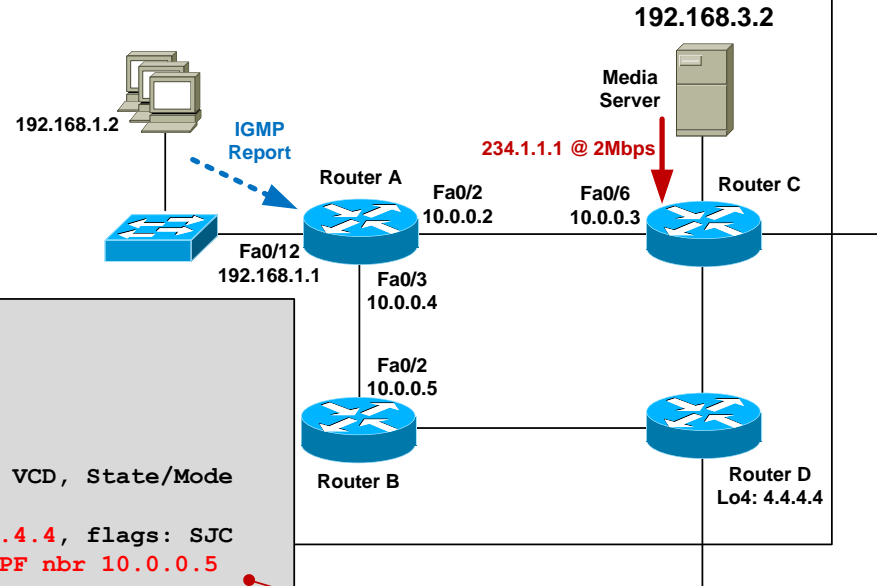

How Router\_A receives MC traffic via the RP (src IP unknown)


How Router\_A receives MC traffic directly from the source (src IP known)

# Case Study – Design Options

- Option 1: Any Source Multicast (ASM) design
  - Hosts run IGMPv2
  - Network runs PIM-SM
- Option 2: Source Specific Multicast (SSM) design
  - Hosts run IGMPv3
  - Network runs PIM-SSM
- Option 3: SSM design with IGMP mapping
  - Hosts run IGMPv2
  - Network runs PIM-SSM with source address mapping



# Case Study – SSM

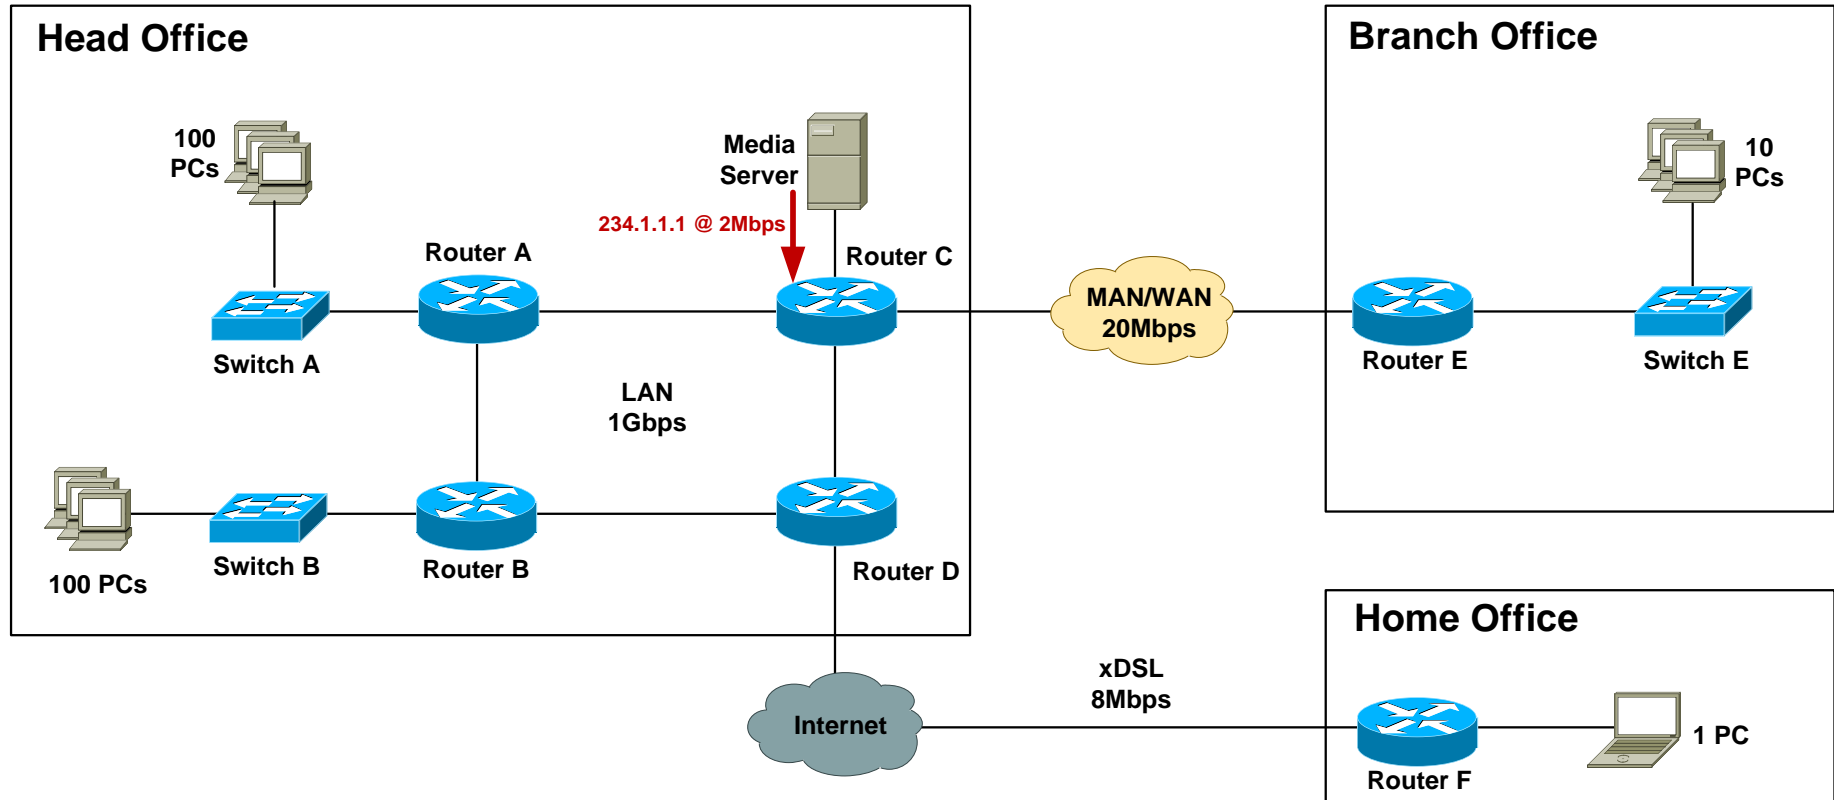

# Case Study – SSM

## Step 1: Configure all routers for SSM

- Globally enable multicast routing:

```
Router_A(config)#ip multicast-routing
```

- Configure PIM-SSM ranges:

```
! Define ACL for SSM ranges (default is 232.0.0.0/8)

Router_A(config)#ip access-list standard SSM-Groups
Router_A(config-std-nacl)#permit 234.0.0.0 0.255.255.255

! Configure SSM range

Router_A(config-std-nacl)#ip pim ssm range SSM-Groups
Router_A(config)#
```

# Case Study – SSM

## Step 2: Configure IGMP


- IGMPv3 snooping enabled by default on Cisco devices
- Need to explicitly configure IGMPv3 on router interface that connects to LAN

```
Router_A(config)#int fast 0/12
Router_A(config-if)#ip igmp version 3
Router_A(config-if)#
```

```
Router_A#sh ip igmp interface fast 0/12
FastEthernet0/12 is up, line protocol is up
Internet address is 192.168.1.1/24
IGMP is enabled on interface
Current IGMP host version is 3
Current IGMP router version is 3
IGMP query interval is 60 seconds
IGMP querier timeout is 120 seconds
<snip>
Router_A#
```

# Case Study – SSM


## Step 3: Configure all internal links for PIM-SM

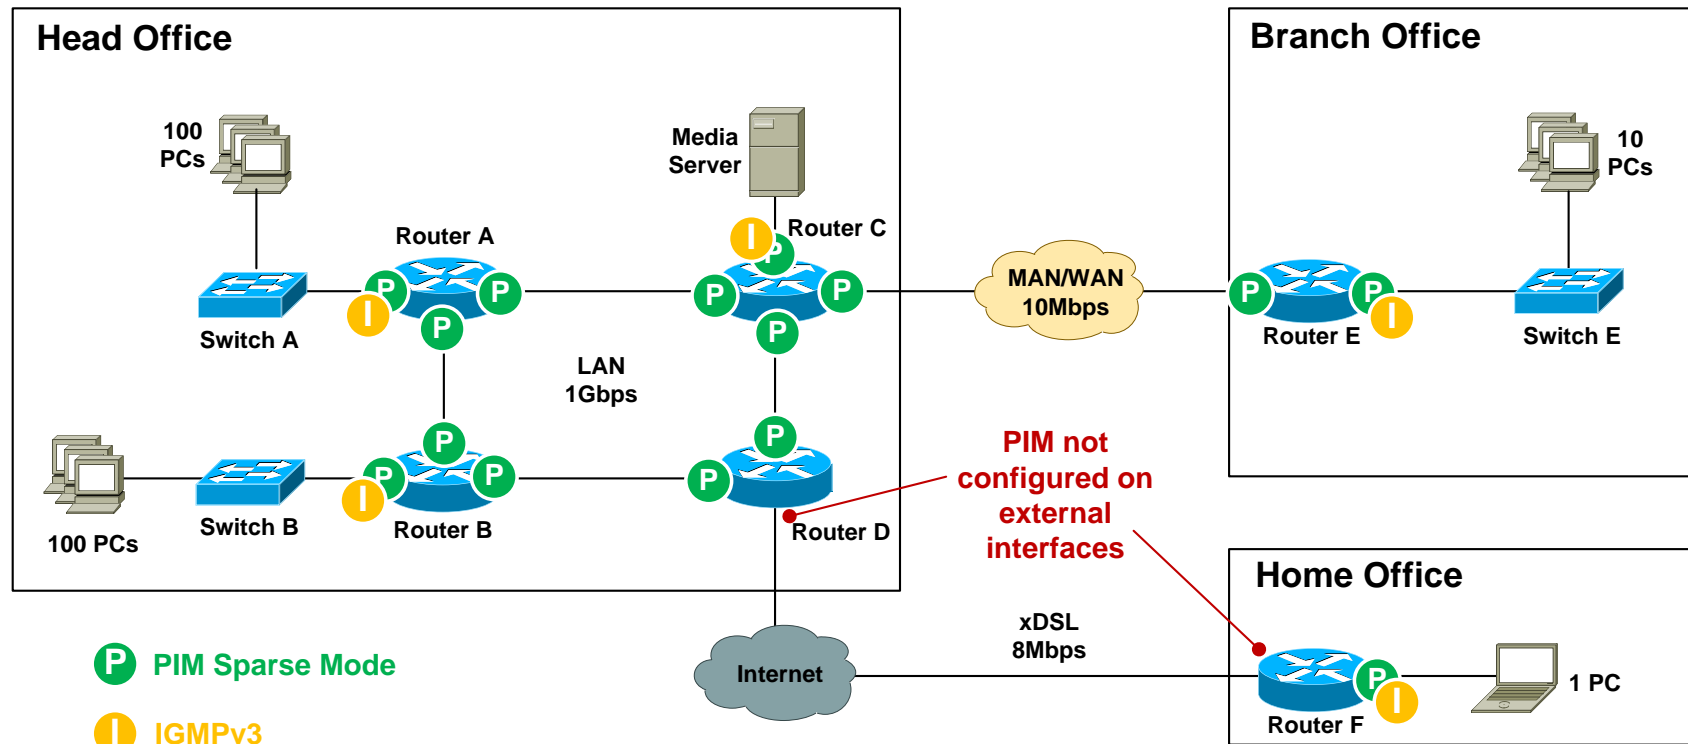


# Case Study – SSM

## Step 4: Enable multicast over non-multicast networks

- Need a static mroute for MC source only

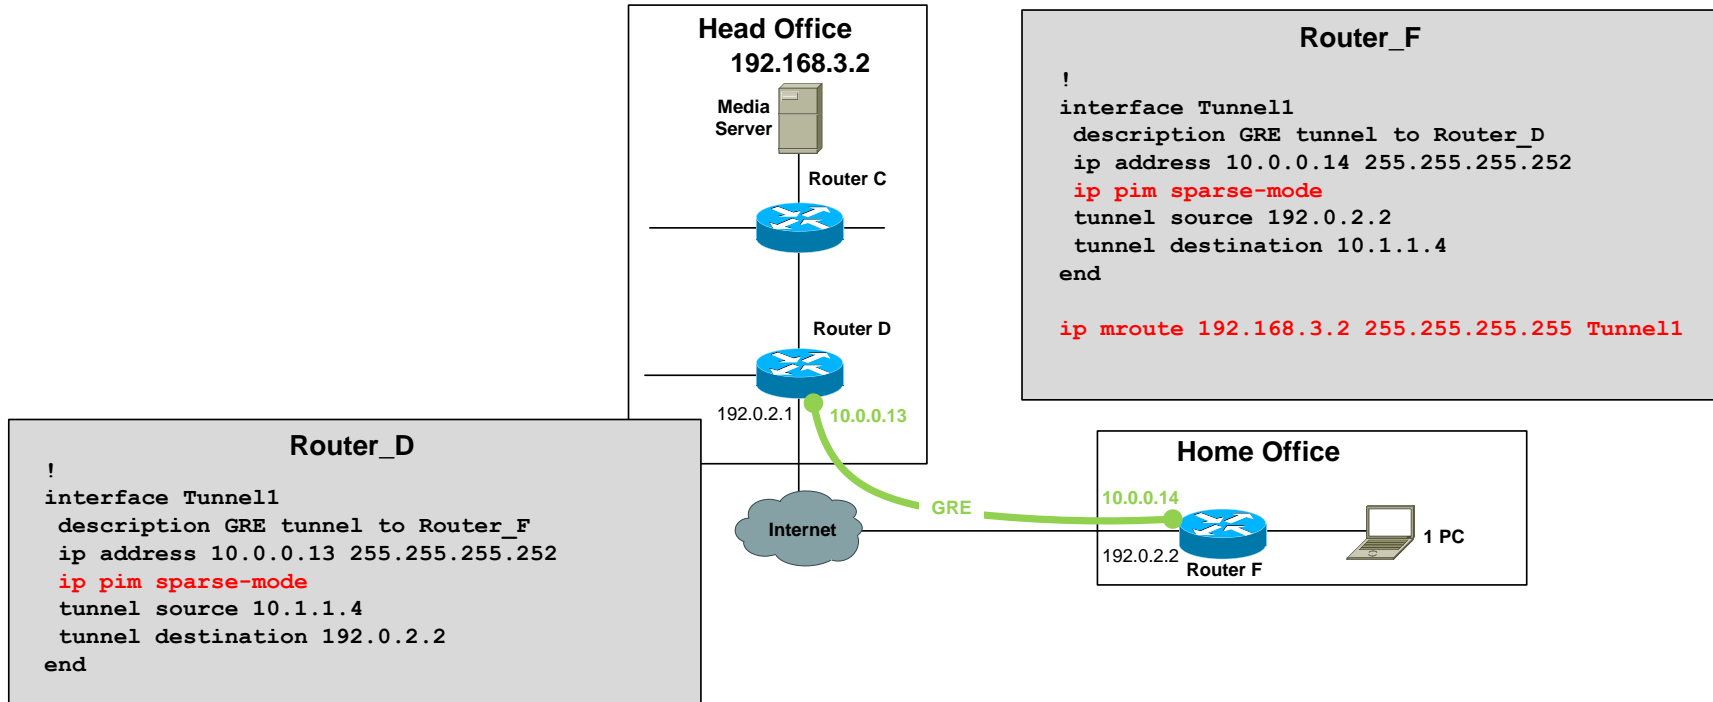

# Case Study – SSM – IGMP Verification

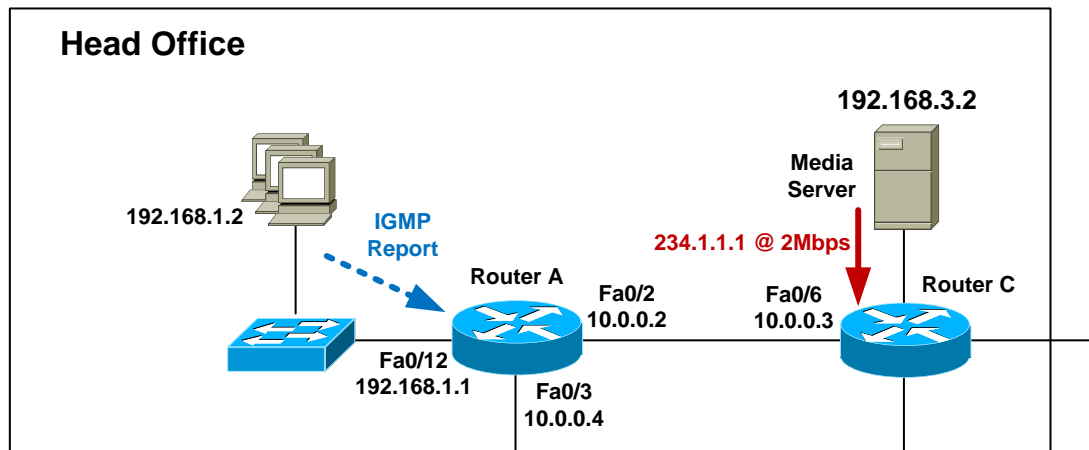

```
Router_A#show ip igmp membership
```

```
Channel/Group-Flags:
```

```
/ - Filtering entry (Exclude mode (S,G), Include mode (*,G))
```

Channel/Group	Reporter	Uptime	Exp.	Flags	Interface
/*,234.1.1.1	192.168.1.2	00:43:29	stop	3MA	Fa0/12
192.168.3.2,234.1.1.1		00:43:29	02:03	RA	Fa0/12

```
Router_A#
```

# Case Study – SSM – Mroute Verification


```
Router_A#show ip mroute active
Active IP Multicast Sources - sending >= 4 kbps

Group: 234.1.1.1, (Stream_1)
Source: 192.168.3.2 (Media_Server)
Rate: 245 pps/1967 kbps(1sec), 1968 kbps(last 20 secs),
1966 kbps(life avg)
Router_A#
```

```
Router_A#show ip mroute
IP Multicast Routing Table
Flags: D - Dense, S - Sparse, B - Bidir Group, s - SSM Group
T - SPT-bit set, J - Join SPT, M - MSDP created entry,
U - URD, I - Received Source Specific Host Report,
Timers: Uptime/Expires
Interface state: Interface, Next-Hop or VCD, State/Mode

(192.168.3.2, 234.1.1.1), 00:59:25/00:02:51, flags: sTI
Incoming interface: FastEthernet0/2, RPF nbr 10.0.0.3
Outgoing interface list:
FastEthernet0/12, Forward/Sparse, 00:59:01/00:02:05
```

## Head Office

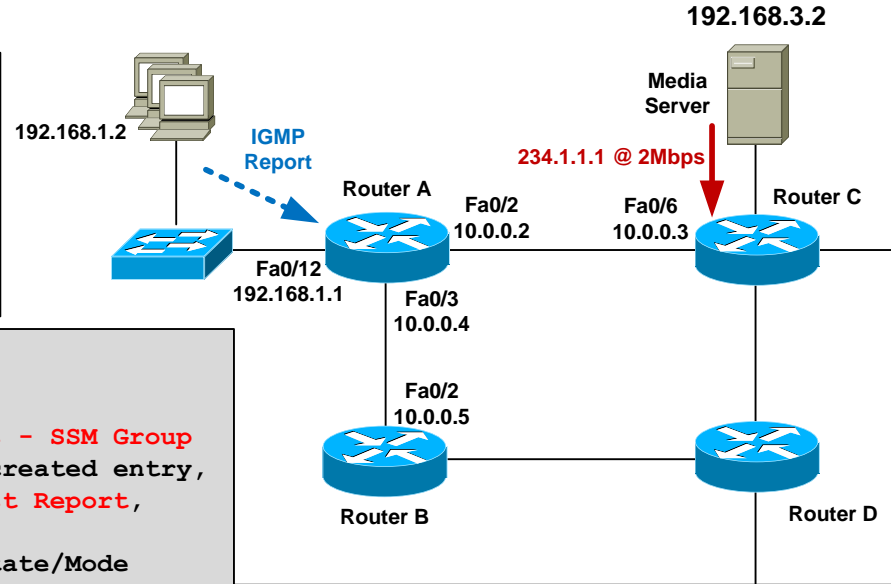

Note there is only (S,G) entry and no (\*,G) as no RP is present

# Case Study – Design Options

- Option 1: Any Source Multicast (ASM) design
  - Hosts run IGMPv2
  - Network runs PIM-SM
- Option 2: Source Specific Multicast (SSM) design
  - Hosts run IGMPv3
  - Network runs PIM-SSM
- Option 3: SSM design with IGMP mapping
  - Hosts run IGMPv2
  - Network runs PIM-SSM with source address mapping



# Case Study – IGMPv2 + PIM-SSM

## Step 1: Configure IGMPv2 snooping on access switches

- IGMP snooping enabled by default on Cisco devices
- Configure “**ip igmp snooping vlan <x> immediate-leave**”

```
Switch_A#sh ip igmp snooping vlan 10
Vlan 10:
-----
IGMP snooping                        : Enabled
IGMPv2 immediate leave              : Enabled
Multicast router learning mode      : pim-dvmrp
CGMP interoperability mode          : IGMP_ONLY
Robustness variable                 : 2
Last member query count             : 2
Last member query interval          : 1000

Switch_A#
```

# Case Study – IGMPv2 + PIM-SSM

## Step 2: Configure all routers for multicast


- Globally enable multicast routing:

```
Router_A(config)#ip multicast-routing
Router_A(config)#do show ip multicast global
Multicast Routing: enabled
Multicast Multipath: disabled
Multicast Route limit: No limit
Multicast Triggered RPF check: enabled
Multicast Fallback group mode: Sparse
Router_A(config)#
```

- Configure PIM on all internal router interfaces:

```
Router_A(config-if)#int fast 0/3
Router_A(config-if)#ip pim sparse-mode
Router_A(config-if)#
```

# Case Study – IGMPv2 + PIM-SSM

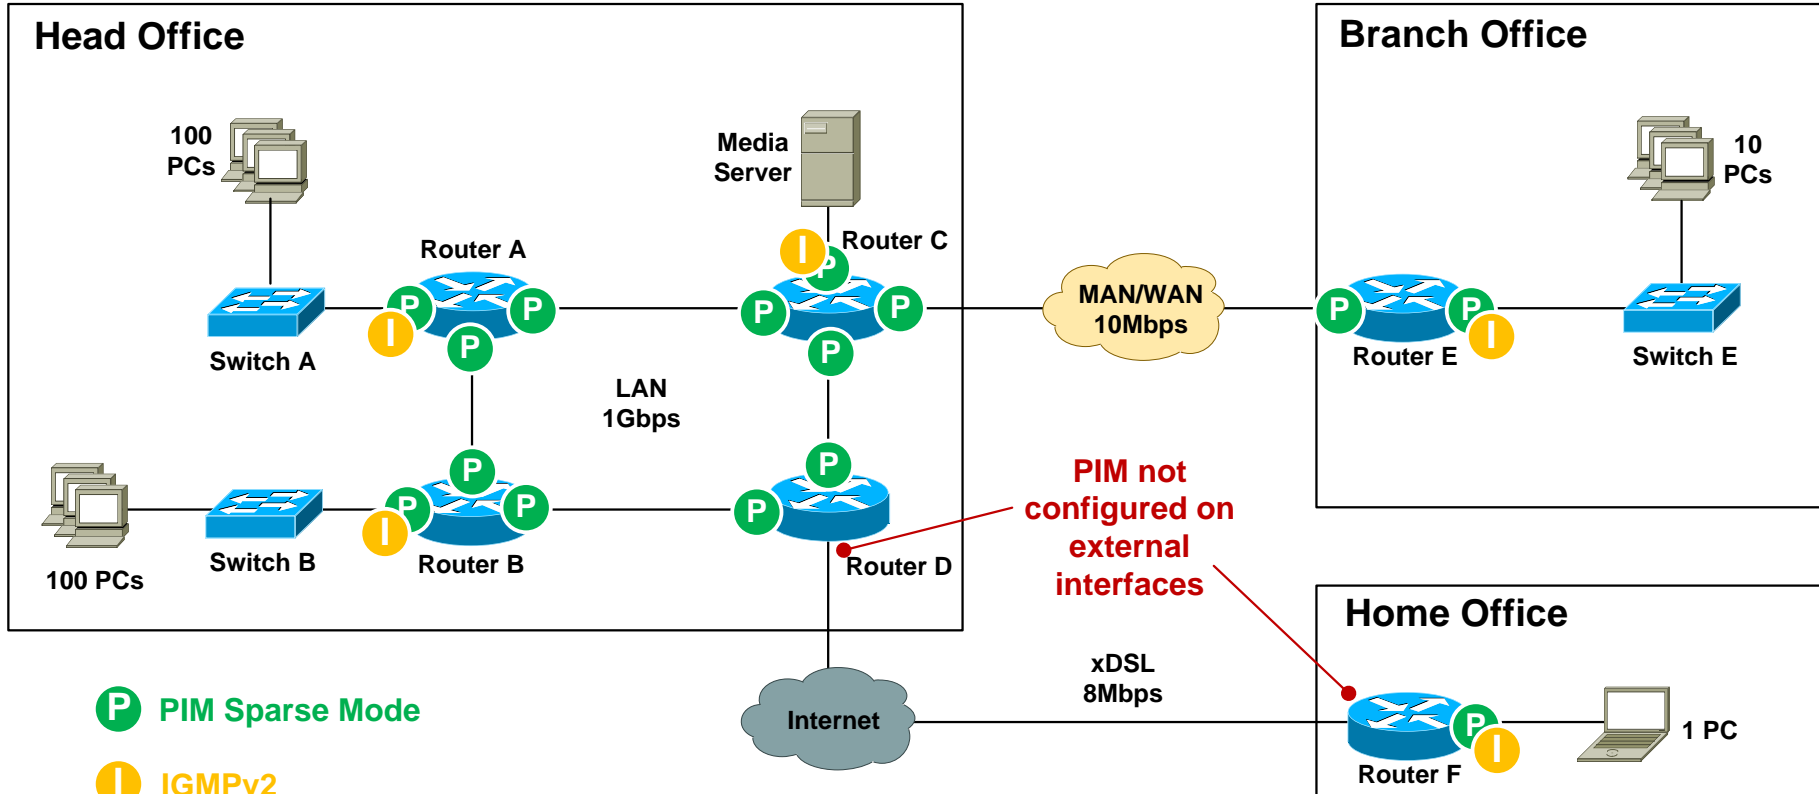

# Case Study – IGMPv2 + PIM-SSM

## Step 3a: Configure static IGMP SSM mapping

- Globally enable IGMP mapping

```
Router_A(config)#ip igmp ssm-map enable
```

- Configure static group-to-source mapping using ACL:

```
Router_A(config)#no ip igmp ssm-map query dns  
Router_A(config)#access-list 10 permit host 234.1.1.1  
Router_A(config)#ip igmp ssm-map static 10 192.168.3.2
```

**“When I see an IGMPv2 report for groups defined in ACL 10, assign the source address 192.168.3.2”**

# Case Study – IGMPv2 + PIM-SSM


## Step 3b: Configure dynamic IGMP SSM mapping

- Globally enable IGMP mapping

```
Router_A(config)#ip igmp ssm-map enable
```

- Configure dynamic group-to-source mapping using DNS:


```
Router_A(config)#ip igmp ssm-map query dns  
Router_A(config)#ip name-server 192.168.3.10
```



**“When I see an IGMPv2 report for any group, perform a reverse DNS lookup to obtain the source address”**

# Case Study – IGMPv2 + PIM-SSM

## IGMP SSM mapping configuration locations

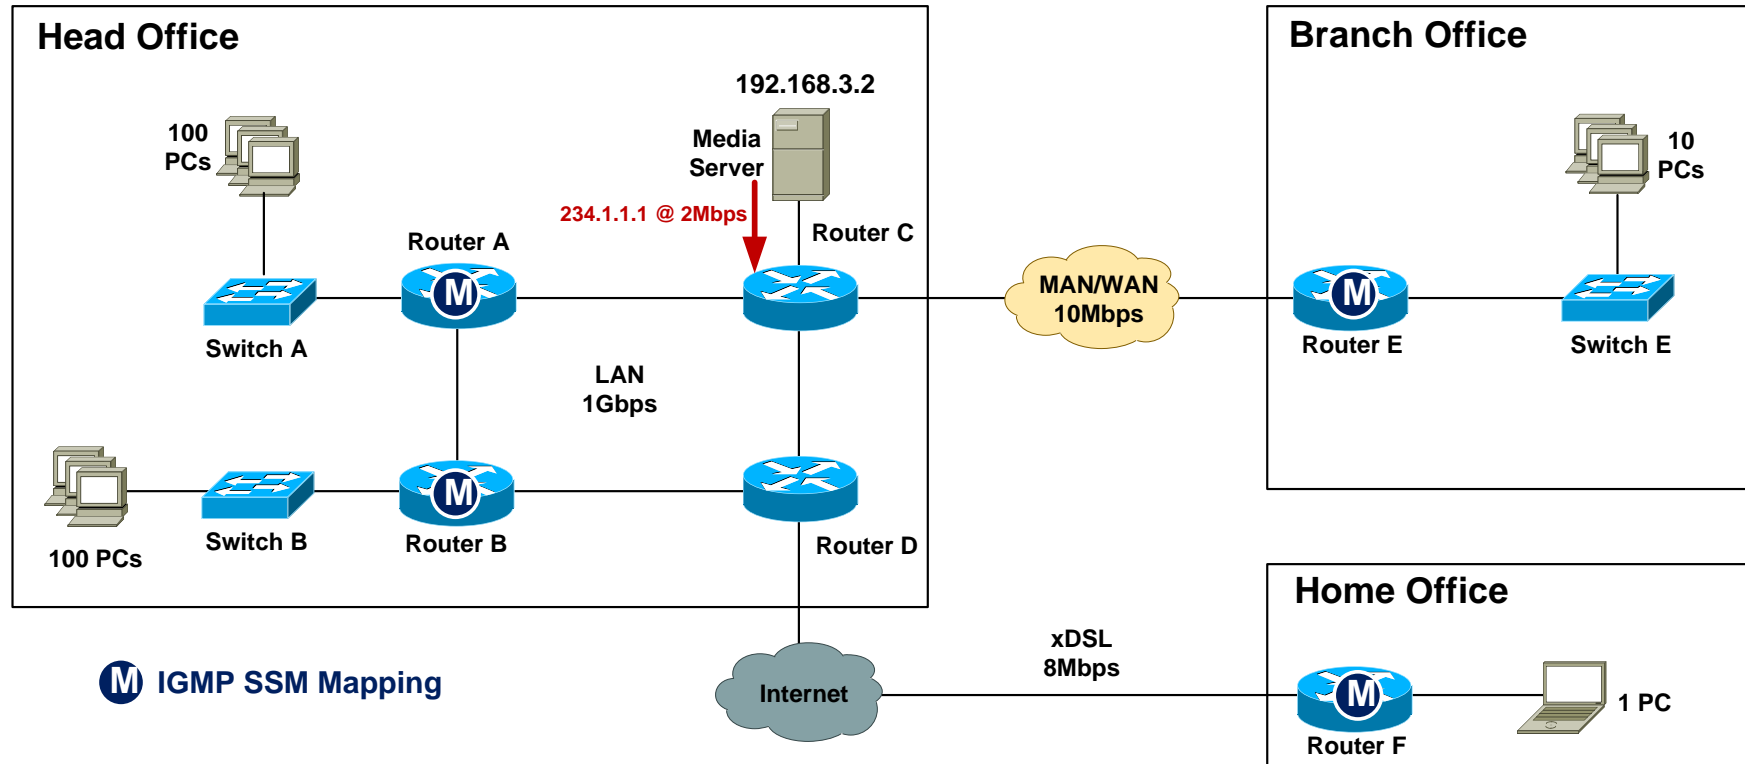

# Case Study – SSM Mapping Verification

## Step 4: Verify IGMP mapping

- Static mapping

```
Router_A#sh ip igmp ssm-mapping 234.1.1.1
Group address: 234.1.1.1
Database      : Static
Source list   : 192.168.3.2
Router_A#
```

- Dynamic mapping

```
Router_A#sh ip igmp ssm-mapping 234.1.1.1
Group address: 234.1.1.1
Database      : DNS
DNS name      : 1.1.1.234.in-addr.arpa
Expire time   : 860000
Source list    : 192.168.3.2
Router_A#
```

# Case Study – SSM Mapping – Verification


## Head Office

```
Router_A#show ip mroute active
Active IP Multicast Sources - sending >= 4 kbps

Group: 234.1.1.1, (Stream_1)
Source: 192.168.3.2 (Media_Server)
Rate: 245 pps/1968 kbps(1sec), 1968 kbps(last 20 secs),
      1967 kbps(life avg)
Router_A#
```

```
Router_A#show ip mroute
IP Multicast Routing Table
Flags: D - Dense, S - Sparse, B - Bidir Group, s - SSM Group
       T - SPT-bit set, J - Join SPT, M - MSDP created entry,
       U - URD, I - Received Source Specific Host Report,
       Timers: Uptime/Expires
Interface state: Interface, Next-Hop or VCD, State/Mode

(192.168.3.2, 234.1.1.1), 01:23:13/00:02:29, flags: sTI
Incoming interface: FastEthernet0/2, RPF nbr 10.0.0.3
Outgoing interface list:
FastEthernet0/12, Forward/Sparse, 00:09:01/00:02:12
```

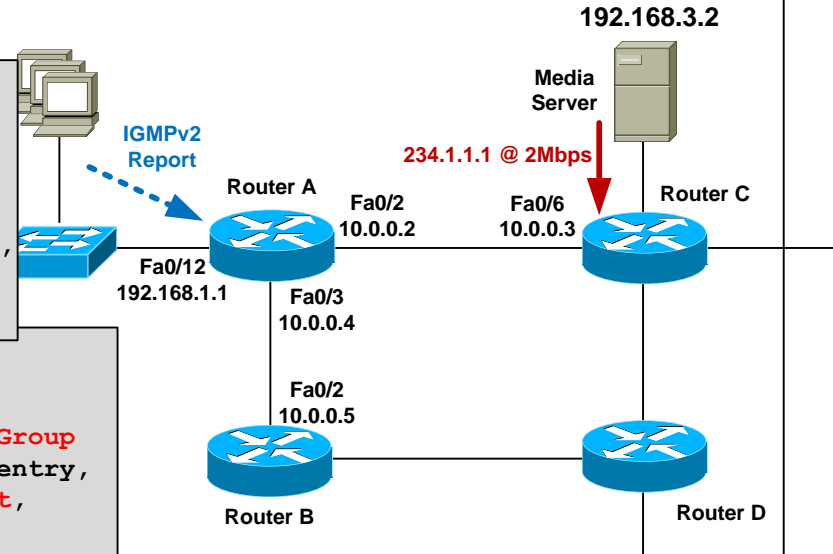

IGMP ssm-mapping not evident in output



# Router-Router Signalling: PIM Choices

- For simple MC deployments, use these guidelines:
  - If your hosts and MC application support IGMPv3, use PIM-SSM
  - If IGMPv3 support is not an option, use PIM-SM and IGMPv2
  - Consider IGMP mapping if IGMPv3 host and application support is “Coming Soon”.

# Troubleshooting

# Mimicking a multicast source

- Use video streaming software on a PC such as VLC:

```
vlc --repeat filename.avi --sout '#standard{access=udp,mux=ts,dst=234.1.1.1:1234}
```

- Use a ping flood or traffic generator to fake it....

```
MC_Source#ping
Protocol [ip]:
Target IP address: 234.1.1.1
Repeat count [1]: 1000000000000
Datagram size [100]: 1300
Timeout in seconds [2]: 0
Extended commands [n]: y
Interface [All]: FastEthernet1/0/24
Source address: 192.168.3.2
Type escape sequence to abort.
Sending 1215752192, 1300-byte ICMP Echos to 234.1.1.1,
  timeout is 0 seconds:
Packet sent with a source address of 192.168.3.2
.....
```

# Mimicking a multicast receiver

- PC running VLC to join MC group

```
vlc udp:@234.1.1.1 (IGMPv2 report)
or
vlc udp:192.168.3.2@234.1.1.1 (IGMPv3 report)
```

- Router joins MC group as if it were a receiver

```
! Send IGMPv2 report for 234.1.1.1
Router(config-if)#ip igmp version 2
Router(config-if)#ip igmp join-group 234.1.1.1

or

! Send IGMPv3 report for 234.1.1.1, source 192.168.3.2
Router(config-if)#ip igmp version 3
Router(config-if)#ip igmp join-group 234.1.1.1 source 192.168.3.2
```

# Mimicking a multicast receiver


- Statically join a router interface to a group

```
Router(config-if)#ip igmp static-group 234.1.1.1
```

```
Router(config-if)#ip igmp static-group 234.1.1.1 source 192.168.3.2
```

```
Router(config-if)#ip igmp static-group 234.1.1.1 ssm-map
```

Receivers are not required.  
Just send the MC stream  
onto the LAN regardless.

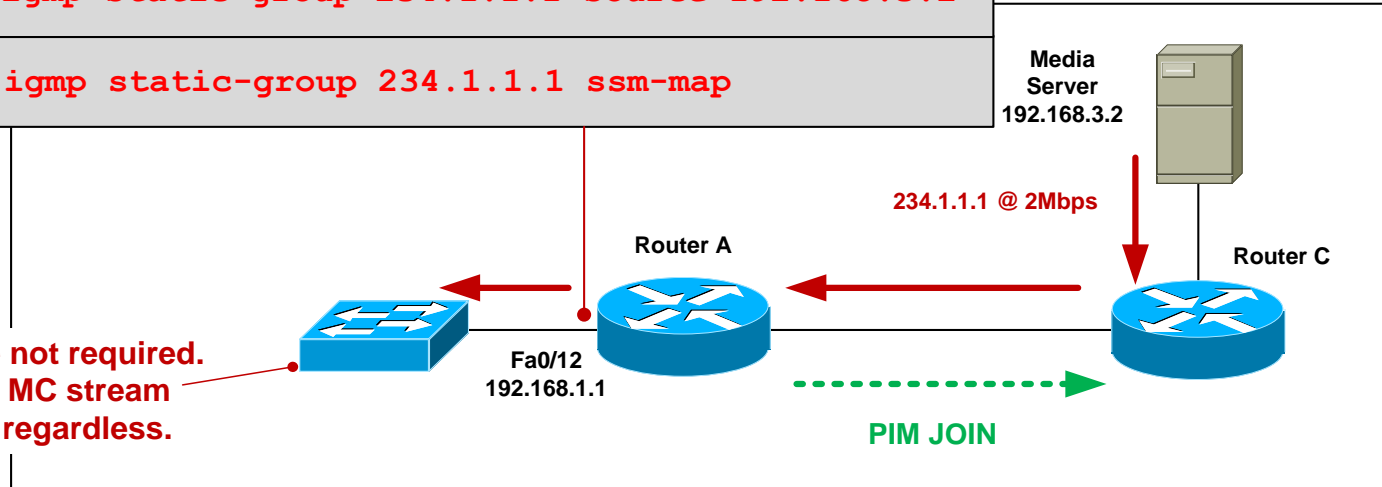

# Common Causes of Multicast Problems

- Source problem
  - Is the source sending the MC stream properly ?
- Receiver issue
  - Is the client asking to receive the stream ?
- Underlying network issue
  - Is the underlying network OK ?
- MC network misconfiguration
  - Is the network configured correctly ?

# Source Not Sending Stream Correctly

- Verify source is actually sending patent MC stream
  - tcpdump, Wireshark, SNMP
- Check first-hop router is receiving MC at correct bit-rate
  - compare current rate to baseline and historical rate

```
Router_C#sh ip mroute active
Active IP Multicast Sources - sending >= 4 kbps

Group: 234.1.1.1, (Stream_1)
  Source: 192.168.3.2 (Media_Server)
    Rate: 165 pps/1324 kbps(1sec), 1964 kbps(last 30 secs), 1963 kbps(life avg)
Router_C#
```


# Source – Low TTL value

- Incorrect source TTL can cause MC stream to be dropped

```
Router_A#show ip mroute
IP Multicast Routing Table
<snip>
(192.168.3.2, 234.1.1.1), 1d18h/00:02:35, flags: sTI
  Incoming interface: FastEthernet0/2, RPF nbr 10.0.0.3
  Outgoing interface list:
    FastEthernet0/12, Forward/Sparse, 1d18h/00:02:35
```

```
Router_A#show ip mroute active
Active IP Multicast Sources - sending >= 4 kbps
Router_A#
```

mroute is accurate  
but no active streams

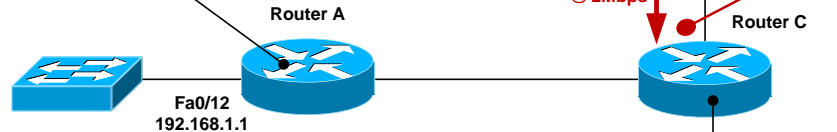

Stream stops at first-hop  
router (TTL=1) or part-way  
into the network (TTL > 1)

```
Router_C#sh ip traffic | i bad hop count
0 format errors, 0 checksum errors, 193949 bad hop count
Router_C#sh ip traffic | i bad hop count
0 format errors, 0 checksum errors, 194069 bad hop count
Router_C#
```



# Receiver Issue

- Use “`debug ip igmp`” to verify IGMP reports are being received.

```
IGMP(0): Received v2 Report on FastEthernet0/12 from 192.168.1.2 for 234.1.1.1
IGMP(0): Received Group record for group 234.1.1.2, mode 2 from 192.168.1.2 for 0 sources
IGMP(0): WAVL Insert group: 234.1.1.1 interface: FastEthernet0/12 Successful
IGMP(0): MRT Add/Update FastEthernet0/12 for (*,234.1.1.1)
```

- If not seeing reports come in, then use packet sniffer on receiver.

# Underlying Network Issue

- The cause of most multicast problems is not multicast (!)

Q: Why might users report a general network issue as a multicast problem ?

A: Small amounts of packet loss, excessive latency or jitter, routing reconvergence are immediately evident to streaming audio/video users.

- Check for interface errors, link congestion, duplex mismatch, routing reachability – Networking 101 stuff !

# Multicast Network Misconfiguration

## ■ Verify

- All internal links have pim sparse mode configured
- RP is configured on all routers (including the RP itself)

```
Router_F#sh ip mroute  
IP Multicast Routing Table  
<snip>
```

```
Timers: Uptime/Expires
```

```
Interface state: Interface, Next-Hop or VCD, State/Mode
```

```
(*, 234.1.1.1), 00:06:17/stopped, RP 0.0.0.0, flags: SJC
```

```
Incoming interface: Null, RPF nbr 0.0.0.0
```

```
Outgoing interface list:
```

```
FastEthernet0/1, Forward/Sparse, 00:06:17/00:02:44
```

**Missing RP configuration**



# Multicast Network Misconfiguration

## ■ Verify

- Network and hosts are running same IGMP version
- Verify RPF check passes

```
Router_F#sh ip mroute
IP Multicast Routing Table
<snip>
(*, 234.1.1.1), 00:15:01/stopped, RP 4.4.4.4, flags: SJC
  Incoming interface: Tunnell1, RPF nbr 10.0.0.13, Mroute
  Outgoing interface list:
    FastEthernet0/1, Forward/Sparse, 00:15:01/00:01:19

(192.168.3.2, 234.1.1.1), 00:04:40/00:02:33, flags: J
  Incoming interface: Null, RPF nbr 0.0.0.0, Mroute
  Outgoing interface list:
    FastEthernet0/1, Forward/Sparse, 00:04:40/00:01:19
Router_F#
```

**RPF Check OK**

**RPF Check Failure  
(should never be 0.0.0.0)**

# Where to From Here.....

- Rendezvous Point Auto-discovery
- High availability
  - Source Redundancy
  - RP Redundancy
  - Fast convergence
- Multicast Security
- Interdomain multicast
- IPv6 multicast

# Additional Resources

- Cisco Live Virtual Breakout Sessions

<https://www.ciscoliveaustralia.com/portal/login.wv>

BRKIPM-2008: Advanced Topics in IP Multicast

BRKIPM-2262: Multicast Security

BRKIPM-2264: Multicast Troubleshooting

BRKIPM-3686: Hardware Architecture for Multicast

BRKIPM-4664: Multicast Traffic Engineering Techniques

- Cisco Live “Meet the Expert” sessions

- CCO documentation: <http://www.cisco.com/go/multicast>

# Q & A

# Complete Your Online Session Evaluation

Complete your session evaluation:

- Directly from your mobile device by visiting [www.ciscoliveaustralia.com/mobile](http://www.ciscoliveaustralia.com/mobile) and login by entering your badge ID (located on the front of your badge)
- Visit one of the Cisco Live internet stations located throughout the venue
- Open a browser on your own computer to access the Cisco Live onsite portal







**CISCO**